RESEARCH ARTICLE

IoT-Enabled Food Freshness Detection Using Multi-Sensor Data Fusion and Mobile Sensing Interface

Mazhar Iqbal[1,*], **Junaid Yousaf**[2], **Atif Khan**[3] and **Tila Muhammad**[3]

[1] Graduate School of Information Science and Technology, The University of Osaka, Osaka 565-0871, Japan
[2] Faculty of Computer Science and Engineering, Ghulam Ishaq Khan Institute of Engineering Sciences and Technology, Topi 23640, Pakistan
[3] Department of Computer Science, Islamia College Peshawar, Peshawar 25120, Pakistan

Abstract

Ensuring the freshness of food products is essential for both acute and chronic health outcomes. However, significant health risks can be triggered by dietary resources subjected to improper storage protocols. Current methods are often unreliable and infeasible for detecting food freshness. This research proposes an IoT-based food freshness detection system that integrates a suite of electrochemical and gas sensors—including pH, moisture, and ethanol sensors—to assess food freshness and reduce health risks associated with spoilage in perishable items like meat, produce, and dairy. The system is integrated with a mobile application that allows users to analyze food quality in real-time, based on predefined degradation thresholds. This study assists in providing valuable insights for future research and improving food safety by contributing to the data storage of food-contextual sensor thresholds. This strategy leads to more informed decision-making by consumers, mitigating food wastage and promoting healthier food choices in the process.

Keywords: food freshness, IoT system, biosensors, mobile application, spoilage detection.

1 Introduction

Ensuring the freshness and quality of perishable food items is essential for safeguarding consumer health and reducing food wastage. Conventional inspection methods employed for checking the freshness of food items are often inherently interpretive and variable, as they often rely on manual sensory examination. This can trigger critical health risks that impact end-users and adverse financial impacts on retailers, as spoilage is not always visually or factually traceable before food has already turned hazardous to consume [1].

In recent years, advancements in smart technologies have paved the way for automated food spoilage detection systems. These systems leverage biosensors alongside physical and chemical indicators to monitor freshness more accurately and consistently [2], with biosensor-based approaches increasingly recognized for their role in sustainable food engineering despite ongoing challenges in sensitivity and integration [3]. However, many of these technologies are either too complex for everyday use or lack real-time

Submitted: 14 March 2025
Revised: 26 April 2025
Accepted: 02 May 2025
Published: 30 June 2025

Vol. 2, **No.** 2, 2025.
10.62762/TSCC.2025.401245

***Corresponding authors:**
✉ Mazhar Iqbal
mazharicp786@gmail.com

Citation
Iqbal, M., Yousaf, J., Khan, A., & Muhammad, T. (2025). IoT-Enabled Food Freshness Detection Using Multi-Sensor Data Fusion and Mobile Sensing Interface. *ICCK Transactions on Sensing, Communication, and Control*, 2(2), 122–131.

© 2025 ICCK (Institute of Central Computation and Knowledge)

feedback, making them impractical for widespread implementation in personal or small-scale retail environments [1].

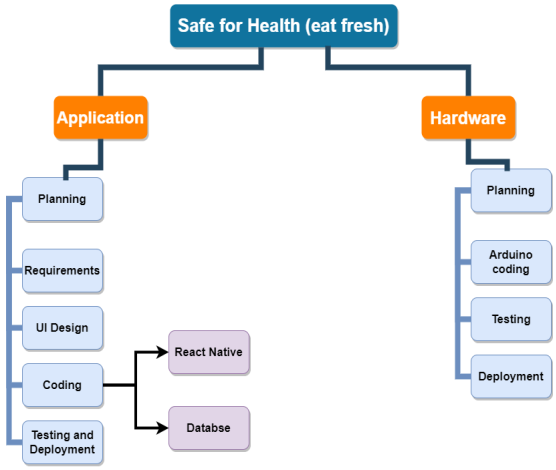

Figure 1. Work breakdown structure (WBS) for the safe for health system, outlining key tasks in application and hardware development.

Consumers acquiring products at community food stores or street vendors, in the majority of cases, have no access to reliable food freshness detection tools, despite the critical significance of food safety standards. As a result, unwarranted food waste and an elevated risk of foodborne diseases can arise from this unintentional consumption of spoiled food products, as microbial contamination linked to inadequate spoilage assessment and date labeling continues to drive both food waste and illness [4, 5]. Consumers are confronted with a substantial lack of understanding when making food-specific decisions, given that current detection methods offer suboptimal accuracy, accessibility, and convenience [6]. The application of artificial intelligence in the food industry has been identified as a promising avenue to address these limitations, yet practical deployment remains constrained by cost and complexity [7].

To bridge this gap, we introduce the development of an IoT-Based Food Freshness Detection System tailored for individualized supermarket environments, as shown in Figure 1, which outlines the project-level task decomposition. The operational data flow of the system is further detailed in the Level 1 DFD presented in Figure 3 in Section 3. The system integrates biosensors and gas sensors with a microcontroller (e.g., NodeMCU) to detect food-specific spoilage indicators, such as changes in pH, moisture content, and ethanol concentration commonly associated with the microbial decay of fruits, vegetables, meat, and dairy products — building upon sensing platforms previously demonstrated in smart packaging contexts for continuous freshness indication [8]. Alerts are generated using a buzzer when spoilage is detected, and transmitted to the cloud for remote monitoring, enabling real-time feedback and transparency through the network of Internet of Things (IoT).

Furthermore, our methodology will integrate machine learning algorithms to predict the product longevity and spoilage probability of food items from different vendors. This predictive ability will be aimed at promoting healthier consumer tendencies and greater market accountability by encouraging retailers to maintain higher quality standards and keep the customers informed.

This research introduces an innovative solution to the problem of food spoilage detection and freshness monitoring. Integrating advanced sensor technology with the IoT aims to provide a more accurate, efficient, and accessible way to assess the quality of perishable food items. The system combines real-time monitoring, machine learning predictions, and a user-friendly mobile interface. It empowers consumers with reliable freshness data, reducing food waste and improving food safety as shown in Figure 2. Below are the key contributions of this research.

- Development of an IoT-based freshness detection system integrating a sensor suite of electrochemical and gas sensors for multi-parameter freshness assessment.
- Real-time freshness monitoring through IoT connectivity and mobile application.
- Cloud-based data logging and transparency for tracking spoilage occurrences over time.
- Design a user-friendly mobile application to deliver real-time freshness information and alerts.
- Creation of a food-specific sensor threshold database for accurate spoilage detection.
- Contribution to food safety and waste reduction by empowering consumers with reliable freshness data.

This system has the potential to revolutionize how food quality is monitored in decentralized retail settings by automating freshness detection through affordable and accessible technology. It empowers consumers with real-time information, enhances food safety, reduces manual inspection efforts, and significantly

Figure 2. Comprehensive food freshness and quality testing system with real-time monitoring for safe consumption.

mitigates food waste.

2 Related Work

In recent years, the integration of IoT technologies with biosensors has revolutionized food safety and quality monitoring. This section explores recent advancements in this domain, highlighting key studies that have contributed to the development of a smart food freshness detection system. The study [8] reviewed the application of sensors embedded in smart packaging for real-time food quality and safety monitoring. The paper discussed how packaging-integrated sensing platforms can provide continuous freshness indicators, offering a practical foundation for IoT-based spoilage detection systems such as the one proposed in this work. The advent of Food Safety 4.0 has seen the emergence of intelligent biosensors that combine biosensing technology with digital systems. These sensors are capable of detecting hazards like pathogens and contaminants early, enabling proactive risk management in the food supply chain [9]. By integrating with IoT frameworks, they facilitate real-time monitoring and enhance the reliability of food safety tracking and tracing [10].

Addressing the challenges of monitoring diverse food materials in storage, researchers have developed IoT systems capable of real-time parameter monitoring. These systems consist of sensors directly linked to food items, with data processed by controllers like NodeMCU and communicated to mobile applications. Such setups allow for timely detection of spoilage, thereby reducing food waste and associated health risks [11].

The integration of biosensors into food quality monitoring systems has enabled rapid, accurate, and on-site detection of contaminants. This approach enhances the management of food safety risks throughout the supply chain, ensuring the integrity and safety of food products. The use of biosensors represents a critical advancement in mitigating risks associated with foodborne illnesses [12].

Smart bio-systems have been developed to monitor a wide range of factors, including microbial contamination, chemical residues, nutrient levels, and freshness indicators. By providing real-time data, these systems facilitate timely interventions to prevent food spoilage and ensure safety. The integration of such systems into the food supply chain represents a significant advancement in food safety management [13].

The proliferation of mobile technology has led to the development of applications that assist users in assessing food freshness. For instance, deep learning–based applications have been designed to help older adults recognize rotten food, thereby preventing foodborne illnesses. These tools utilize chemical sensors and machine learning algorithms to detect spoilage in various food items [14].

Recent studies have explored the use of federated learning-driven IoT systems for automated freshness classification. Achieving high accuracy in freshness classification ensures that spoiled goods are identified and removed from sale, reducing foodborne illness risks and promoting public health. Accurate monitoring also minimizes spoilage, leading to reduced financial losses and better inventory management [15].

Advancements in machine learning have facilitated the development of smartphone applications capable of on-site colorimetric food spoilage monitoring. These apps achieve high classification accuracy and provide real-time updates, empowering consumers to make informed decisions about food consumption [16].

Rapid sensing methods have been developed specifically for meat-based product freshness monitoring, enabling timely detection of spoilage before products reach consumers. These sensor-based

approaches demonstrate how targeted detection techniques can be adapted into food safety systems to improve accuracy and reduce waste [17]. The adoption of IoT solutions contributes to a more sustainable and secure food supply chain [18]. Intelligent monitoring and evaluation of key quality parameters throughout the cold chain have been identified as critical mechanisms for ensuring meat safety and extending shelf life. Comprehensive approaches to meat cold chain logistics incorporate smart packaging, dynamic shelf-life prediction, and sensor-based tracking of parameters such as pH and humidity, establishing the technical foundation upon which accessible freshness detection systems like the one proposed in this work are built [19].

The development of disposable NFC-enabled wireless gas sensors has enabled continuous monitoring of food spoilage. These sensors provide real-time data on gas emissions from food products, facilitating timely interventions to prevent consumption of spoiled food [20].

3 Proposed Methodology

The pH sensor, the moisture sensor, and the ethanol sensor are the three chemical and physical sensors used to assess food freshness and reduce health risks associated with the consumption of spoiled food. The pH and moisture sensors function as electrochemical biosensors, while the ethanol sensor is a semiconductor gas sensor; together, they are collectively referred to as the sensor suite throughout this work. Some examples of meals and household items that these sensors can identify and determine whether or not they are fresh include dairy products, fruits, and meats. An Arduino UNO board serves as the connecting mechanism. The user enters the data via the mobile app, and then the sensor is placed on the appropriate food item. The value produced from the sensor is compared with the threshold value of the food item via communication carried out utilising a wi-fi module. The microcontroller decides what happens by comparing the sensor data to the food item's threshold value. The microcontroller compares these sensor readings and uses the results. Results are shown as "consumable" or "not consumable," depending on whether the sensor readings fall within the predefined freshness thresholds for each food category.

To ensure the viability of the proposed system in real-world settings, it is crucial to consider several practical implementation factors alongside the sensor selection and system workflow. Cost-effectiveness plays a significant role, particularly if the solution is to be scaled for widespread use in retail environments or consumer homes. While the use of components like Arduino UNO and NodeMCU helps reduce initial costs, further analysis is needed to evaluate long-term affordability, including maintenance and component replacement. Additionally, the battery life and energy consumption of the deployed sensors, especially when used for continuous or real-time monitoring, must be optimized to ensure sustainability and minimize operational disruptions. Another important consideration is the integration of this IoT-based system with existing food supply chain infrastructure, which often varies in complexity and technological readiness. These integration challenges must be addressed to support seamless deployment and ensure compatibility with inventory tracking, logistics, and food storage processes. Tackling these issues will significantly enhance the system's practical feasibility and scalability.

The sensor suite is designed to be extensible, providing labeled binary classification data (edible or not edible) that can support future machine learning integration, as detailed in the Conclusion. Various resources utilised throughout this project are discussed below.

A **Arduino Software Development Environment:**
The Arduino IDE is a cross-platform application written in C/C++ that may be used on Linux, Mac OS X, and Windows, and serves as the primary programming environment for building IoT-based food spoilage detection systems that continuously sense food quality signals and transmit alerts to users via Wi-Fi modules [21]. Arduino's integrated development environment (IDE) is open-source, making it straightforward to use and significantly simplifying the programming process for microcontroller boards. Operating systems, including Windows, Mac OS X, and Linux, are supported. Figure 3 illustrates the step-by-step process of how the application operates and handles data, starting from the beginning and continuing until completion.

B **UNO Arduino:**
The Arduino UNO microcontroller board is equipped with several essential features, including USB connectivity, a power jack, an ICSP header, and a reset button [23]. It also incorporates a 16 MHz ceramic resonator (CSTCE16M0V53-R0). The ATmega328P microcontroller serves as the foundation for

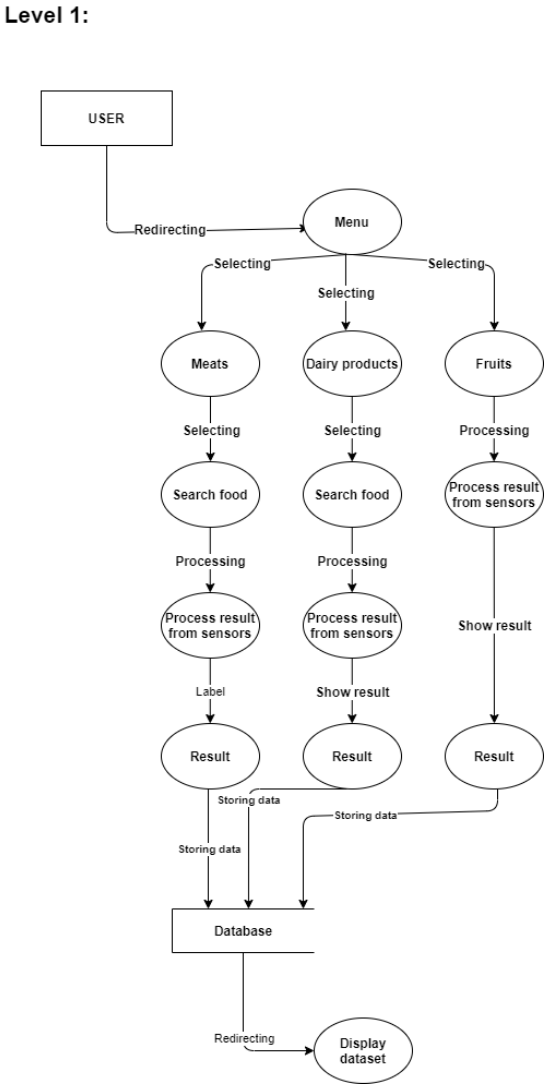

Figure 3. Level 1 DFD illustrating user navigation through categories (Dairy, Meats, Fruits), selection of food items, sensor activation, food testing, and result validation against a spoilage scale, with data stored in a database.

the Arduino UNO board. This microcontroller board is widely deployed in IoT-based food monitoring applications, where sensor-equipped microcontrollers remotely track critical parameters such as temperature and humidity during food processing, and trigger automated alerts when conditions deviate from safe thresholds [22], offering 14 digital I/O pins (with six of them capable of functioning as PWM outputs), six analog input pins, and a 16 MHz clock frequency. Currently, Arduino Software (IDE) version 2.x is utilized to develop and program the "Uno" board. The "Uno" board was historically selected as the reference platform for the initial release of the Arduino Software (IDE) and has since become the de facto standard for Arduino development. The term "Uno" translates to "one" in Italian, signifying its significance as the initial member of a planned succession of USB Arduino boards, and it continues to be widely employed in numerous ongoing projects.

C **Moisture sensor (Detector for Humidity):**
A small amount of water will always be present on its surface, whether a substance is solid or liquid in form. Water, muscle, tissues, bones, and fat are just a few components inherent to meat and poultry. Meat is essential for muscle development and is widely consumed across cultures. The muscular tissue makes up roughly 75% of any cut of beef. The amount of naturally occurring water in chicken and beef products differs depending on the cut and fat content. Meat products with a high water content retain their freshness for longer periods than those with lower water content [24]. Because of the high water content of meat products, their freshness declines as their pH level and chemical composition change over time. Portable sensor-based systems, including those employing electronic nose technology combined with machine learning, have demonstrated strong performance in evaluating freshness-related parameters in meat and poultry, enabling rapid and reliable quality assessment at various points in the supply chain [25].

D **MCU:**
The NodeMCU ESP8266 development board features an ESP 8266 processor with an ESP-12E module. This chip has a Tensilica Xtensa 32-bit LX106 RISC CPU. This specific microprocessor may be set to operate anywhere between 80 MHz and 160 MHz and is compatible with real-time operating systems. The Node MCU can store data and programs on its 128 KB of RAM and 4 MB of flash memory. Thanks to its powerful processing capabilities, built-in Wi-Fi, and deep sleep operating features, it is ideally suited for IoT applications in food quality monitoring—an area where IoT-driven sensor fusion, wireless data transmission, and integration with big data analytics are increasingly recognized as transformative tools for food safety assessment and supply chain transparency [26]. The Node MCU can be powered using either the Micro USB jack or the VIN pin (External Supply Pin). This device supports UART, SPI, and I2C communication protocols, enabling seamless interfacing with multiple sensors.

E **Ethanol Detection Sensor:**
The ethanol in alcohol is a naturally occurring substance. The plant can be utilised to obtain low-concentration Ethanol, which is found in fruits (which can be used as a feeding stimulant) and the plume of ethanol (which can be used to find ripe fruits artificially). We chose the MQ-3 sensor instead of the MQ-135 because it is more sensitive and selective to ethanol, which is essential in properly measuring fruit ripeness and spoilage. The MQ-3 is unlike the MQ-135, which is sensitive to a broad array of gases, and instead offers more accurate readings for ethanol, which means fewer false positives. It functions well within standard food storage environments, is lower power, and is affordable, making it perfect for our battery-driven IoT system. Its already proven performance for this type of food monitoring use again indicates suitability for this study. The fruit's appearance, flavour, sugar, and ethanol content alter as it ripens. Chemical changes occur in ripening fruit due to the accumulation of various gases, including ethylene and ethanol, produced during the ripening process. A banana is a good illustration of this phenomenon, as its ethanol concentration rises measurably during ripening. IoT-enabled gas sensor systems have demonstrated the capability to measure such volatile compound concentrations emitted during food spoilage and ripening, enabling non-invasive freshness assessment across various food categories [20].

F **The PH Sensor:** A pH sensor is one of the most crucial tools for water quality monitoring. In addition to water, this sensor can also measure the alkalinity and acidity of other liquids. A properly implemented PH sensor system can safeguard manufactured goods and processes at wastewater treatment plants. Hydrogen potential, or pH, is a scale used to measure how acidic or basic a solution is. As a logarithmic scale, this test is extremely sensitive to even small changes in pH. Dairy products, such as milk and yogurt, must have a pH value within the normal range. Milk's pH is typically between 6.5 and 6.7. A drop below 6.4 indicates the onset of bacterial fermentation and spoilage. A change of 0.3 in pH indicates that the acid concentration has doubled. Because milk is the fundamental ingredient in all dairy products, changes in pH will affect those goods' flavor, taste, and shelf life. Intelligent biosensor systems—including pH-based detection platforms—are increasingly recommended for monitoring dairy product quality as part of broader Food Safety 4.0 frameworks [10].

4 Experimental Setup

A. **MOBILE APP USER INTERFACE:**
The mobile application interface of the food freshness detection system is designed to be user-friendly and informative, allowing users to assess the freshness of their food items effortlessly, as shown in Figure 4. Upon launching the app, a simple and intuitive layout presents various options for users to select the type of food item they want to analyze, ranging from dairy products to fruits and meats. After selecting the food item, the app guides users to place the relevant sensor, such as a moisture sensor or pH sensor, onto the chosen food item for data collection. The data acquisition process begins, and the sensor measures crucial parameters like moisture content, pH levels, and ethanol concentration, tailored to the specific food item. Through seamless communication with the Arduino UNO board and the Wi-Fi module, the app receives the sensor data—an approach consistent with IoT-based food freshness mobile applications that integrate multiple sensors including temperature, humidity, and ethanol detectors with a real-time Android interface to notify users of food quality status [27]. This data is then compared against predefined threshold values specifically calibrated for each type of food item. The mobile app's user interface rapidly processes this data and displays a clear and concise result. The results are presented to users through a straightforward indicator, showing whether the food item is 'consumable' or 'not consumable,' as shown in Figure 5. For safe-to-consume items, the app may offer additional information, such as freshness level, empowering users to make well-informed decisions about their food choices. With its user-friendly design and real-time analysis capabilities, the mobile application becomes an invaluable tool for users to effortlessly monitor the freshness of their food products. By seamlessly integrating this solution into their daily routine, consumers gain confidence in selecting the freshest and safest food items, thus promoting better health and enhancing their overall dining experience.

Figure 4. Dairy product menu featuring items like milk, yogurt, butter, and cheese, with freshness detected using a pH sensor (scale 0-14) upon user selection and sample testing.

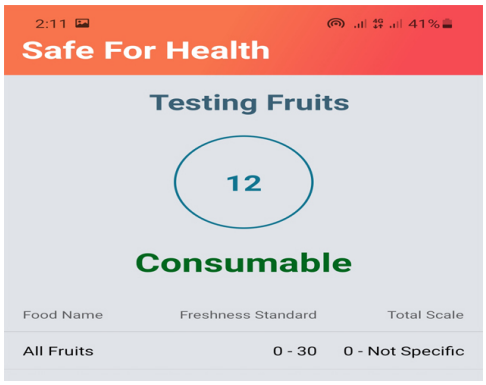

Figure 5. Fruit testing screen using an ethanol sensor to detect freshness, with a standard range of 0-30, capable of identifying fruits ripened with carbide.

B. **HARDWARE USED:**
The food freshness detection system utilizes essential Hardware components to achieve an accurate and real-time assessment of food items. At the heart of the system is the Arduino UNO microcontroller board, which serves as the central processing unit and facilitates communication with the sensors and the mobile application. The system incorporates three crucial sensors forming the sensor suite: the pH sensor, the moisture sensor, and the ethanol gas sensor.

The pH sensor measures acidity and alkalinity levels, while the moisture sensor detects water content, and the ethanol sensor measures ethanol concentration in fruits. These sensors play a pivotal role in capturing vital data regarding food freshness. The Wi-Fi module establishes seamless communication between the Arduino board and the mobile app, enabling users to receive instant results and make well-informed decisions about the consumption of their food products. Figure 6 shows the complete hardware setup of this system. Together, these components ensure an efficient and user-friendly food freshness detection system, empowering consumers to select the freshest and safest food items for a healthier dining experience.

Figure 6. Complete project setup featuring pH, moisture, and ethanol sensors integrated with Arduino UNO and NodeMCU.

5 Results and Discussion

5.1 Results

The components of EatFresh's Safe-for-Health system are the Sensors, the Arduino, and the Mobile Application. Sensors can check the freshness of produce, meats, and dairy products. Second, the values stored in an Arduino (a microcontroller that may be connected to a computer) are transmitted to the mobile app via a special program. The mobile app provides data on numerous dietary groups, such as dairy, meat, and fruits. The percentage of moisture in the meat, the acidity of the dairy, and the ethanol concentration in the fruit are all shown in Table 1. It should be noted that the consumability thresholds vary by food category: for dairy products, a pH range of 6.4–6.8 is considered acceptable for milk; yogurt is evaluated against its own fermented baseline of pH 4.0–4.6; cheese is assessed using a threshold above pH 6.2, below which accelerated acidity may indicate spoilage for the tested variety; for meat products, acceptable moisture levels differ by species (e.g., chicken $\geq$ 75, mutton $\geq$ 70, beef $\geq$ 70); and for fruits, an ethanol gas reading below

30 on the MQ-3 sensor scale is classified as consumable.

Table 1. Consumability status of various items based on pH, moisture, and gas presence.

Food Item	Detection Value	pH	Moisture	Gas	Result
Water	6.7	Yes	No	No	Consumable
Meat	76	No	Yes	No	Consumable
Milk	5.7	Yes	No	No	Not Consumable
Fruits	26	No	No	Yes	Consumable
Cheese	6.3	Yes	No	No	Not Consumable
Chicken	80	No	Yes	No	Consumable
Beef	67	No	Yes	No	Not Consumable
Fruits	32	No	No	Yes	Not Consumable
Mutton	73	No	Yes	No	Consumable
Water	7.5	Yes	No	No	Consumable
Milk	6.8	Yes	No	No	Consumable
Yogurt	4.6	Yes	No	No	Consumable

The proposed system employs a sensor suite to assess whether food is fresh or spoiled. The suite comprises pH and moisture sensors functioning as electrochemical biosensors, and an ethanol gas sensor, all integrated with an Arduino UNO microcontroller. The acidity of dairy products can be determined using a pH sensor, the quantity of moisture and humidity in meat can be determined using a moisture sensor, and the concentration of alcohol gas and ethanol in fruit can be determined using a gas sensor. The final result is stored in the form of a binary, which we can see in Table 1. The ethanol detector is sensitive enough to detect ethanol in the air. Cutting or bruising the apple will cause it to release ethanol-like volatile compounds. Once the Arduino is online via its wi-fi module, it may begin collecting data using the sensors already built into the board. The Arduino has an onboard ADC that can convert analogue signals to digital equivalents. The analogue signal is then connected to an Arduino analogue input pin. Arduino collects data from each sensor and parses the numbers into strings. Wires represent the data collected by the sensors. To process the data, it is transferred from the wi-fi module connected to Arduino and uploaded to the mobile application. In the default approach, data are compared to threshold levels, deciding whether the food is fresh. The smartphone app considers the food's degree of freshness and marks the output as "Consumable" or "Not Consumable." The testing results of the different random foods are stored in Table 1. The data collected is then stored in the cloud-based database that supports the mobile app.

The system's output data is publicly available and can be used by anyone for analysis and trend identification. As shown in Figure 7, the output can be saved in the database and downloaded from the application in CSV format. The collected dataset provides a foundation

Download Dataset

S.No	Name	PH Sensor	Moisture Sensor	Gas Sensor	Value	Result
1	Water	Yes	No	No	6.7	Consumable
2	Meat	No	Yes	No	76	Consumable
3	Milk	Yes	No	No	5.7	Not Consumable
4	Fruits	No	No	Yes	26	Consumable
5	Cheese	Yes	No	No	6.3	Not Consumable

Figure 7. Dataset consumability status of various items. The dataset can be downloaded in CSV or Excel format.

for future predictive modeling of food freshness status.

5.2 Discussion

The Safe for Health system demonstrates the potential of the proposed sensor suite in enhancing food safety and reducing food waste in households. While the system holds promise, a deeper analysis and interpretation of the results, as well as an exploration of the potential limitations and future directions, are essential to provide a more comprehensive understanding of its implications. The sensor-based evaluation of food freshness yielded noteworthy outcomes. As shown in Table 1, the system correctly classified 12 food samples across three categories—dairy, meat, and fruits—using pH, moisture, and ethanol gas readings respectively. Notably, spoiled samples such as milk at pH 5.7 and beef at a moisture reading of 67 were correctly identified as not consumable, demonstrating the system's ability to detect category-specific spoilage indicators. These results suggest that sensor-derived threshold comparisons can provide objective freshness assessments previously unavailable at the point of purchase, thereby supporting more informed consumer decision-making and reducing the potential for inadvertent consumption of spoiled food. These findings underscore the critical role of accessible sensing technology in safeguarding public health. The implications of these results are significant. By reducing the incidence of foodborne illnesses and encouraging healthier food choices, the "Safe for Health" system aligns with public health objectives. It not only enhances food safety but also has the potential to alleviate the burden on healthcare systems by reducing the number of food-related illnesses.

The demonstrated ability to classify freshness across multiple food categories highlights the system's potential impact on consumer behaviour. This technology can catalyze healthier dietary habits, contributing to overall well-being. Moreover, it fosters

transparency in the food supply chain, reinforcing trust between consumers and food producers/retailers.

6 Conclusion

In this paper, we proposed an IoT-based food freshness detection system along with a mobile app that successfully addresses limitations in traditional methods through an integrated sensor suite—comprising electrochemical pH and moisture sensors and a semiconductor ethanol gas sensor—paired with mobile technology. The system provides real-time food quality assessment for perishable items while establishing valuable degradation thresholds that contribute to broader food safety research. By enabling data-driven decisions about food consumption, the technology helps reduce household waste and promotes healthier eating habits. In the future, we aim to expand the range of detectable food items and improve sensor sensitivity. The collected sensor dataset will be used to train supervised machine learning models, including Random Forest, Support Vector Machines (SVM), and Gradient Boosting Machines (GBM), which are well-suited for handling nonlinear patterns in pH, moisture, and gas concentration data. For larger datasets, deep learning architectures such as Multilayer Perceptrons (MLPs) or Recurrent Neural Networks (RNNs) will be explored to capture temporal degradation trends and enable early spoilage detection. Additionally, we will investigate deep learning-based attention mechanisms for uncertainty-aware freshness prediction, and pursue integration with smart kitchen ecosystems to further enhance consumer food safety management.

Data Availability Statement

Data will be made available on request.

Funding

This work was supported without any funding.

Conflicts of Interest

The authors declare no conflicts of interest.

Ethical Approval and Consent to Participate

Not applicable.

References

[1] Wang, D., Zhang, M., Jiang, Q., & Mujumdar, A. S. (2024). Intelligent system/equipment for quality deterioration detection of fresh food: Recent advances and application. *Foods, 13*(11), 1662. [CrossRef]

[2] Damdam, A. N., Ozay, L. O., Ozcan, C. K., Alzahrani, A., Helabi, R., & Salama, K. N. (2023). IoT-enabled electronic nose system for beef quality monitoring and spoilage detection. *Foods, 12*(11), 2227. [CrossRef]

[3] Neethirajan, S., Ragavan, V., Weng, X., & Chand, R. (2018). Biosensors for sustainable food engineering: challenges and perspectives. *Biosensors, 8*(1), 23. [CrossRef]

[4] Karanth, S., Feng, S., Patra, D., & Pradhan, A. K. (2023). Linking microbial contamination to food spoilage and food waste: The role of smart packaging, spoilage risk assessments, and date labeling. *Frontiers in microbiology, 14*, 1198124. [CrossRef]

[5] Akinsemolu, A. A., & Onyeaka, H. N. (2024). Microorganisms associated with food spoilage and foodborne diseases. In *Food Safety and Quality in the Global South* (pp. 489-531). Springer. [CrossRef]

[6] Shen, D., Zhang, M., Mujumdar, A. S., & Ma, Y. (2024). Consumer-oriented smart dynamic detection of fresh food quality: Recent advances and future prospects. *Critical Reviews in Food Science and Nutrition, 64*(30), 11281-11301. [CrossRef]

[7] Bendre, S., Shinde, K., Kale, N., & Gilda, S. (2022). Artificial intelligence in food industry: A current panorama. *Asian Journal of Pharmacy and Technology, 12*(3), 242-250. [CrossRef]

[8] Kuswandi, B., Wicaksono, Y., Jayus, Abdullah, A., Heng, L. Y., & Ahmad, M. (2011). Smart packaging: sensors for monitoring of food quality and safety. *Sensing and instrumentation for food quality and safety, 5*(3), 137-146. [CrossRef]

[9] Inês, A., & Cosme, F. (2025). Biosensors for detecting food contaminants—An overview. *Processes, 13*(2), 380. [CrossRef]

[10] Chen, Y., Wang, Y., Zhang, Y., Wang, X., Zhang, C., & Cheng, N. (2024). Intelligent biosensors promise smarter solutions in Food Safety 4.0. *Foods, 13*(2), 235. [CrossRef]

[11] Pallavi, L., Prasad, P., Hariharan, G., Karthikayani, K., & Shudapreyaa, R. (2022). IoT and mobile app-based food spoilage alert system. *International Journal of Health Sciences, 6*, 13911-13924. [CrossRef]

[12] Nath, S. (2024). Advancements in food quality monitoring: Integrating biosensors for precision detection. *Sustainable Food Technology, 2*, 112-125. [CrossRef]

[13] Konfo, T. R. C., Tchekessi, C. K. C., & Baba-Moussa, F. A. K. (2024). Status report on innovations and applications of smart bio-systems for real-time monitoring of food quality. *Applied Food Research, 5*, 100546. [CrossRef]

[14] Chun, M., Yu, H. J., & Jung, H. (2024). A deep learning-based rotten food recognition app for older

adults: Development and usability study. *JMIR Formative Research, 8*, e55342. [CrossRef]

[15] Stephan, T., Paramana, P. P. D., Lin, C. C., Agarwal, S., & Verma, R. (2025). Federated learning-driven IoT system for automated freshness monitoring in resource-constrained vending carts. *Journal of Big Data, 12*(1), 1-34. [CrossRef]

[16] Doğan, V., Evliya, M., Kahyaoglu, L. N., & Kılıç, V. (2024). On-site colorimetric food spoilage monitoring with smartphone embedded machine learning. *Talanta, 266*, 125021. [CrossRef]

[17] Erna, K. H., Rovina, K., & Mantihal, S. (2021). Current detection techniques for monitoring the freshness of meat-based products: A review. *Journal of Packaging Technology and Research, 5*(3), 127-141. [CrossRef]

[18] Liu, Y., Han, W., Zhang, Y., Li, L., Wang, J., & Zheng, L. (2016). An Internet-of-Things solution for food safety and quality control: A pilot project in China. *Journal of Industrial Information Integration, 3*, 1-7. [CrossRef]

[19] Ren, Q. S., Fang, K., Yang, X. T., & Han, J. W. (2022). Ensuring the quality of meat in cold chain logistics: A comprehensive review. *Trends in Food Science & Technology, 119*, 133-151. [CrossRef]

[20] Naik, A., Lee, H. S., Herrington, J., Barandun, G., Flock, G., Güder, F., & Gonzalez-Macia, L. (2024). Smart Packaging with Disposable NFC-enabled Wireless Gas Sensors for Monitoring Food Spoilage. *ACS sensors, 9*(12), 6789-6799. [CrossRef]

[21] Mounica, B., Ch, G., Vishnu, K., & Kumar, I. (2020). IoT based food spoilage detection system using Arduino. *International Journal of Engineering Technology and Management Sciences, 6*(04), 110-116. [CrossRef]

[22] Mishra, N., Jain, S. K., Agrawal, N., Jain, N. K., Wadhawan, N., & Panwar, N. L. (2023). Development of drying system by using internet of things for food quality monitoring and controlling. *Energy Nexus, 11*, 100219. [CrossRef]

[23] Badamasi, Y. A. (2014, September). The working principle of an Arduino. In *2014 11th international conference on electronics, computer and computation (ICECCO)* (pp. 1-4). IEEE. [CrossRef]

[24] Zhou, G. H., Xu, X. L., & Liu, Y. (2010). Preservation technologies for fresh meat—A review. *Meat Science, 86*(1), 119-128. [CrossRef]

[25] Papadopoulou, O. S., Panagou, E. Z., Mohareb, F. R., & Nychas, G. J. E. (2013). Sensory and microbiological quality assessment of beef fillets using a portable electronic nose in tandem with support vector machine analysis. *Food Research International, 50*(1), 241-249. [CrossRef]

[26] Misra, N. N., Dixit, Y., Al-Mallahi, A., Bhullar, M. S., Upadhyay, R., & Martynenko, A. (2020). IoT, big data, and artificial intelligence in agriculture and food industry. *IEEE Internet of things Journal, 9*(9), 6305-6324. [CrossRef]

[27] Swathi, B., Pooja, T., Shankar, Y., & Gowtham, V. (2022, March). Survey on IoT based farm freshness mobile application. In *2022 International Conference on Advanced Computing Technologies and Applications (ICACTA)* (pp. 1-7). IEEE. [CrossRef]

Mazhar Iqbal is currently pursuing a Master's degree in Information Systems Engineering at the Graduate School of Information Science and Technology, The University of Osaka, Japan. His expertise includes mobile application development, with a research focus on Artificial intelligence (AI), computer vision, 3D vision, and the Internet of Things (IoT). His work is driven by a passion for creating transformative technologies that address real-world challenges, seamlessly merging cutting-edge research with practical, scalable solutions. (Email: mazharicp786@gmail.com)

Junaid Yousaf is currently pursuing a Master's degree in Computer Science from Ghulam Ishaq Khan Institute (GIKI), Pakistan. His research interests include Natural Language Processing (NLP), Computer Vision, Sentiment Analysis, and Artificial Intelligence applications. His work focuses on advancing computational techniques to solve real-world problems, with a particular emphasis on bridging the gap between theoretical research and practical implementations. (Email: Junaidyousaf432@gmail.com)

Atif Khan received his M.Sc. in Computer Science from the University of Peshawar, Pakistan, in 2004, and his Ph.D. in Computer Science (Text Mining) from Universiti Teknologi Malaysia (UTM), Malaysia, in 2016. Since 2016, he has been an Assistant Professor at Islamia College Peshawar, Pakistan. His research focuses on data mining, text mining, sentiment analysis, opinion mining, recommender systems, IoT and machine learning. He is a technical committee member for several international conferences and received the Best Student Award and Pro-Chancellor Award from UTM for his contributions to text mining. He serves as an Associate Editor for ACM Transactions on Asian and Low-Resource Language Information Processing and reviews for various international conferences and journals. (Email: atifkhan@icp.edu.pk)

Tila Muhammad received a B.S. degree in Software Engineering from Islamia College University Peshawar, Pakistan. His research interests include Natural Language Processing, Machine Learning, Text Summarization, Sentiment Analysis, Hate Speech Detection and Artificial Intelligence applications in low-resource languages. His work focuses on advancing NLP techniques for underrepresented languages and bridging the gap between computational linguistics and real-world applications. (Email: tm.913.se.icup@gmail.com)