



YOLOv8-Lite: A Lightweight Object Detection Model for Real-time Autonomous Driving Systems

Ming Yang^{1,*} and Xiangyu Fan¹

¹ College of Architecture and Design, Tongmyong University, Busan 608-711, Republic of Korea

Abstract

With the rapid development of autonomous driving technology, the demand for real-time and efficient object detection systems has been increasing to ensure vehicles can accurately perceive and respond to the surrounding environment. Traditional object detection models often suffer from issues such as large parameter sizes and high computational resource consumption, limiting their applicability on edge devices. To address this issue, we propose a lightweight object detection model called YOLOv8-Lite, based on the YOLOv8 framework, and improved through various enhancements including the adoption of the FastDet structure, TFPN pyramid structure, and CBAM attention mechanism. These improvements effectively enhance the performance and efficiency of the model. Experimental results demonstrate significant performance improvements of our model on the NEXET and KITTI datasets. Compared to traditional methods, our model exhibits higher accuracy and robustness in object detection tasks, better addressing the challenges in fields such as autonomous driving, and contributing to the advancement of intelligent transportation systems.

Keywords: autonomous driving, object detection, YOLOv8, real-time performance, intelligent transportation.

1 Introduction

Autonomous driving technology, as a significant breakthrough in today's technological realm, is leading us into a new era of transportation [1]. However, as its development delves deeper, we are gradually becoming aware of the myriad challenges and hurdles that autonomous driving faces. In practical applications, autonomous driving systems must navigate through various complex traffic scenarios and situations, including road conditions, weather conditions, traffic signals, and the behavior of other road users. The complexity of these factors sometimes makes it difficult for autonomous driving systems to make correct decisions, thus sparking concerns about their safety and reliability [2, 3]. Among the plethora of autonomous driving technologies, object detection serves as a crucial component, playing a pivotal role. Object detection systems perceive objects and obstacles in the surrounding environment, providing real-time environmental information and data to autonomous vehicles. Accurately and efficiently detecting and identifying various objects on the road, such as vehicles, pedestrians, and bicycles, is paramount for ensuring the safety and stability of autonomous driving systems. Therefore, research and improvement



Submitted: 17 December 2023

Accepted: 02 April 2024

Published: 07 April 2024

Vol. 1, No. 1, 2024.

10.62762/TETAI.2024.894227

*Corresponding author:

✉ Ming Yang

yangming1995414@gmail.com

Citation

Yang, M., & Fan, X. (2024). YOLOv8-Lite: A Lightweight Object Detection Model for Real-time Autonomous Driving Systems. *ICCK Transactions on Emerging Topics in Artificial Intelligence*, 1(1), 1–16.



© 2024 by the Authors. Published by Institute of Central Computation and Knowledge. This is an open access article under the CC BY license (<https://creativecommons.org/licenses/by/4.0/>).

in object detection technology have become one of the crucial directions in the development of autonomous driving technology [4, 5].

In recent years, with the continuous development of autonomous driving technology, various algorithms have flourished in the field of object detection to meet the demand for precise and efficient object recognition in autonomous driving systems. Firstly, the Yolo series of algorithms is one of the classic representatives in the field of object detection. The Yolo (You Only Look Once) algorithm [6] is renowned for its high speed and concise network structure, capable of detecting and classifying multiple objects in an image in a single forward pass. Its model employs convolutional neural networks (CNNs) for feature extraction and utilizes fully connected layers for object detection. The importance of multi-scale feature representations in object detection has been further confirmed by path aggregation networks that fuse features across multiple levels in a bottom-up manner, achieving significant improvements in instance-level detection accuracy [7]. However, due to the issue of inaccurate localization when dealing with small objects and dense scenes, the Yolo algorithm may exhibit lower detection accuracy in certain situations. Secondly, the Faster R-CNN algorithm is another commonly used object detection algorithm [8]. This algorithm extracts candidate object regions by introducing a Region Proposal Network (RPN), followed by object detection and classification through ROI pooling layers and fully connected layers. Faster R-CNN improves detection accuracy compared to the Yolo algorithm but suffers from a complex network structure and relatively slow speed due to its large computational overhead. Additionally, the SSD (Single Shot MultiBox Detector) algorithm predicts object locations and categories simultaneously on feature maps of different scales [9], achieving object detection in a single forward pass. With a simple model structure and fast detection speed, the SSD algorithm is suitable for real-time applications. However, there is still room for improvement in small object detection and object localization accuracy with the SSD algorithm.

Lastly, the Mask R-CNN algorithm extends object detection into the realm of semantic segmentation. Building upon Faster R-CNN, this algorithm introduces additional segmentation branches to generate precise object boundaries [8]; further studies have shown that cascading detection stages with progressively stricter IoU thresholds can substantially improve localization quality and

detection accuracy [10]. While Mask R-CNN [11] extends the two-stage detection paradigm by adding parallel prediction branches that substantially increase representational power, its higher computational cost and complex multi-task training procedure make it ill-suited for latency-sensitive applications such as autonomous driving, motivating the pursuit of lighter and faster detection architectures.

The deployment of vehicle detection models also encounters certain challenges. High-precision models often have large-scale architectures, making them difficult to deploy. In response to deployment constraints on embedded systems and edge devices, lightweight designs such as MobileNets [12] and scalable compound-scaling frameworks such as EfficientDet [13] have been proposed to reduce model complexity while preserving accuracy; however, satisfying the strict latency and memory requirements of autonomous driving edge hardware simultaneously remains a non-trivial challenge. In past research, we have observed a lack of balance between accuracy, speed, and the number of parameters in previous works. Some models may prioritize achieving high accuracy but perform poorly in terms of speed and deployment, while others may have advantages in speed but fall short in accuracy. Therefore, methods such as RefineDet++ [14] have made notable progress by incorporating multi-stage single-shot refinement to jointly improve detection accuracy and inference efficiency; nevertheless, achieving an optimal balance among accuracy, speed, and compact parameter count for edge-device deployment remains a persistent and unresolved challenge. The key to addressing this challenge lies in effective model design and optimization. We can reduce the model's scale and inference costs by exploring lightweight network architectures, quantization methods, and model compression techniques. Additionally, optimizing algorithms and leveraging hardware acceleration can improve the model's inference speed to meet real-time requirements. By considering accuracy, speed, and the number of parameters comprehensively, we can better balance the performance of vehicle detection models and achieve their effective deployment and application in various practical scenarios [15, 16].

In response to the existing challenges, we propose the YOLOv8-Lite solution aimed at enhancing the model's inference speed and reducing its complexity by introducing the lightweight network, FastDet. Additionally, we incorporate the CBAM (Convolutional Block Attention Module)

attention mechanism to enhance feature extraction. YOLOv8-Lite is dedicated to addressing the balance between accuracy and efficiency in vehicle detection models, focusing on lightweight architectures and attention-based feature enhancement. Through the design of the FastDet backbone network, we streamline computations while maintaining high detection performance. The integration of the CBAM attention mechanism allows the model to capture richer feature information, thereby improving its ability to accurately detect vehicles in various scenarios. The introduction of this approach represents a significant advancement in achieving a better balance between accuracy, speed, and complexity in vehicle detection models, offering improved feasibility for deployment on resource-constrained devices and enhancing performance in real-world applications.

Here we introduce the three contributions of this paper:

- The introduction of the YOLOv8-Lite framework addresses the challenges faced by vehicle detection models by incorporating the lightweight backbone network, FastDet. This framework aims to improve model inference speed and reduce complexity while prioritizing efficiency without compromising accuracy, providing a practical solution for real-time vehicle detection applications.
- The integration of the Convolutional Block Attention Module (CBAM) attention mechanism into the feature extraction process further enhances the performance of the YOLOv8-Lite framework. By selectively focusing on informative features, the CBAM attention mechanism improves the model's ability to capture relevant information, thereby achieving more precise vehicle detection across various environmental conditions and scenarios.
- This model is more suitable for deployment on resource-constrained devices such as embedded systems or edge devices, expanding its applicability and effectiveness in real-world scenarios.

2 Related Works

2.1 The application of two-stage object detection algorithms in autonomous driving

The application of two-stage object detection algorithms in autonomous driving is a crucial

component of the development of autonomous driving technology [17]. Fast R-CNN-based approaches have demonstrated strong vehicle detection capability across diverse environmental conditions [18, 21], validating the effectiveness of end-to-end training via Region of Interest (RoI) pooling in real-world driving scenarios. Despite achieving improved accuracy and speed over earlier R-CNN variants, such methods remain constrained by the computational overhead of region proposal generation, which limits their applicability in latency-sensitive deployments. Next is Faster R-CNN, which enhances inference speed and efficiency by introducing the Region Proposal Network (RPN) to share convolutional features, yet it still relies on selective search algorithms for region proposal generation, limiting its speed. Further, HyperNet improves localization accuracy by directly predicting bounding box parameters from shared feature maps, effectively handling objects of various scales and aspect ratios, but may increase complexity and computational cost. Mask R-CNN extends Faster R-CNN by adding parallel mask prediction branches, achieving instance segmentation and accurate object localization, albeit at a higher computational cost due to additional mask prediction tasks. Pedestrian FPN (PFN) is specifically designed for pedestrian detection in autonomous driving scenarios, utilizing Feature Pyramid Networks (FPN) to effectively handle pedestrians of various scales and orientations, although it may lead to longer inference times. Cascade architectures with adaptive feature fusion can improve detection accuracy by iteratively refining bounding box predictions across multiple stages; however, this comes at the cost of longer inference times — a drawback also observed in Fast R-CNN-based vehicle detection pipelines deployed under varied real-world conditions [18, 21].

In summary, these two-stage object detection algorithms strike a balance between accuracy and speed in autonomous driving, optimizing object localization and instance segmentation, yet they may incur higher computational costs and longer inference times. The selection of suitable algorithms depends on the specific requirements of the autonomous driving system; for instance, traffic sign detection in autonomous driving has benefited from advances in both two-stage and single-stage paradigms, with recent evaluations demonstrating that modern detectors such as YOLOv8 can achieve competitive accuracy under real-world driving conditions [19].

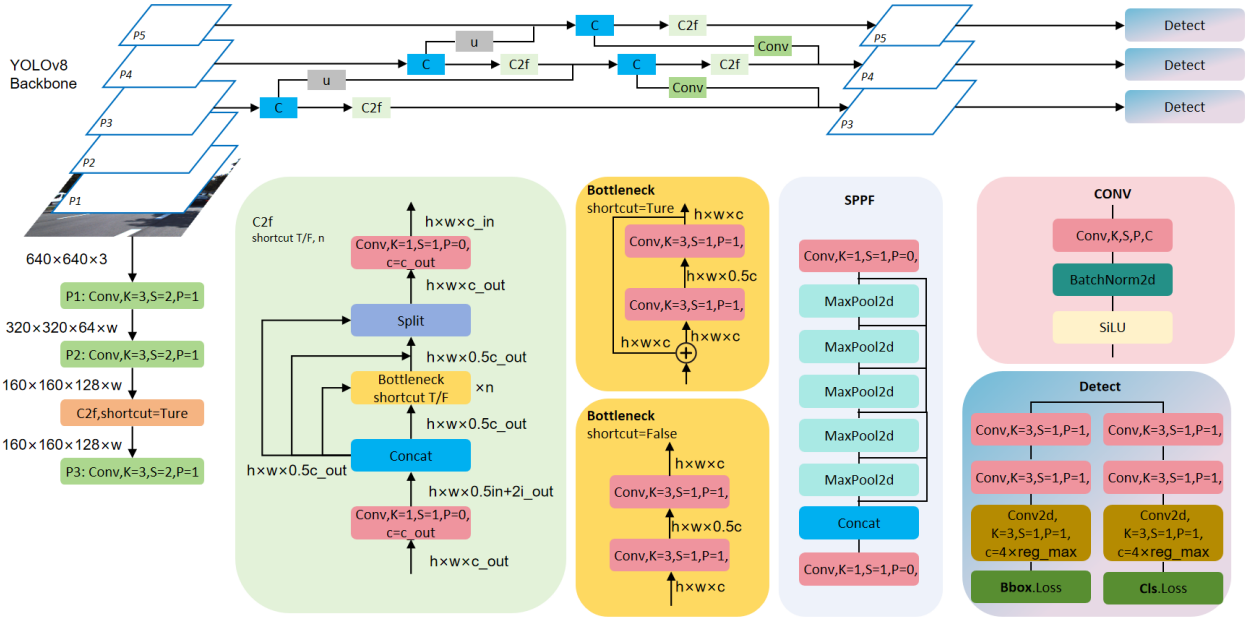


Figure 1. Schematic representation of the YOLOv8 network architecture. The modular design enables adaptation to diverse real-time detection tasks, as demonstrated in smart city applications [32].

2.2 The application of one-stage object detection algorithms in autonomous driving

In the field of autonomous driving, the application of one-stage object detection algorithms has garnered widespread attention. The YOLO series, exemplified by YOLOv3 [20], adopts multi-scale detection heads and cross-layer feature fusion, making it a representative foundation for subsequent lightweight one-stage detectors deployed in autonomous driving scenarios. Anchor-free object detection algorithms have also attracted researchers' interest. These algorithms eliminate the need for predefined anchor boxes by directly predicting object locations from feature maps, simplifying the detection pipeline compared with traditional anchor-based methods. FCOS is a representative example that performs fully convolutional one-stage detection with strong performance across various scales [31]. However, anchor-free detectors may still face challenges in handling dense scenes and objects with large aspect ratio variation. Furthermore, the evolution of algorithms from YOLOv5 to YOLOv8 has also been notable. YOLOv5 introduced a lightweight object detection framework that achieved faster inference speed and higher accuracy through improvements in backbone networks and feature extraction methods. YOLOv8 further optimized network structures and training strategies, enhancing detection performance and robustness.

algorithm that addresses class imbalance issues by introducing focal loss but suffers from slower inference speeds. Similarly, SSD, known for its simple and efficient design, holds a significant position in the object detection domain; however, its performance diminishes when detecting small objects or objects with different aspect ratios. In summary, these algorithms have their own strengths and weaknesses in terms of detection performance, speed, and applicability, thus requiring comprehensive consideration based on specific application requirements and scene constraints when selecting the appropriate algorithm [21].

3 Methodology

3.1 YOLOv8 Network

YOLOv8 is the latest advancement in the You Only Look Once (YOLO) series, boasting outstanding performance and innovative design. Its effectiveness has been validated across diverse detection scenarios, including real-time detection of fast-moving objects such as flying targets, demonstrating strong generalization capability [22]. This model enhances the accuracy and efficiency of object detection by introducing a series of new techniques and optimizations. The network architecture of YOLOv8 is illustrated in Figure 1.

The improvements in YOLOv8 can be attributed to several aspects:

- YOLOv8 draws inspiration from the design

philosophy of YOLOv7 ELAN for its backbone network and Neck part. It replaces the C3 structure of YOLOv5 with a richer C2f structure and fine-tunes different channel numbers for models of different scales. These refinements and optimizations significantly enhance the model's performance and make it more suitable for various complex scenarios.

- Compared to YOLOv5, YOLOv8 introduces significant changes to its Head part. It adopts the mainstream decoupled head structure, separating classification and detection heads. Additionally, it transitions from an Anchor-Based approach to an Anchor-Free approach, further improving the model's detection accuracy and robustness.
- To better optimize the model's performance, we employ the TaskAlignedAssigner positive sample allocation strategy and introduce Distribution Focal Loss. These new loss computation schemes effectively enhance the model's training stability and convergence speed, further boosting its performance.

Through these innovative designs and optimization strategies, YOLOv8 has made significant advancements in the field of object detection, providing more reliable and efficient solutions for applications such as autonomous driving.

3.2 YOLOv8-Lite

Our overall network architecture takes into account the computational resource constraints of devices in scenarios such as autonomous driving. Therefore, we opted for a lightweight network model called YOLOv8-Lite. As shown in Figure 2, YOLOv8-Lite is based on the YOLOv8 framework and achieves efficient object detection through simplified design and optimized computation. Recognizing the demands for real-time performance and efficiency, we avoided large network structures like CSPDarkNet53 and instead adopted our proposed FastDet structure, which simplifies network complexity and is better suited to the computational resources of edge devices. Additionally, we introduced the TFPN (Top-Down Feature Pyramid Network) pyramid structure to address information loss during feature fusion. The TFPN structure effectively merges feature maps from different levels, enhancing the network's detection capability across different scales while reducing information loss. This pyramid structure design allows for a more comprehensive understanding of

input images, thereby improving object detection accuracy. Furthermore, we introduced the CBAM (Convolutional Block Attention Module) mechanism to further enhance the network's representation capability. The CBAM mechanism adaptively adjusts attention within feature maps, enabling the network to focus more accurately on important target areas, thereby improving object detection performance. The introduction of this mechanism enhances the network's robustness in handling complex scenarios and occlusions, making it more suitable for practical applications such as autonomous driving.

3.3 CBAM

In the field of deep learning, attention mechanisms play a crucial role in allowing models to focus on relevant information while filtering out irrelevant details. This concept was broadly established through the success of self-attention in sequence modeling, where selectively weighting different parts of the input was shown to dramatically improve representation quality [23]. In convolutional networks, similar selective weighting principles are applied along channel and spatial dimensions to enhance feature discrimination. CBAM (Convolutional Block Attention Module) is a popular attention mechanism designed to enhance feature representations in deep neural networks. It consists of two complementary sub-modules: the Channel Attention Module (CAM) and the Spatial Attention Module (SAM). CAM recalibrates feature maps across channels to emphasize informative features, while SAM recalibrates feature maps spatially to capture contextual information. We introduced the CBAM attention module into the Feature Pyramid Network (FPN) to strengthen the feature extraction network, effectively extracting crucial features from the feature maps and improving the model's accuracy. Specifically, within the FPN architecture, we incorporated 6 ECA attention blocks. These attention blocks dynamically adjust the importance of features across channel and spatial dimensions, enabling the model to focus on relevant regions and enhance performance. The network architecture of the CBAM is depicted in Figure 3.

In the following equations, we introduce the key mathematical formulations of CBAM:

The Channel Attention Map C is computed as the sigmoid activation of the average channel-wise feature

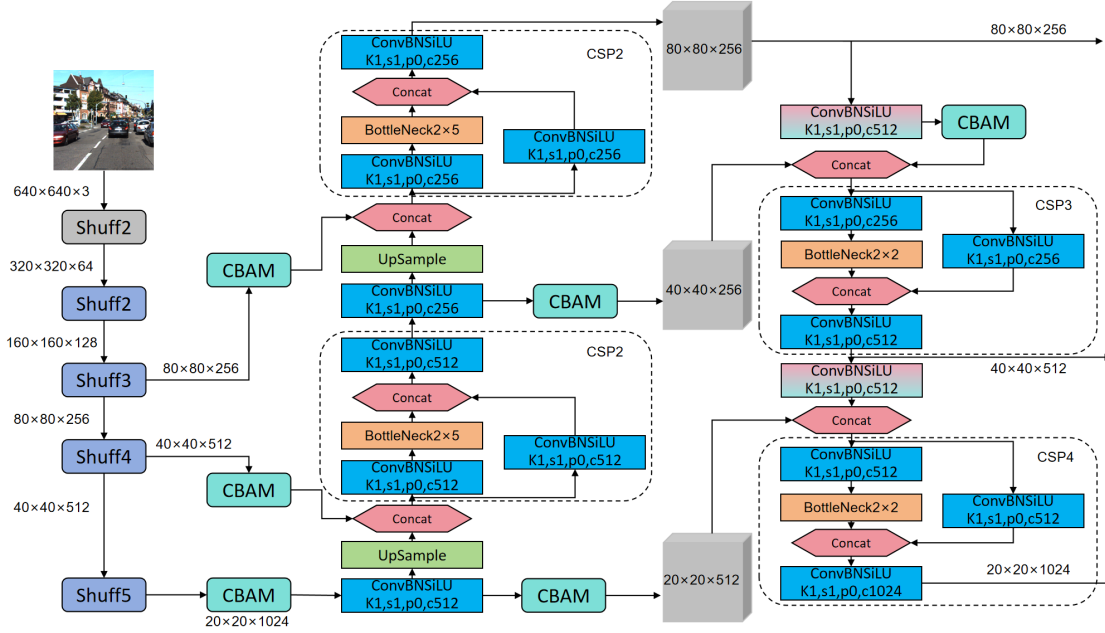


Figure 2. Architectural diagram of YOLOv8-Lite network.

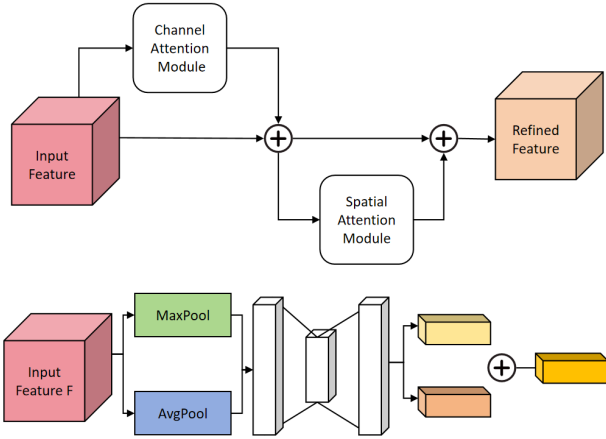


Figure 3. Schematic diagram of CBAM network architecture.

responses.

$$C = \sigma \left(\frac{1}{H \times W} \sum_{i=1}^H \sum_{j=1}^W \text{ReLU}(W_c \cdot X_{i,j}) \right) \quad (1)$$

where C is the channel attention map. H and W are the height and width of the feature map, respectively. $X_{i,j}$ is the feature map at position (i, j) . W_c represents the weights used for channel-wise convolution. σ denotes the sigmoid activation function.

The Spatial Attention Map S is computed similarly, capturing spatial dependencies across the feature map.

$$S = \sigma \left(\frac{1}{C} \sum_{c=1}^C \text{ReLU}(W_s \cdot X_{:, :, c}) \right) \quad (2)$$

where S is the spatial attention map. C is the number of channels in the feature map. $X_{:, :, c}$ represents the c -th channel of the feature map. W_s represents the weights used for spatial-wise convolution.

The Output Feature Map Y is obtained by combining the channel and spatial attention maps element-wise with the original feature map X , enhancing the model's ability to focus on relevant regions.

$$Y = X \odot (C + S) \quad (3)$$

where Y is the output feature map. $\odot$ denotes element-wise multiplication.

The Global Average Pooling operation computes the average value of each channel in the feature map X , providing a global context for the spatial features.

$$\text{GlobalAvgPool}(X) = \frac{1}{H \times W} \sum_{i=1}^H \sum_{j=1}^W X_{i,j} \quad (4)$$

where $\text{GlobalAvgPool}(X)$ represents the global average pooling operation applied to the feature map X .

The Multi-Layer Perceptron (MLP) $\text{MLP}(X)$ is applied to the input feature map X to capture more complex patterns and relationships. Here, W_1 and W_2 represent the weights of the MLP layers.

$$\text{MLP}(X) = \text{ReLU}(W_2 \cdot (\text{ReLU}(W_1 \cdot X) + X)) \quad (5)$$

where $\text{MLP}(X)$ denotes the multi-layer perceptron (MLP) applied to the input feature map X . W_1 and W_2 represent the weights of the MLP layers.

3.4 TFPN

Our TFPN network architecture is uniquely designed for object detection tasks, aiming to fully leverage the information from feature maps at different scales [24]. Firstly, we enhance the output feature maps of Dark3, Dark4, and Dark5 in the backbone network, which contain target information at different scales. Next, we employ a top-down upsampling approach, using bilinear interpolation to resize the feature maps from deeper layers to match the sizes of shallower feature maps, facilitating feature fusion. This method ensures the effective fusion of feature maps at different levels and the comprehensive utilization of the information they carry. Subsequently, we perform bottom-up convolution or pooling operations to gradually downsample the feature maps from shallower to deeper layers, extracting more semantic information. This bidirectional feature extraction process helps the model better understand the semantic content of images, thereby improving the accuracy and robustness of object detection. The network architecture of TFPN is illustrated in Figure 4.

Below, we explain the main mathematical derivation formulas of TFPN:

$$H_l = \text{Upsample}(H_{l+1}) + W_l * H'_l + b_l \quad (6)$$

where H_l is the feature map at level l , H_{l+1} is the feature map at level $l + 1$, W_l is the weight matrix for convolution at level l , H'_l is the feature map after bottom up processing at level l , b_l is the bias term at level l .

$$H'_l = \text{ReLU}(H_l) \quad (7)$$

where $\text{ReLU}(\cdot)$ is the rectified linear unit activation function.

$$W_l = \text{Conv}(H_{l-1}) \quad (8)$$

where W_l is the weight matrix for convolution at level l , H_{l-1} is the feature map at level $l - 1$, $\text{Conv}(\cdot)$ denotes the convolution operation.

$$\text{Upsample}(H_{l+1}) = \text{Bilinear_Interpolation}(H_{l+1}) \quad (9)$$

where $\text{Upsample}(H_{l+1})$ is the upsampled feature map from level $l + 1$, $\text{Bilinear_Interpolation}(\cdot)$ denotes the bilinear interpolation operation.

$$H_1 = \text{Conv_Pooling}(X) \quad (10)$$

where H_1 is the feature map at the first level, X is the input image or feature map, $\text{Conv_Pooling}(\cdot)$ denotes the convolution and pooling operations.

3.5 FastDet

In the CSPDarkNet53 structure, the Dark module serves as a critical feature extraction module designed to extract image features for subsequent tasks. Adopting a deep residual structure, this module utilizes a series of convolutional and pooling layers to extract and abstract features from input images [25]. While the Dark module has been designed with lightweight principles in mind, it may still have some limitations under certain circumstances. For instance, when processing large-scale feature maps, the Dark module may require significant computational resources, resulting in slower inference speeds. Particularly in scenarios where real-time performance is crucial, the performance limitations of the Dark module may restrict the model's applicability. Therefore, despite making progress in lightweight design, further optimization and improvement are still needed to enhance its performance in fast object detection tasks.

We introduce the innovative FastDet structure, designed based on lightweight principles, to improve the inference speed and accuracy of object detection models. This structure begins with a simple 1×1 convolution operation, followed by the Fast module performing channel shuffling, dividing the feature map into two segments along the feature channels. This design enables the model to more efficiently extract and utilize feature information, significantly boosting inference speed while maintaining accuracy. Figure 5 illustrates the structures of Dark and FastDet, where the Dark module consists of multiple convolutional layers and pooling layers, forming a deep residual network for feature extraction. In contrast, the FastDet structure employs a more simplified approach, with a simpler architecture.

Below, we explain the main mathematical derivation formulas of FastDet:

$$\mathbf{Y}_{fc} = \mathbf{W}\mathbf{X} + \mathbf{b} \quad (11)$$

where $\mathbf{Y}$ is the output feature map, $\mathbf{W}$ is the weight matrix, $\mathbf{X}$ is the input feature map, $\mathbf{b}$ is the bias vector.

$$\mathbf{Y}_{sh} = \text{Shuffle}(\mathbf{Y}_{fc}) \quad (12)$$

where $\mathbf{Y}$ is the output feature map after channel shuffling, $\text{Shuffle}(\cdot)$ denotes the channel shuffling operation.

$$\mathbf{Y}_1, \mathbf{Y}_2 = \text{Split}(\mathbf{Y}_{sh}) \quad (13)$$

where $\mathbf{Y}_1$ and $\mathbf{Y}_2$ are the output feature maps split along the channel dimension, $\text{Split}(\cdot)$ denotes the

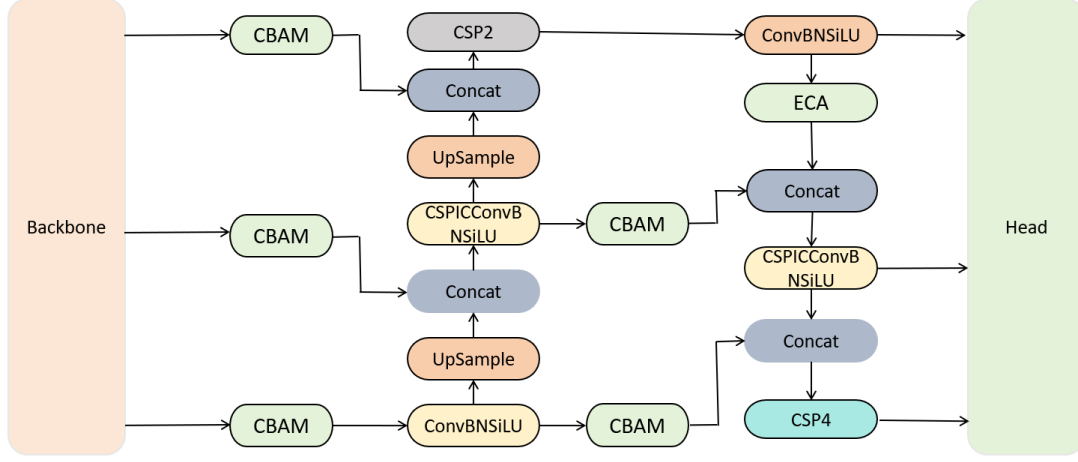


Figure 4. Schematic diagram of TFPN network architecture.

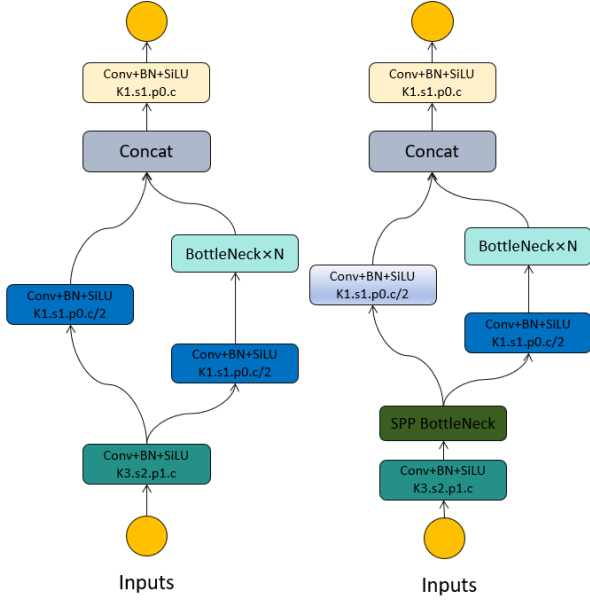


Figure 5. Detailed architectural diagram of the FastDet network.

feature map splitting operation.

$$\mathbf{Y}_{conv} = \text{Conv}(\mathbf{Y}_1) \quad (14)$$

where $\mathbf{Y}$ is the output feature map after convolution, $\text{Conv}(\cdot)$ denotes the convolution operation.

$$\mathbf{Y}_{out} = \text{Concat}(\text{Pooling}(\mathbf{Y}_2), \mathbf{Y}_{conv}) \quad (15)$$

where $\mathbf{Y}_{out}$ is the final output feature map of the FastDet block, and $\text{Concat}(\cdot)$ denotes channel-wise concatenation of the two branches. The FastDet block first applies a 1×1 linear projection, shuffles channels to promote cross-group information exchange, splits the result into two branches, applies convolution to one branch and pooling to the other, and finally concatenates both branches as the output feature map $\mathbf{Y}_{out}$.

4 Experiments

4.1 Dataset

To evaluate the performance of our proposed method in various scenarios, we selected two representative datasets: NEXET and the KITTI dataset.

The NEXET dataset is a large-scale video dataset widely used in the field of autonomous driving. It covers various urban streets [26], highways, and rural roads under different weather conditions and road conditions. The dataset provides high-resolution video clips along with rich annotation information, including bounding boxes and class labels for vehicles. In this study, individual frames are extracted from the video clips and used for image-based object detection evaluation. This makes the NEXET dataset an ideal choice for studying and evaluating object detection algorithms.

The KITTI dataset is a classic benchmark for autonomous driving [27], with extended versions covering comprehensive urban scene understanding across both 2D and 3D modalities [28]. It contains images collected from sensors mounted on vehicles, covering various tasks in urban and suburban road scenes, including object detection, object tracking, and stereo vision. Annotation information in the KITTI dataset includes bounding boxes and class labels for objects such as vehicles, pedestrians, and bicycles. Due to its realistic scenes and rich annotation information, the KITTI dataset is widely used for the development and evaluation of autonomous driving algorithms.

4.2 Experimental Environment

As shown in Table 1, our experimental setup is presented.

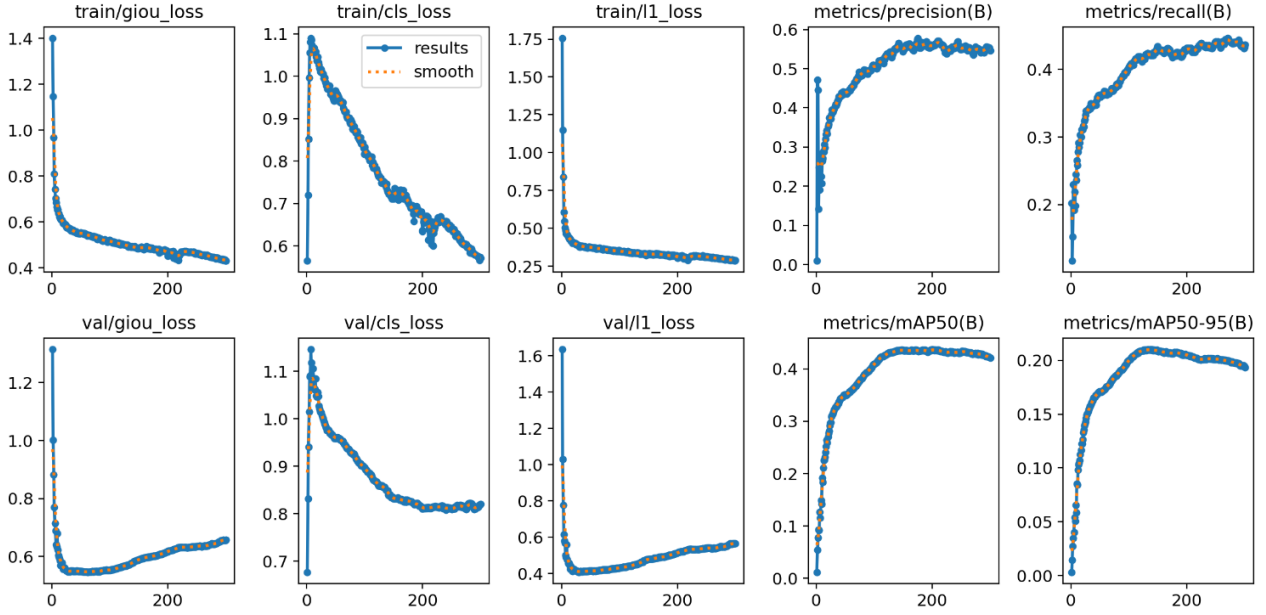


Figure 6. Performance evaluation of the YOLOv8-Lite model.

Table 1. Illustration of the experimental setup.

Parameter	Configuration
CPU	Intel Core i7-12700KF
GPU	NVIDIA GeForce RTX 4090 (24 GB)
CUDA version	CUDA 11.6
Python version	Python 3.9.13
Deep learning framework	Pytorch 2.0.0
Operating system	Ubuntu 22.04.2

4.3 Experimental Details

4.3.1 Data preprocessing

We selected a total of 53,460 images from the NEXET dataset. According to the partition criteria of 70% for training, 20% for validation, and 10% for testing, the training set comprises 37,422 images, the validation set comprises 10,692 images, and the test set comprises 5,346 images. Similarly, we selected 37,586 images from the KITTI dataset, with the training set containing 26,310 images, the validation set containing 7,517 images, and the test set containing 3,759 images. The specific results are shown in Table 2.

Table 2. Dataset division.

Dataset	Training Set	Validation Set	Test Set
NEXET	37422	10692	5346
KITTI	26310	7517	3759

During the data cleaning phase, we first identify and remove outliers and noise from the image data. Next, we assess the quality of the images and eliminate those with poor quality to ensure consistency and reliability of the data. Additionally, we perform

standardization procedures on the images, such as resizing and background removal, to prepare a clean dataset for model training.

To increase the diversity and richness of the dataset, we employed data augmentation techniques to augment the image data. Data augmentation includes operations such as random rotation, flipping, cropping, and brightness adjustment to generate additional training samples, thereby enhancing the model's generalization ability and robustness.

4.3.2 Model training

Our training settings for the YOLOv8-Lite model took into account the practical requirements of the autonomous driving domain. We opted for a lightweight model suitable for edge devices and employed representative parameter configurations during training. As shown in Table 3, the learning rate was set to 0.001, and we utilized the Adam optimizer to enhance convergence speed and accuracy. Given the high real-time demands of autonomous driving tasks, we set the input image size to 640×640 and the batch size to 16 to improve training efficiency. Additionally, to prevent model overfitting, we applied a small weight decay value of 0.001. The training epochs were set to 300 to ensure the model adequately learned the features and patterns within the dataset. Ultimately, our YOLOv8-Lite model, with these parameters, consisted of 4,385,523 parameters and 252 layers, providing an efficient and reliable solution for object detection tasks in the autonomous driving scenario.

Table 3. Model parameter settings.

Parameter	Value
Learning Rate	0.001
Optimizer	Adam
Batch Size	16
Weight Decay	0.001
Training Epochs	300
Model Parameters	4,385,523
Number of Layers	252

During the training process, we closely monitored the changes in various metrics, which are crucial for evaluating model performance and training progress. Figure 6 illustrates the variations in bounding box loss, confidence loss, and class loss. Analyzing these loss curves enables us to gain a clearer understanding of the model's performance during training. Specifically, our model demonstrated outstanding performance, with gradual decreases in bounding box loss, confidence loss, and class loss, indicating a progressive improvement in the accuracy and precision of the model for object detection tasks. Our model can effectively detect objects in images and accurately classify and localize them. This steady improvement validates the effectiveness of our training process and the robustness of the model. Our model exhibited excellent performance on both the NEXET and KITTI datasets, providing a reliable solution for object detection tasks in practical applications such as autonomous driving.

Algorithm 1 shows the training process of our network.

4.3.3 Evaluation Metrics

The experiment adopts the following evaluation metrics to comprehensively assess the model's performance:

Precision: Assesses the ratio of accurately predicted true positive instances among all instances flagged as positive by the model.

$$Precision = \frac{True\ Positives}{True\ Positives + False\ Positives} \quad (16)$$

where *True Positives* are the number of correctly predicted positive instances, and *False Positives* are the number of incorrectly predicted positive instances. Precision measures the proportion of true positive instances among all instances predicted as positive by the model.

Recall: Gauges the ratio of accurately identified true

Algorithm 1 Training YOLOv8-Lite network

Require: Training dataset: NEXET and KITTI

Ensure: Trained YOLOv8-Lite network

```

1: Initialize YOLOv8-Lite network parameters randomly
2: Set learning rate  $\alpha$ , batch size  $B$ , and number of epochs  $E$ 
3: for  $epoch = 1$  to  $E$  do
4:   for  $i = 1$  to  $N/B$  do
5:     Sample a mini-batch of size  $B$  from the training dataset
6:     Forward pass: Compute predicted bounding boxes and confidence scores
7:     Compute loss function  $\mathcal{L}$  using ground truth bounding boxes
8:     Backward pass: Update network parameters using the Adam optimizer
9:   end for
10:  Evaluate precision and mAP@0.5 on the validation set
11:  if Validation mAP@0.5 has improved then
12:    Save current model parameters
13:  end if
14: end for

```

positive instances by the model among all genuine positive instances.

$$Recall = \frac{True\ Positives}{True\ Positives + False\ Negatives} \quad (17)$$

where *True Positives* are the number of correctly predicted positive instances, and *False Negatives* are the number of incorrectly predicted negative instances. Recall measures the proportion of true positive instances correctly identified by the model among all actual positive instances.

F1 Score: Represents the harmonic average of precision and recall, ensuring equilibrium between them.

$$F1\ Score = 2 \times \frac{Precision \times Recall}{Precision + Recall} \quad (18)$$

F1 Score is the harmonic mean of precision and recall, providing a balance between them.

mAP: Represents the average precision scores' mean across all classes or categories, a commonly utilized metric in object detection tasks.

$$mAP = \frac{1}{N} \sum_{i=1}^N AP_i \quad (19)$$

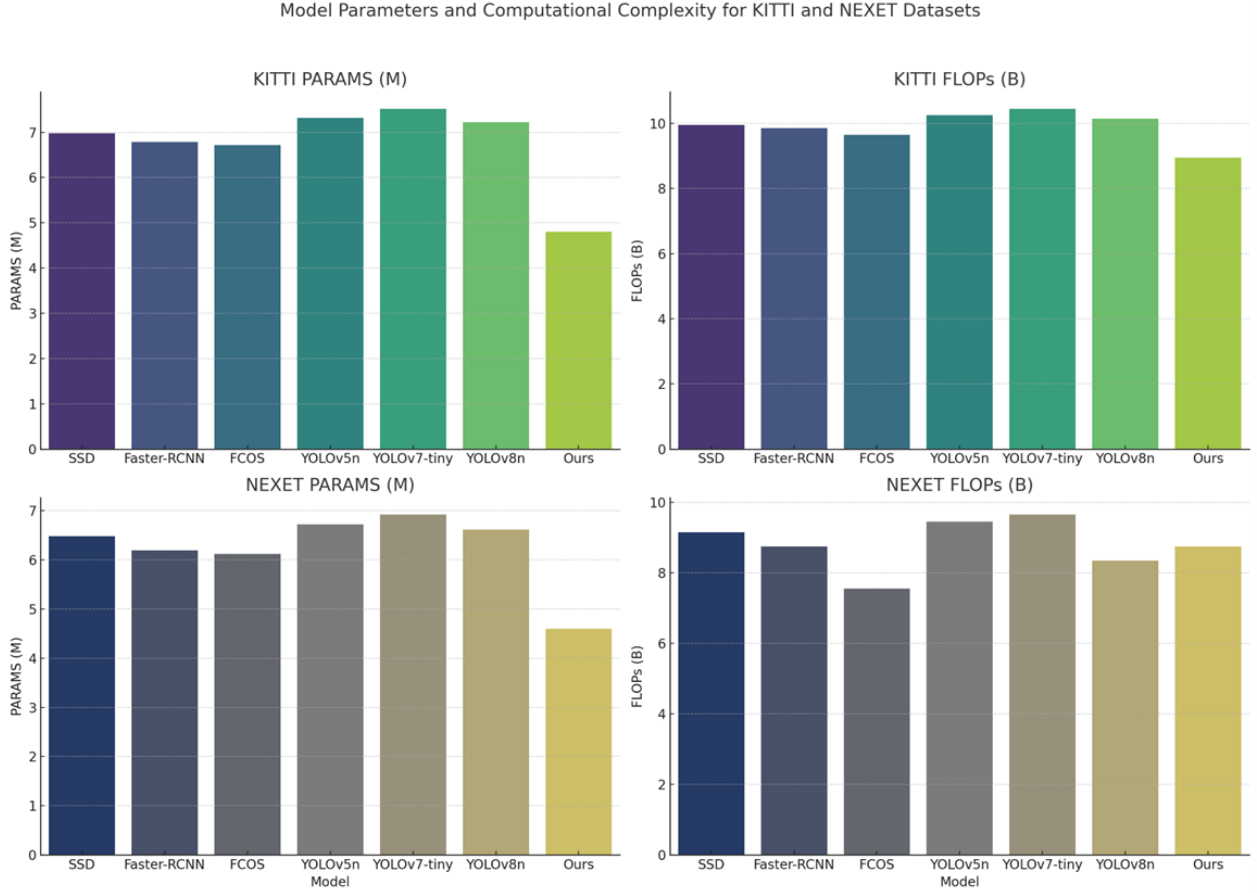


Figure 7. Model parameters and computational complexity for KITTI and NEXET datasets.

Table 4. Comparison of different methods on KITTI and NEXET datasets.

Methods	KITTI				NEXET			
	Precision	F1 Score	mAP@0.5	FPS	Precision	F1 Score	mAP@0.5	FPS
SSD [9]	58.37	54.09	56.29	18	56.19	51.86	53.09	9
Faster-RCNN[8]	64.16	52.07	49.09	20	61.90	51.42	47.88	15
FCOS [31]	71.58	52.62	59.82	21	68.86	49.98	57.63	19
YOLOv5n [29]	66.13	64.56	60.89	42	63.02	61.20	58.67	39
YOLOv7-tiny [30]	67.92	62.62	65.36	62	65.69	59.91	63.16	60
YOLOv8n [19]	70.82	66.63	66.35	57	68.58	64.36	64.22	54
Ours	76.72	74.62	75.32	85	74.52	71.82	73.12	72

where N is the number of classes or categories, and AP_i is the Average Precision for class i . mAP is the mean of the average precision (AP) scores across all classes or categories, commonly used in object detection tasks.

$mAP@[IoU]$: Denotes the average precision means at varying Intersections over Union (IoU) thresholds, assessing the model's effectiveness across diverse IoU requirements.

$$mAP@[IoU] = \frac{1}{N} \sum_{i=1}^N AP@[IoU]_i \quad (20)$$

where $AP@[IoU]_i$ is the Average Precision at the IoU

threshold for class i . $mAP@[IoU]$ is the mean of the average precision at different Intersections over Union (IoU) thresholds, evaluating the model's performance under different IoU requirements.

4.4 Experimental Results and Analysis

In the comparative evaluation, representative YOLO-family baselines are included: a YOLOv5-based lightweight detector evaluated in traffic detection scenarios [29], an improved YOLOv7 architecture applied to small object detection in traffic environments [30], and a YOLOv8 variant whose detection performance under real-world autonomous

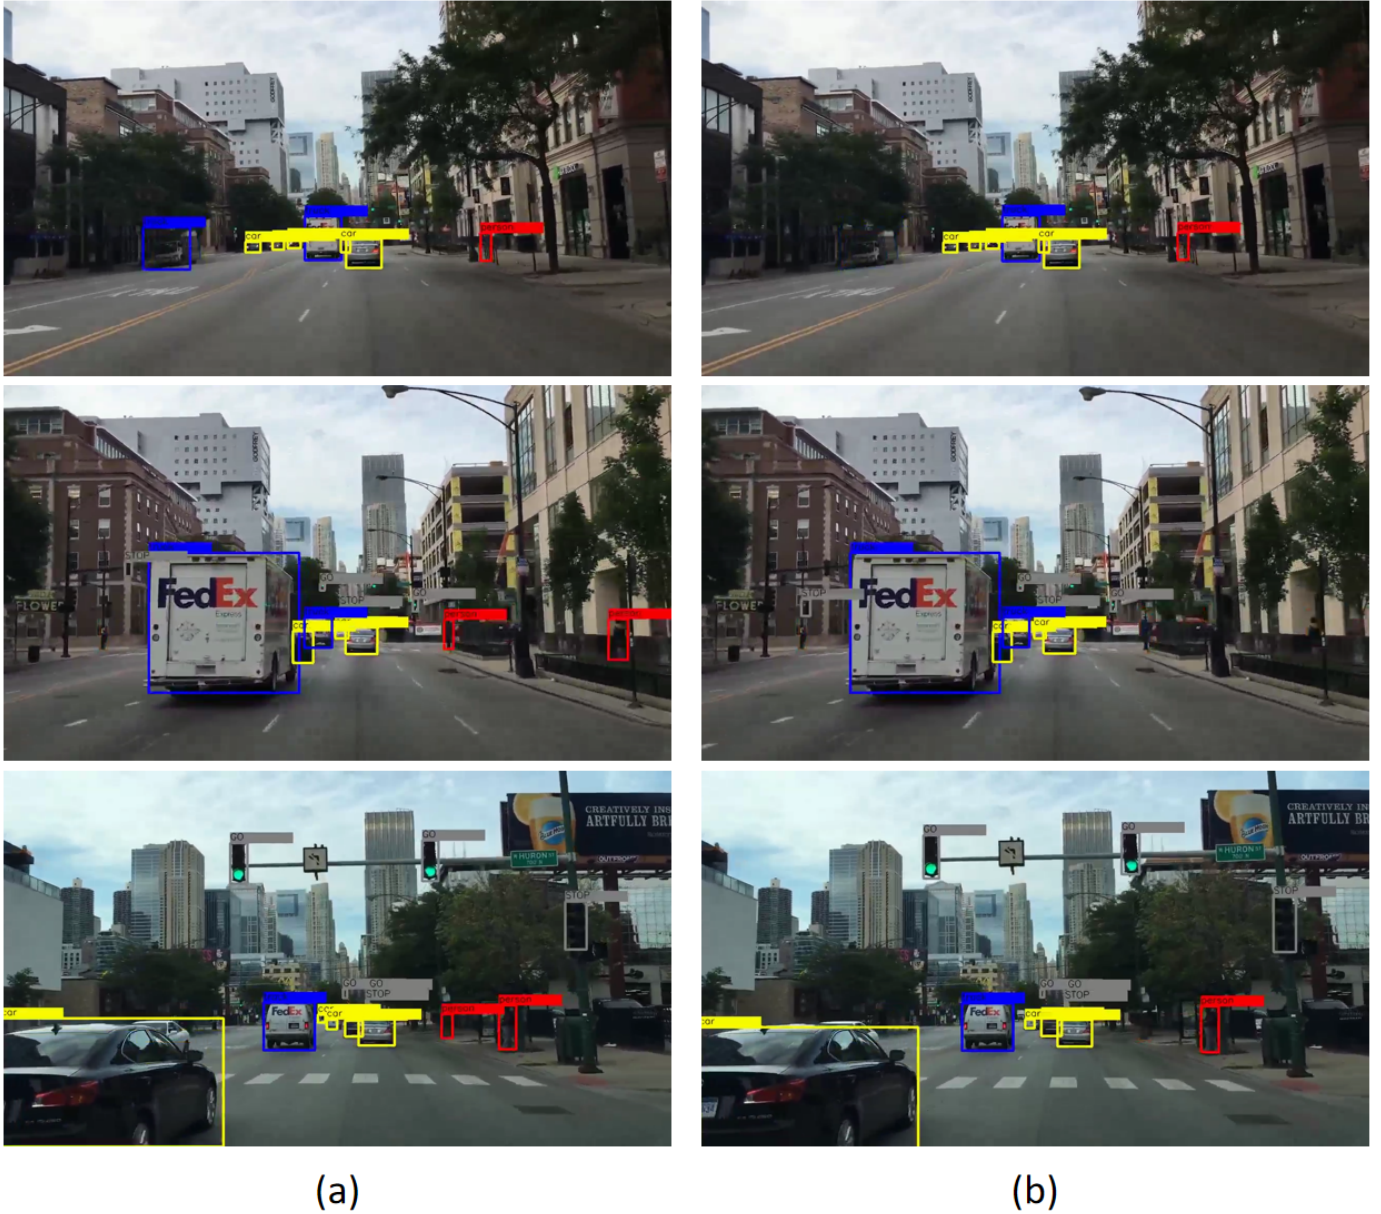


Figure 8. Visualization of detection results. (a) YOLOv8-Lite. (b) YOLOv8.

driving conditions has been systematically assessed [19]. All baselines are re-evaluated on the KITTI and NEXET datasets under identical experimental settings for a fair comparison. The comparative analysis of different methods applied on the KITTI and NEXET datasets, including key performance indicators such as precision, F1 score, mAP@0.5, and frames per second (FPS), is presented in Table 4, providing a comprehensive evaluation of their effectiveness in object detection tasks. In the evaluation on the KITTI dataset, the method proposed in this study performed the best, achieving scores of 76.72% in precision, 74.62% in F1 score, 75.32 in mAP@0.5, and 85 in FPS. These results not only demonstrate its superior accuracy but also

its significant advantage in processing speed. For the NEXET dataset, our method also displayed outstanding performance, specifically achieving a precision of 74.52%, an F1 score of 71.82%, a mAP@0.5 of 73.12, and an FPS of 72. These outcomes further confirm the consistency of our method’s efficiency and accuracy across different testing scenarios. In summary, by adopting the lightweight network model YOLOv8-Lite, we have not only made breakthroughs in accuracy and speed but also ensured the feasibility of the model in practical applications. Particularly in scenarios like autonomous driving, where fast and accurate object detection is required, a high FPS rate means faster response times, which is crucial for safety.

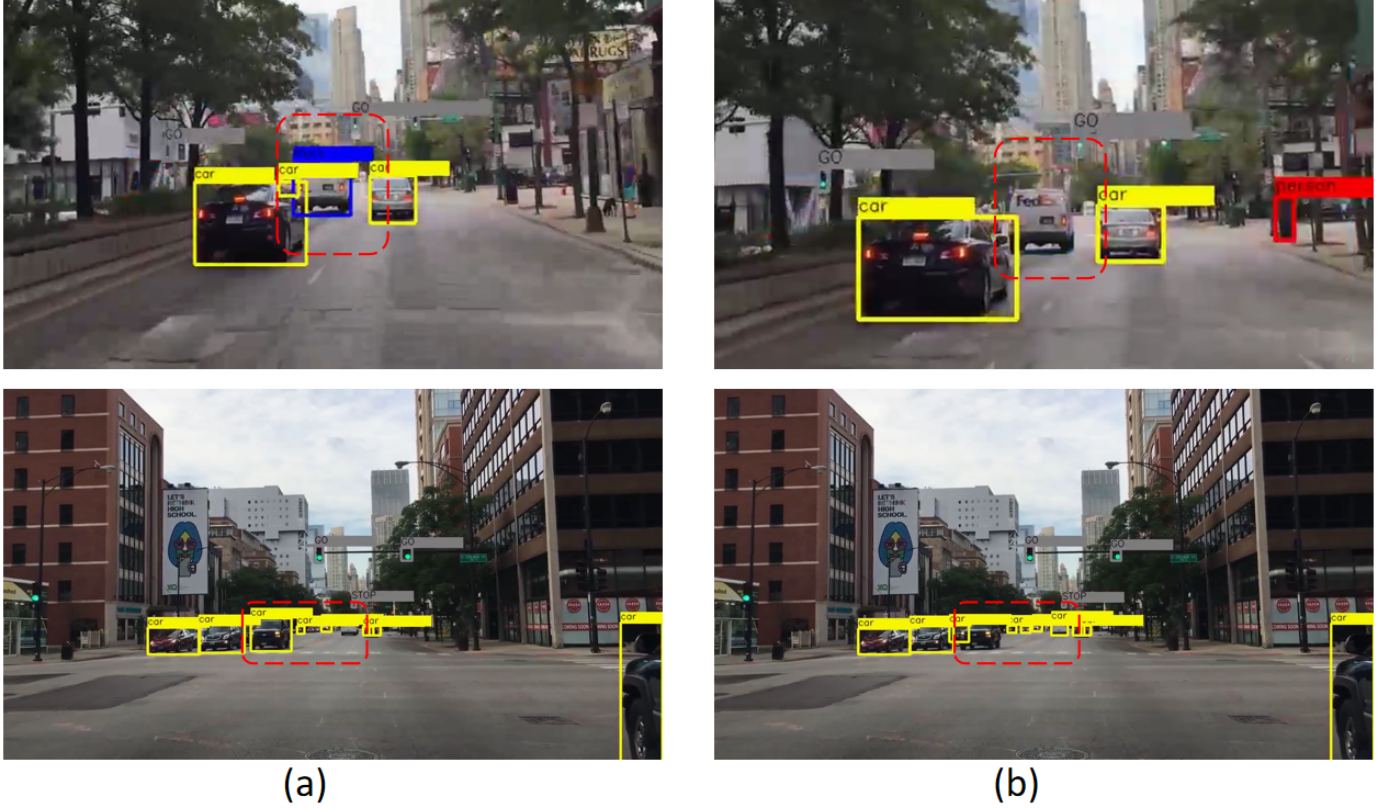


Figure 9. Comprehensive detection analysis. (a) YOLOv8-Lite. (b) YOLOv8.

Table 5 presents a comparison of parameter counts and computational complexity for different models on the KITTI and NEXET datasets. It lists each model’s number of parameters and floating-point operations (FLOPs), revealing that our proposed model demonstrates lower parameters and FLOPs on both datasets, specifically 4.80M/8.95B (KITTI) and 4.60M/8.75B (NEXET). This indicates that our model maintains high efficiency while reducing computational resource consumption. In contrast, other models like SSD, Faster-RCNN, FCOS, YOLOv5n, YOLOv7-tiny, and YOLOv8n show varying degrees of parameter counts and computational complexity. Figure 7 visualizes these comparisons, further highlighting the results and allowing us to see at a glance that our model has found an ideal balance between high-performance object detection and computational resource efficiency. This not only provides an effective solution for areas such as autonomous driving but also offers valuable insights for future efficient computing in resource-constrained environments. It is noted that configuration (3), employing TFPN alone, yields a lower Precision on NEXET (64.61%) compared to the baseline (70.11%). This is attributed to the information imbalance introduced when applying top-down feature fusion without the channel attention recalibration provided

by CBAM, which can suppress discriminative features at certain scales when used in isolation. Similarly, the FPS reduction in configuration (4) relative to (2) is due to the additional computational overhead of FastDet’s channel-shuffling operations without the inference parallelism gains that TFPN enables when all modules operate jointly, as confirmed by the full model (5) achieving the highest FPS of 85.

Table 5. Model parameters and computational complexity for KITTI and NEXET datasets.

Model	KITTI		NEXET	
	PARAMS	FLOPs	PARAMS	FLOPs
SSD	6.98M	9.95B	6.48M	9.15B
Faster-RCNN	6.79M	9.85B	6.19M	8.75B
FCOS	6.72M	9.65B	6.12M	7.55B
YOLOv5n	7.32M	10.25B	6.72M	9.45B
YOLOv7-tiny	7.52M	10.45B	6.92M	9.65B
YOLOv8n	7.22M	10.15B	6.62M	8.35B
Ours	4.80M	8.95B	4.60M	8.75B

4.5 Ablation study

As Table 6 demonstrates, the ablation study results compare the specific impacts of different module combinations on model performance. Through detailed analysis of three core modules—CBAM, TFPN, and FastDet—the experiments reveal their individual and combined effects on precision, F1 score,



Figure 10. Visualization of model limitations.

Table 6. Ablation experiment results on KITTI and NEXET datasets.

Method	Modules			KITTI				NEXET			
	CBAM	TFPN	FastDet	Precision	F1 Score	mAP@0.5	FPS	Precision	F1 Score	mAP@0.5	FPS
(1)				65.31	69.41	69.61	63	70.11	67.21	68.41	51
(2)	✓			66.33	70.01	71.51	70	73.11	67.81	70.31	62
(3)		✓		66.81	70.61	70.91	63	64.61	69.71	69.71	51
(4)	✓		✓	72.01	69.71	71.71	65	71.84	68.51	70.51	52
(5)	✓	✓	✓	76.72	74.62	75.32	85	73.99	71.29	72.59	72

mean Average Precision (mAP@0.5), and frames per second (FPS). The baseline experiment (Experiment 1) did not employ any of the new modules, while subsequent experiments progressively introduced CBAM, TFPN, and FastDet to explore the stepwise improvement in model performance. Ultimately, when all modules were integrated in Experiment (5), the model demonstrated optimal performance on both KITTI and NEXET datasets, particularly on the KITTI dataset, where precision, F1 score, mAP@0.5, and FPS were improved to 76.72%, 74.62%, 75.32%, and 85, respectively, with similar significant improvements observed on the NEXET dataset. This series of ablation studies not only verifies the importance of CBAM, TFPN, and FastDet in enhancing model performance but also provides strong evidence for designing efficient object detection models, emphasizing the effectiveness of our model in the field of autonomous driving.

4.6 Discussion

Based on the visualization results shown in Figure 8, we can observe that each detection box represents the actual predicted location of objects, with the top of the detection box displaying the predicted category and confidence score. These results demonstrate the outstanding detection performance of the proposed YOLOv8-Lite, especially in terms of recognizing small objects. Compared to the original YOLOv8

model, YOLOv8-Lite significantly improves overall precision while maintaining prediction accuracy. This achievement is primarily attributed to optimizations made in the model architecture, including the introduction of more efficient feature extraction and fusion mechanisms, as well as an optimized network structure designed to reduce computational complexity while enhancing the model’s ability to recognize small objects.

Further analysis shows that our network is more comprehensive in object detection. As demonstrated in Figure 9, there are many missed detections by YOLOv8, which we have marked with red boxes. In contrast, our model effectively reduces missed detections, thereby improving the comprehensiveness and accuracy of detection. Additionally, the robustness of our model in handling complex scenes has significantly improved. In environments with dense objects, YOLOv8-Lite not only reduces missed detections but can also more accurately distinguish and locate objects that are close to each other, a task that is challenging for conventional models. This capability of our model is attributed to the in-depth optimization of the feature extraction layers and network structure, enabling the model to more effectively capture subtle feature differences and thus achieve more accurate object detection in complex environments.

However, our network also has some limitations. As shown in Figure 10, it is evident that in conditions of poor lighting or snowy weather, our model cannot comprehensively and accurately detect objects. This phenomenon is mainly due to the significantly reduced visibility of objects in these special environments, making it difficult for the model to capture sufficient feature information, thereby affecting the accuracy and comprehensiveness of detection.

To address this issue, future work needs to consider the introduction of more powerful feature extraction and enhancement techniques, such as using deeper network structures or introducing environment-adaptive algorithms, to improve the model's performance in complex environments. Additionally, leveraging multimodal data (such as radar and infrared images) may also be an effective means to enhance the model's robustness, as these technologies can provide additional environmental information when visual information is insufficient.

5 Conclusion

In our study, we proposed a lightweight object detection model based on the YOLOv8-Lite framework and validated it on the NEXET and KITTI datasets. Experimental results demonstrate that our model performs well in the task of object detection. This model significantly enhances efficiency and inference speed while reducing the number of parameters. Additionally, through comprehensive evaluation of various metrics, our model exhibits reliability and effectiveness in real-world applications such as autonomous driving. However, our model still has some limitations. Firstly, due to constraints in model parameters and network structure, our model may perform poorly in handling complex scenes and occlusion situations. Secondly, owing to dataset limitations and training strategy choices, the model may encounter overfitting or underfitting issues in specific scenarios, affecting its generalization ability and stability.

Looking ahead, we will continue to improve the model's design and training strategies to enhance its adaptability and robustness in complex scenes. Furthermore, we plan to expand the scale and diversity of the dataset to comprehensively evaluate the model's performance and generalization ability. Additionally, we aim to explore more advanced object detection technologies and algorithms to address the challenges in fields like autonomous driving, contributing to the development of intelligent transportation systems.

Data Availability Statement

Data will be made available on request.

Funding

This work was supported without any funding.

Conflicts of Interest

The authors declare no conflicts of interest.

Ethical Approval and Consent to Participate

Not applicable.

References

- [1] Huang, Y., & Chen, Y. (2020). Autonomous driving with deep learning: A survey of state-of-art technologies. *arXiv preprint arXiv:2006.06091*. [CrossRef]
- [2] Grigorescu, S., Trasnea, B., Cocias, T., & Macesanu, G. (2020). A survey of deep learning techniques for autonomous driving. *Journal of field robotics*, 37(3), 362-386. [CrossRef]
- [3] Janai, J., Güney, F., Behl, A., & Geiger, A. (2020). Computer vision for autonomous vehicles: Problems, datasets and state of the art. *Foundations and Trends in Computer Graphics and Vision*, 12(1-3), 1-308. [CrossRef]
- [4] Feng, D., Harakeh, A., Waslander, S. L., & Dietmayer, K. (2021). A review and comparative study on probabilistic object detection in autonomous driving. *IEEE Transactions on Intelligent Transportation Systems*, 23(8), 9961-9980. [CrossRef]
- [5] Mao, J., Shi, S., Wang, X., & Li, H. (2023). 3D object detection for autonomous driving: A comprehensive survey. *International Journal of Computer Vision*, 131(8), 1909-1963. [CrossRef]
- [6] Redmon, J., Divvala, S., Girshick, R., & Farhadi, A. (2016). You only look once: Unified, real-time object detection. In *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 779-788).
- [7] Liu, S., Qi, L., Qin, H., Shi, J., & Jia, J. (2018). Path aggregation network for instance segmentation. In *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 8759-8768).
- [8] Ren, S., He, K., Girshick, R., & Sun, J. (2015). Faster r-cnn: Towards real-time object detection with region proposal networks. *Advances in neural information processing systems*, 28.
- [9] Liu, W., Anguelov, D., Erhan, D., Szegedy, C., Reed, S., Fu, C. Y., & Berg, A. C. (2016). Ssd: Single shot multibox detector. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part I 14* (pp. 21-37). Springer International Publishing. [CrossRef]

- [10] Cai, Z., & Vasconcelos, N. (2018). Cascade r-cnn: Delving into high quality object detection. In *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 6154-6162).
- [11] He, K., Gkioxari, G., Dollár, P., & Girshick, R. (2017). Mask r-cnn. In *Proceedings of the IEEE international conference on computer vision* (pp. 2961-2969).
- [12] Howard, A. G., Zhu, M., Chen, B., Kalenichenko, D., Wang, W., Weyand, T., ... & Adam, H. (2017). Mobilenets: Efficient convolutional neural networks for mobile vision applications. *arXiv preprint arXiv:1704.04861*. [CrossRef]
- [13] Tan, M., Pang, R., & Le, Q. V. (2020). Efficientdet: Scalable and efficient object detection. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition* (pp. 10781-10790).
- [14] Zhang, S., Wen, L., Lei, Z., & Li, S. Z. (2020). RefineDet++: Single-shot refinement neural network for object detection. *IEEE Transactions on Circuits and Systems for Video Technology*, 31(2), 674-687. [CrossRef]
- [15] Han, S., Mao, H., & Dally, W. J. (2015). Deep compression: Compressing deep neural networks with pruning, trained quantization and huffman coding. *arXiv preprint arXiv:1510.00149*. [CrossRef]
- [16] Jacob, B., Kligys, S., Chen, B., Zhu, M., Tang, M., Howard, A., ... & Kalenichenko, D. (2018). Quantization and training of neural networks for efficient integer-arithmetic-only inference. In *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 2704-2713).
- [17] Carranza-García, M., Lara-Benítez, P., García-Gutiérrez, J., & Riquelme, J. C. (2021). Enhancing object detection for autonomous driving by optimizing anchor generation and addressing class imbalance. *Neurocomputing*, 449, 229-244. [CrossRef]
- [18] Arora, N., Kumar, Y., Karkra, R., & Kumar, M. (2022). Automatic vehicle detection system in different environment conditions using fast R-CNN. *Multimedia Tools and Applications*, 81(13), 18715-18735. [CrossRef]
- [19] Soylu, E., & Soylu, T. (2024). A performance comparison of YOLOv8 models for traffic sign detection in the Robotaxi-full scale autonomous vehicle competition. *Multimedia Tools and Applications*, 83(8), 25005-25035. [CrossRef]
- [20] Redmon, J., & Farhadi, A. (2018). Yolov3: An incremental improvement. *arXiv preprint arXiv:1804.02767*. [CrossRef]
- [21] Zou, Z., Chen, K., Shi, Z., Guo, Y., & Ye, J. (2023). Object detection in 20 years: A survey. *Proceedings of the IEEE*, 111(3), 257-276. [CrossRef]
- [22] Terven, J., Córdova-Esparza, D. M., & Romero-González, J. A. (2023). A comprehensive review of yolo architectures in computer vision: From yolov1 to yolov8 and yolo-nas. *Machine learning and knowledge extraction*, 5(4), 1680-1716. [CrossRef]
- [23] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., ... & Polosukhin, I. (2017). Attention is all you need. *Advances in neural information processing systems*, 30.
- [24] Lin, T. Y., Dollár, P., Girshick, R., He, K., Hariharan, B., & Belongie, S. (2017). Feature pyramid networks for object detection. In *Proceedings of the IEEE conference on computer vision and pattern recognition* (pp. 2117-2125).
- [25] Wang, C. Y., Liao, H. Y. M., Wu, Y. H., Chen, P. Y., Hsieh, J. W., & Yeh, I. H. (2020, June). CSPNet: A New Backbone that can Enhance Learning Capability of CNN. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)* (pp. 1571-1580). IEEE. [CrossRef]
- [26] SoleSensei. (n.d.). NExET original dataset (Version n.a.) [Data set]. Kaggle. <https://www.kaggle.com/datasets/soleseisei/nexet-original>
- [27] Geiger, A., Lenz, P., & Urtasun, R. (2012, June). Are we ready for autonomous driving? the kitti vision benchmark suite. In *2012 IEEE conference on computer vision and pattern recognition* (pp. 3354-3361). IEEE. [CrossRef]
- [28] Liao, Y., Xie, J., & Geiger, A. (2022). Kitti-360: A novel dataset and benchmarks for urban scene understanding in 2d and 3d. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 45(3), 3292-3310. [CrossRef]
- [29] Chen, X. (2022, October). Traffic lights detection method based on the improved yolov5 network. In *2022 IEEE 4th International Conference on Civil Aviation Safety and Information Technology (ICCASIT)* (pp. 1111-1114). IEEE. [CrossRef]
- [30] Li, S., Wang, S., & Wang, P. (2023). A small object detection algorithm for traffic signs based on improved YOLOv7. *Sensors*, 23(16), 7145. [CrossRef]
- [31] Tian, Z., Shen, C., Chen, H., & He, T. (2020). FCOS: A simple and strong anchor-free object detector. *IEEE transactions on pattern analysis and machine intelligence*, 44(4), 1922-1933. [CrossRef]
- [32] Talaat, F. M., & ZainEldin, H. (2023). An improved fire detection approach based on YOLO-v8 for smart cities. *Neural Computing and Applications*, 35(28), 20939-20954. [CrossRef]