



Primary Thought on the Incorporation of Intelligent Control and U-control (I-U-control)

Quanmin Zhu¹ and Haihong Wang^{2,*}

¹ School of Engineering, University of the West of England, Bristol BS16 1QY, United Kingdom

² College of Information Science and Technology, Qingdao University of Science and Technology, Qingdao 266061, China

Abstract

This study explains the main idea and structure of a What-How intelligent control (WH-I-control) system and a universal control (U-control) system. The system has two control layers. The bottom layer uses the U-control framework to manage 'How' to control within a universal framework. The top layer uses intelligent control (I-control) to coordinate and guide 'What' to achieve both global and local control goals. This study also reviews the configurations, functions, and integration of these two control layers in analysis, design, and applications.

Keywords: universal(U)-control, data-driven operation, control Lyapunov stability, lyapunov derivative inequality, intelligent (I)-control, goal-oriented control systems (GOCS), What-How intelligent control systems (WH-ICS).

1 Introduction

The universal control (U-control) framework introduces a versatile paradigm in control systems

engineering, offering a comprehensive configuration and basic functionality to enhance the conventional approaches. Its key innovation lies in 1) general instant and asymptotic model inversions, 2) complete sliding mode control crossing the full range between model-based and model-free, 3) separated designs of stabilisation and tracking control, which can either fully take advantage of a given model and/or eliminate the need for complex system modelling while maintaining the required control performance. The U-control framework is characterised by its simplicity, total robustness, and model-free architecture, making it well-suited for industrial applications rife with complexity and uncertainty and enhancing the operational flexibility and efficiency through communication between man-machine directly, a supplement to man-model-machine in conventional routines. The new research on the Framework of U-control may refer to [1].

1.1 Framework of Universal (U)-Control

The U-control framework [1] as shown in Figure 1 has been proposed for configuring dynamic control systems with reference to plant model and/or model-free, which is built on several critical anchors, including:

1. **Dynamic Inversion:** Both model-based instantaneous dynamic inversion (IDI) and model-free asymptotic dynamic inversion (ADI).
2. **Model-Free Sliding Mode Control (MFSMC):**

Citation

Zhu, Q., & Wang, H. (2025). Primary Thought on the Incorporation of Intelligent Control and U-control (I-U-control). *ICCK Transactions on Sensing, Communication, and Control*, 2(3), 132–146.

© 2025 ICCK (Institute of Central Computation and Knowledge)



Academic Editor:

Debnath Bhattacharyya

Submitted: 05 April 2025

Accepted: 06 May 2025

Published: 20 July 2025

Vol. 2, No. 3, 2025.

doi:10.62762/TSCC.2025.880778

*Corresponding author:

✉ Haihong Wang

wanghaihong@qust.edu.cn

Ensures robustness without relying on system models. The MFSMC improves traditional Proportional-integral-derivative (PID) control by using full-state feedback sliding mode manifold instead of standard output errors.

3. **Lyapunov Derivative Inequality (LDI):** Provides a theoretical foundation for stability analysis in model-free systems.
4. **Simplicity and Robustness:** The framework is designed to be simple to implement while maintaining high robustness across a wide range of structural system dynamics, such as nonlinear nonaffine, input/output coupling, underactuated, neural type, and so on.

List of symbols and abbreviations.

U-control	Universal-control
I-control	Intelligent I-control
WH-I-control	What-How intelligent control
WH-ICS	What-How intelligent control systems
GOCS	Goal-oriented control systems
ADI	Asymptotic dynamic inversion
IDI	Instantaneous dynamic inversion
MFSMC	Model-Free Sliding Mode Control
LDI	Lyapunov Derivative Inequality
UDI	Universal dynamic inversion
PM	Model-based physical
OM	Online model-based
LQR	Linear quadratic regulation
PP	Pole-placement
NN	Neural networks
TMF	Total model-free
TMFRC	Total model-free robust control
RSF	Robustness sensitivity function
UAV	Unmanned Aerial Vehicles
AI	Artificial intelligence
ML	Machine learning
RL	Reinforcement Learning
DL	Deep learning
HSs	Hybrid systems
GA	Genetic algorithms
PSO	Particle swarm optimisation
ACO	Ant Colony Optimisation
BTP	Burn-through point
VSS	vertical sintering speed
HICS	Hierarchical intelligent control systems
MAS	Multi-agent systems

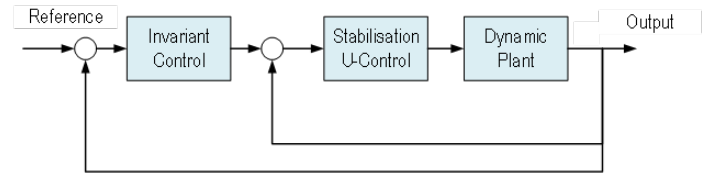


Figure 1. The U-control framework.

burden and complexity induced by treating the plant in the control system design, U-control has separated the controller design from the plant directly. The universality is explained below.

1. **Universality of U-control in the aspect of models:** The universality of U-control lies in its feasibility in designing control systems by referring to the plant model or treating the plant as an agnostic box with admissible inputs and attainable outputs. This is expressed by the function of:

$$aD_{mb} + bD_{mf}, a + b = 1 \quad (1)$$

where D_{mb} and D_{mf} denote model-based and model-free approaches respectively. Coefficient $a = 1$ corresponds to fully model-based control, $0 < a < 1$ represents nominal model-based control, where $a = 0$ indicates fully model-free control. The parameter a reflects the degree of trust in the system model's fidelity [1]. The U-control framework, as illustrated in Figure 1, separates the robust stabilization of plant dynamics (inner loop) [1] from the control system performance specification (outer loop) [2]. This separation allows for greater flexibility, simplicity, and robustness in designing and tuning control systems for various applications, such as motion control in various mechatronic systems.

2. **Universal dynamic inversion (UDI):** The generalized universal dynamic inversion features two innovative concepts and algorithms: IDI and ADI. IDI relies on the given model to directly invert the system dynamics by solving the associated equations, which enable to separate control system performance control and the treatment of the associated plant. ADI, in a prototype of closed loop control, drives the system dynamics over time and gradually achieves inversion while the plant treated as an agnostic dynamic. Furthermore, in fully actuated multi-input and multi-output (MIMO)

Generally, there are two key factors in control system design, 1) description of the plant to be controlled, and 2) the controller to change the plant performance by feedback. The phrase U-control comes from the following considerations, which try to reduce the

systems, MIMO are often coupled, meaning changes in one input can affect multiple outputs. The general UDI extends dynamic inversion to include decoupling, which ensures that each input primarily affects its corresponding output, minimizing unwanted interactions [42].

3. **Universal design by separating stabilization and tracking:** In control system design, two main methods have been conventionally adopted (1) model-based physical (PM) design, e.g., linear quadratic regulation (LQR) and pole-placement (PP) control, and (2) data-driven adaptive pointwise online model-based (OM) design, which includes techniques like adaptive control, neural networks (NN) enhanced control, reinforcement learning (g) control.

Both approaches involve model-based control, PM is typically derived theoretically or experimentally beforehand the design phase. The OM is determined by a pointwise data fitting model updated in real-time, most of the time employing data iteration for control decisions. U-control covers both model-based designs in a generic procedure, and further supplements total model-free (TMF) control. By introducing TMC robust control (TMFRC) to the U-control and treating systems as complete uncertainties within a black box, focusing on available inputs and measurable outputs, while eliminating the need for physical and data-driven models, as well as data iteration. The U-control method simplifies and enhances the control system design while offering simplicity and robustness in control functionality and parameter tuning. TMFRC employs an MFSSMC that ensures robust stability by satisfying the LDI. Unlike the trial-and-error tuning method commonly used with PID controllers, TMFRC ensures consistent performance within system limits. For example, the PID auto-tuning function in Simulink demonstrates this contrast by simplifying the tuning process through three predefined gain combinations.

4. **Expanded analysis of robustness sensitivity function (RSF):** With the TMF control is proposed, evaluate its robustness becomes a critical consideration. Conventional RSF is a model-based approach for assessing robustness. In the context of U-control, a total RSF has been proposed for the model free U-control systems

[1]. However, the total RSF is still required for further justification and formulation in theoretical aspects.

5. **Industrial applications with TMF control:** While keeping the merits of model-based approaches, the MF approach 1) provides opportunities for operators to directly interact with systems rather than through models, to adjust its operations based on rewards or feedback from past experiences, 2) reduces computational demand and complexity, no iterative data training loops, 3) increases flexibility and generalisation for system maintenance and re-calibration without re-modelling, 4) may be the model-free approach could provide a new prototype for co-design of various emerging systems, such as Industrial IoT Systems, Unmanned Aerial Vehicles (UAV) co-design refers to the interdisciplinary approach of designing both the physical hardware and the control systems (software) of UAVs in an integrated and collaborative manner [3]. Unlike traditional design methodologies where the hardware and software are developed independently, the co-design emphasises the joint optimisation of both aspects to improve the performance, efficiency, and adaptability of UAVs for various applications. These are very useful for practical nonlinear dynamic system operations.

1.2 Framework of Intelligent (I)-control

An intelligent system refers to a system that incorporates elements of artificial intelligence (AI) to perform tasks that typically requiring human cognitive abilities. These tasks include reasoning, learning, problem-solving, decision-making, perceiving the environment, and natural language processing. Powered by cutting-edge technologies, intelligent systems revolutionize traditional models and create new paradigms of human-machine collaboration with high efficiency, precision, and automation.

1.2.1 The predominant characteristics of intelligent systems

The predominant characteristics of intelligent systems include the following:

1. **Autonomy:** They can operate independently without continuous human intervention.
2. **Adaptability:** They learn and improve from experiences and adapt to changing environments.
3. **Reasoning:** They can make logical decisions based on available data and knowledge.

4. Perception: They use sensors or input data to perceive and understand their environment.
5. Interaction: They interact Grosan with humans and other systems through natural language, visuals, or other means.

1.2.2 Framework Of I-control

Regarding the intelligence enhanced control system analysis and design called intelligent control systems, I-control in short in the study. I-control is admitted as an advanced control method that utilises artificial intelligence (AI) techniques to enhance the performance and decision-making capabilities of traditional control systems. These systems are designed to manage dynamic and complex processes where conventional control strategies may fall short [4]. Here a summary of the I-control is presented for the completeness of the study. The major types of intelligent systems widely used come in various forms [39, 41]. The key techniques frequently used in I-control can be shown as Figure 2, which illustrates an overview of key AI-based algorithms and their associated functionalities. Some of the hot topics with intelligent systems have been witnessed below. These include more human-like interaction capabilities, greater autonomy and decision-making power, enhanced integration with IoT (Internet of Things) devices, and ethical and secure AI systems that ensure fairness and privacy:

1. Optimisation-Driven Control methods: Metaheuristic methods have emerged as powerful tools in optimizing control systems, providing efficient strategies for achieving optimal system performance [5]. Swarm Intelligence techniques [6] such as Particle swarm optimisation (PSO) [7] and Ant Colony Optimisation (ACO) [8] have been successfully applied in tuning control parameters, optimizing controller gains, and improving system response times. These methods mimic the collective behaviours seen in natural swarms and colonies, allowing for robust optimisation within control systems. Evolutionary Computation methodologies, including Genetic algorithms (GA) [9] and Differential evolution [10], have demonstrated profound in Figure 2 in evolving potential solutions through principles inspired by biological evolution. All the algorithms above effectively explore solution spaces, enhancing and refining candidate solutions to achieve optimal or suboptimal results.
2. Machine learning (ML) Enhanced Control: ML represents a sophisticated paradigm within the field of artificial intelligence, offering a diverse array of techniques to discern patterns and make decisions without being explicitly programmed. (a) Supervised Learning. The method uses annotated data to train models, mainly applied to predictive modelling tasks such as regression analysis [11] and classification tasks [12]. (b) Unsupervised Learning. Clustering methods, such as k-means [13], and dimensionality reduction techniques [14], such as kernel PCA with decentralized frameworks [40], are used to analyse unlabelled datasets and discover patterns without human supervision [15]. An unsupervised machine learning algorithm: Comprehensive review. International Journal of Computing and Digital Systems.). (c) Reinforcement Learning (RL), which allows agents to learn optimal decision-making policies by interacting with their environment through trial and error. Widely used in autonomous systems like robotics control [16], game AI [17], industrial automation [18], self-driving vehicle technologies, and personalized recommendation systems (d) Deep Learning (DL). (e) NN Control: NN Control involves the learning of patterns and approximation of complex nonlinear functions, particularly useful in systems lacking mathematical models or where such models are not practical including Feedforward Neural Networks, Convolutional Neural Networks, Recurrent Neural Networks, Long Short-Term Memory networks, and Transformers (f) Transfer Learning (g) Federated Learning Hybrid systems (HSs): HSs blend various AI technologies, such as NN with fuzzy logic and genetic algorithms with expert systems [19–21]. Hybrid Intelligent Systems incorporate multiple AI techniques to enhance performance. While Hybrid Control Architectures integrate traditional control methods like PID control with AI technologies to establish hierarchical or collaborative control strategies [22].
3. Hybrid systems (HSs): HSs blend various AI technologies, such as NN with fuzzy logic and genetic algorithms with expert systems [20, 21]. Hybrid Intelligent Systems incorporate multiple AI techniques to enhance performance. While Hybrid Control Architectures integrate traditional control methods like PID control

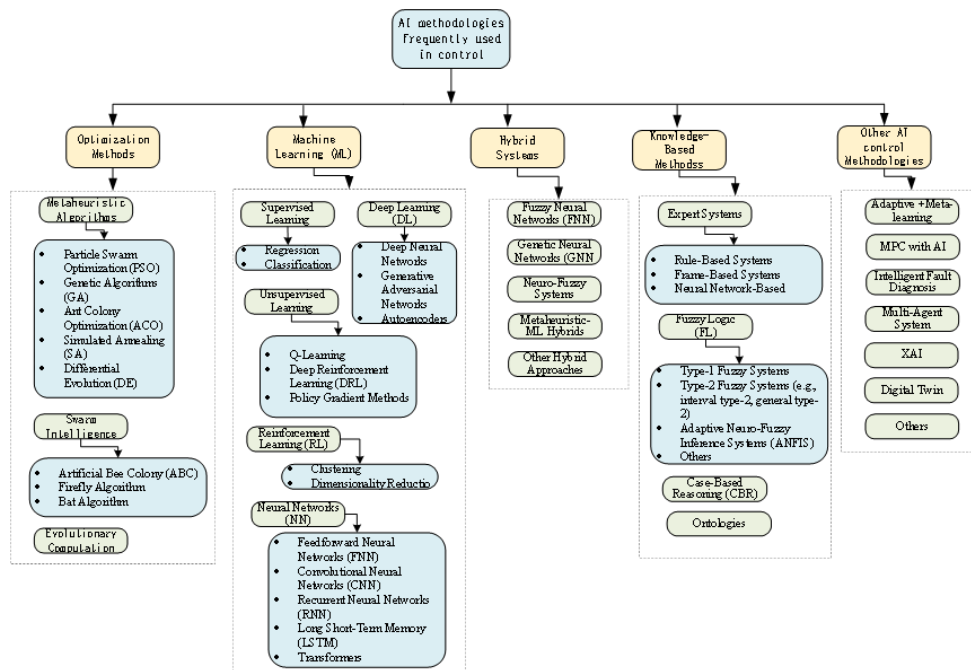


Figure 2. Classification of AI-based control techniques.

with AI technologies to establish hierarchical or collaborative control strategies [22].

4. **Knowledge-Driven Control Methods:** Knowledge-driven control methods utilize structured knowledge and reasoning techniques, including expert systems for rule-based decision-making [23], fuzzy logic for handling uncertainty, case-based reasoning for adaptive problem-solving, and ontologies for formalizing domain knowledge in control applications [24].
5. **Other AI-based control methods:** Other AI-based control methods include digital twin-based systems for real-time simulation and predictive control [25], explainable AI for transparent and interpretable decision-making [26], quantum control for leveraging quantum computing in optimisation and system dynamics [27], and multi-agent systems (MAS) for distributed coordination and collaborative problem-solving in complex environments [28].

2 Integration of intelligent systems with traditional control methods for enhanced performance

2.1 Hybrid AI-Traditional Control Methods

These methods in Figure 2 can be used individually, or combined with traditional control methods (e.g., PID control) to form HSs. The core idea is to leverage AI's self-learning, self-adaptive, and nonlinear processing

capabilities to compensate for the limitations of traditional control methods in complex systems. Table 1 gives us the common integration approaches and their application scenarios.

2.2 Hierarchical Structure of Complex Systems

Among methods in Table 1, Intelligent control often adopts a layered structure in complex systems to achieve more efficient control and management [29]. The hierarchical methods proposed in the literature are typically divided into 2 layers, 3 layers, or more layers, with the specific number of layers and their distinctions depending on the application scenario and system complexity. Below is a summary of common hierarchical methods and their differences:

1. 2-Layer Structure:

The 2-layer structure is the simplest hierarchical method, typically divided into a high layer and a low layer [30].

- (a) The High Layer offers decision-making and optimisation at a strategic level. It is responsible for global optimisation, task planning, and decision-making technologies.
- (b) The low layer generates and executes real-time control signals. It typically uses traditional control methods (e.g., PID control) or fundamental intelligent control techniques (e.g., fuzzy control). These methods suit simpler systems

Table 1. Comparison of integration methods.

Integration Method	Advantages	Challenges	Application Scenarios
Direct Replacement	Simplifies design while adapting to nonlinear systems	Requires large amounts of training data, limited real-time performance, poor interpretability	Simple control tasks (e.g., temperature regulation)
Hybrid Control	Balances robustness and precision	High structural complexity and challenging parameter tuning, complex coordination strategy design	Complex industrial processes, robotics
Hierarchical Structure	Strong scalability, suitable for complex tasks	Requires coordination across multiple layers of communication	Large-scale systems (e.g., smart grids)
AI Parameter Tuning	Enhances the performance of traditional controllers	Offline optimisation may not adapt to dynamic changes, online learning may cause instability	Motor control, chemical processes
High-Level Optimisation and Decision-Making	Enables global optimisation and coordination of complex systems	High computational complexity, difficulty in balancing multiple objectives	Smart grids, multi-robot systems, smart cities
Fault Diagnosis and Fault-Tolerance	Improves system safety	Depends on the completeness of fault data, diverse fault modes	Aerospace, industrial robotics
Data-Driven Control	Addresses model uncertainties	High computational overhead, relies on data quality, data privacy issues	High-precision manufacturing, complex dynamic systems
Reinforcement Learning Synergy	Adapts to dynamic environments	Long training times, difficult safety verification and exploration may lead to system failure	Intelligent transportation, game AI
Edge Intelligent Control	Low latency, high real-time performance	Limited computational resources, difficulty in model light weighting	Industrial IoT, autonomous driving
Digital Twins	High-precision modelling and simulation, support predictive maintenance	Requires high-fidelity models, high data synchronization costs	Smart manufacturing, smart cities
Human-Machine Collaborative Control	Combines human expertise with AI computational power	Complex human-machine interaction design, difficulty in building trust	Medical robotics, collaborative robotics
AI-based Adaptive Control	Dynamically adapts to environmental changes	The stability of online learning is difficult to guarantee	Drones, robotics

like single-robot control or smart home automation.

2. 3-Layer Structure

The 3-layer structure framework is a widely adopted organisational approach. It consists of a high layer, a middle layer, and a low layer. While the higher and lower layers align with the 2-layer structure, the inclusion of the middle layer, referred to as the coordination and control layer, adds a critical element to intelligent systems.

The Middle Layer addresses complex scenarios such as multi-robot coordination and advanced process control, highlighting its ability to enable smooth interactions and improve overall system performance. It is essential for managing intricate collaborations among multiple subsystems in intelligent systems. Figure 3 shows the other

configuration of hierarchical intelligent control systems [31], which is structured in general control terminologies and functionalities.

3. 4-Layer or More Layer Structure

For more complex systems, the literature sometimes proposes 4 or more-layer methods. Below is a typical 4-layer structure [32], Figure 4 shows a conventional configuration of hierarchical manufacturing control operation [32]. In such frameworks, the system resembles a network of interconnected nodes arranged in a tiered framework. Directives and objectives cascade downward from higher-level nodes to subordinate units, while sensory feedback and operational outcomes propagate upward. Lateral communication between peer nodes enables localized coordination.

- (a) High Layer is task planning and scheduling layer, it determines the overall strategy and sequence of tasks to be executed, ensuring that the system operates efficiently and meets its objectives.
- (b) Sub-High Layer: is responsible for global optimisation and multi-subsystem coordination. The primary goal of this layer is to ensure that all subsystems work harmoniously to achieve the best overall performance.
- (c) Middle Layer: Control and Adjustment Layer: It monitors the performance of the subsystems and makes necessary adjustments to ensure that they operate within the desired parameters. This layer acts as a bridge between the high-level planning and the low-level execution.
- (d) Low Layer: Execution Layer. It directly interacts with the hardware and software components to carry out the commands received from the higher layers.

Levels 2-4 extended time horizons for strategic planning and execution cycles, whereas lower levels 0-2 prioritize localized, real-time operations with immediate response requirements. Lower levels execute context-specific tasks with minimal interference from upper layers, which focus on global coordination and abstract reasoning. For instance, foundational layers rely on reactive, data-driven processes (e.g., sensor-actuator loops), while upper tiers employ abstract models and predictive analytics to coordinate long-term objectives. This architecture aligns well with hierarchical task network methodologies, which systematically decompose complex objectives into manageable actions across levels.

3 Synergistic Integration of U-Control and I-Control

3.1 Motivation for U-I-Control Synergy

From the above discussion, it is evident that U-control excels at providing robust, TMF stabilisation and tracking, ensuring system stability even under uncertainties and disturbances, plus simplicity in the system design and tuning. Primarily, I-control introduces adaptability and learning capabilities, enabling the system to optimise performance in complex, non-stationary environments dynamically.

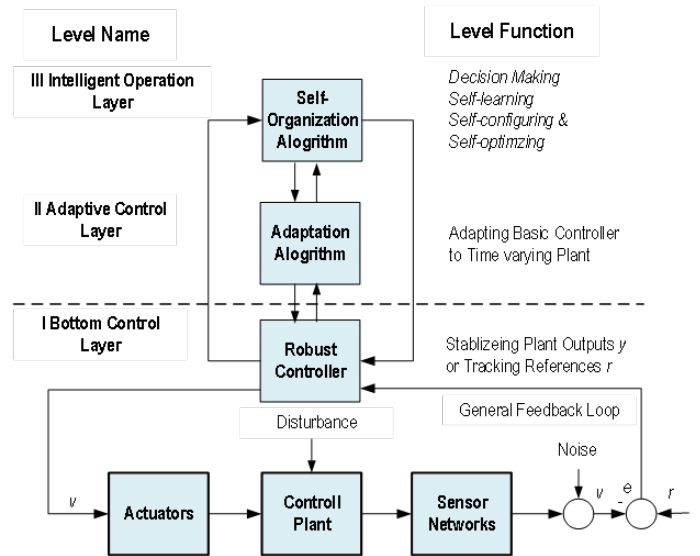


Figure 3. Three layers of intelligent control systems.

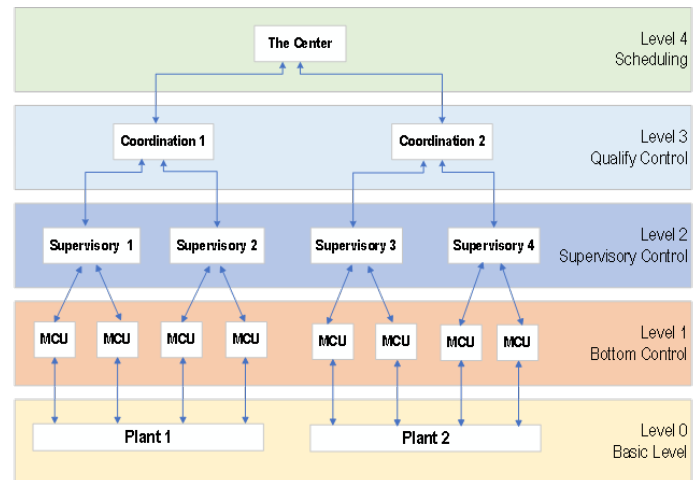


Figure 4. Conventional hierarchical manufacturing control operation [32].

It also leverages high-level decision-making and optimisation, allowing the system to refine control strategies without manual intervention autonomously. Thus, it is possible to synergy robust adaptability, simplify control design and support scalable applications. Industrial and autonomous systems often face challenges such as unmodeled dynamics, fault tolerance, real-time constraints, real-time decision-making, and energy efficiency requirements. The U-I synergy addresses these challenges by combining U-control's real-time robustness with I-Control's optimisation and fault tolerance, as demonstrated in applications like autonomous vehicles (to be explained in Section 4.1) and industrial processes (to be explained in Section 4.2).

3.2 Synergistic Enhancement of I-Control via U-Control

While U-control focuses on achieving stability and simplicity in control systems, its integration with more advanced intelligent approaches like GOCS [33] enhances performance in dynamic environments. GOCS are designed to focus on achieving specific objectives or goals within a system, rather than merely following predefined setpoints or rules. suggest shifting from instructing a system on how to perform a task to specifying what needs to be achieved and aims to optimise performance by adjusting actions in real-time. As shown in Figure 5. Combining U-control's strengths with the flexibility and adaptability of GOCS makes it possible to address more complex, dynamic goals in real-time.

Based on the I-Control framework, the U-control method can be integrated into two distinct approaches. The first is a hybrid control strategy that combines U-control with underlying control methods. The second is a hierarchical control architecture, where the lower layer directly employs the U-control method as formulated in Figure 1 and Equation (1). In contrast, the upper level utilises I Control-based optimisation for enhanced performance. Focusing on high-level goals and constraints allows the system to adapt to changing environments, while U-control's robustness ensures that it can handle unexpected disturbances or dynamic changes as shown in Figure 5. The high-level goals and constraints from GOCS can be used to define the desired system performance in the outer loop of the U-control framework. The inner loop of U-control can handle the robust stabilization and decoupling of the system, ensuring that the control actions are feasible and robust to uncertainties.

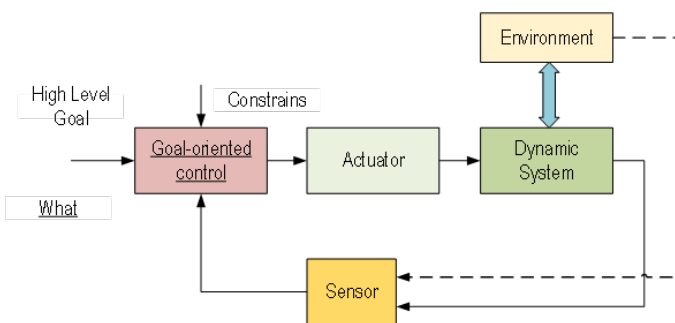


Figure 5. Goal-oriented control system (GOCS).

U-control's integration with GOCS, as illustrated in this framework, is just one possible approach. Table 2 outlines other potential combinations of I-control with U-control. Notably, TMF U-control is considered a priority for integrating with I-control

because it offers a simpler and more direct approach to handling uncertainties and nonlinearities in systems without requiring detailed mathematical models. This combination capitalizes on U-control's robustness and AI's adaptability and learning capabilities, leading to more efficient and flexible control in complex dynamic systems.

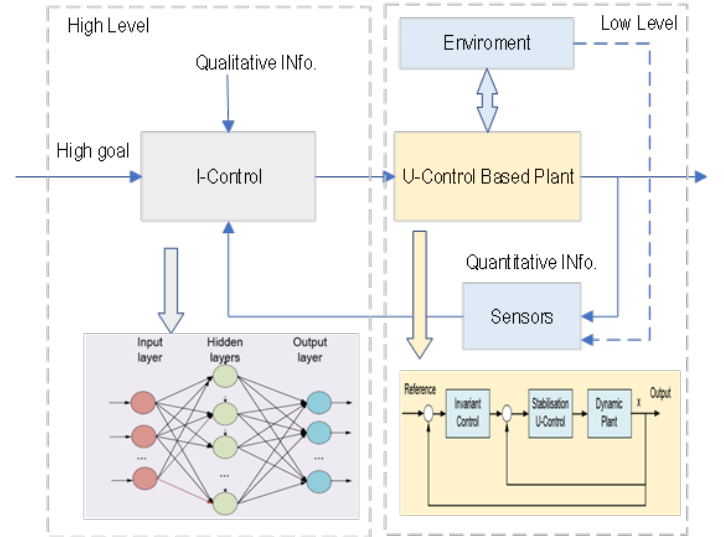


Figure 6. Flowchart for the design of the incorporation of U-control and I-control.

3.3 High-Level Integration Strategies

3.3.1 Core Integration Architecture

This section introduces the key strategies for integrating U-control and I-control, outlining how these objectives are achieved through the following four steps

1. Inner Loop design: The inner loop control is designed using either model-based or TMF control strategies [1]. The primary goal is to make the bottom-layer control loop universal, straightforward in design, robust in tuning, and against internal/external uncertainties. This ensures that the inner loop operates reliably, rapidly and consistently under varying conditions so that the up-layer I-control can confidently treat the U-loop as an ideal functional point or a group of objects while designing the I-control loop.
2. Constraint and Safety Management: To address system constraints and safety requirements, a TMF U-control framework should be developed. This framework ensures that the system can handle operational limits and safety concerns without relying on precise system models, making it adaptable to complex and uncertain

Table 2. Comparative framework for AI integration in model-based and TMF U-control systems.

Direction/Method	Model-based U-control	TMF U-control
Universal Dynamic Inversion	Use precise models for UDI to linearize the system. AI can optimise the inversion process, improving accuracy and robustness.	Use AI (e.g., RL or NN) to achieve TMF universal dynamic inversion, learning the inverse model directly from input-output data, and adapting to system uncertainties.
Parameter Optimisation	AI optimises controller parameters (e.g., PID parameters, PP parameters) based on model performance metrics.	AI optimises parameters of TMF controllers, such as gains in sliding mode control (SMC), using data-driven approaches to adapt to system dynamics.
Fault Diagnosis & Fault-tolerant Control	Combine AI (e.g., DL) for fault detection and diagnosis, using model knowledge to quickly locate faults and adjust control strategies.	Use AI (e.g., reinforcement learning) for TMF fault-tolerant control, learning in real-time to adapt to the system's dynamics under fault conditions.
Data-driven Modelling	AI extracts model features from data to assist in the design of model-based U-control, improving model accuracy and adaptability.	AI learns the system's input-output relationship directly from data, building TMF control strategies without relying on a priori models.
Reinforcement Learning	Combine reinforcement learning to optimise model-based control strategies, using model predictions to optimise control actions.	Reinforcement learning is at the core of TMF U-control, learning through trial and error to optimise control strategies for complex dynamic systems.
Digital Twins	Digital Twins combined with model-based U-control, using AI to optimise model parameters and control strategies, achieving real-time monitoring and optimisation.	Digital Twins combined with TMF U-control; AI adjusts control strategies in real time to adapt to system dynamic changes.
Human + AI Control	Human operators combined with model-based U-control use AI to assist in decision-making and improve control accuracy and efficiency.	Human operators combine with TMF U-control. AI provides real-time suggestions, and operators make the final decision, adapting to complex environments.
Distributed Control	AI optimises distributed model-based U-control strategies, coordinating MAS.	AI optimises distributed model-free U-control strategies, adapting to the dynamic changes in MAS.
Robustness Enhancement	AI analyses model uncertainties to optimise the robustness of model-based U-control.	AI continuously updates TMF control laws from streaming data.
Real-Time Adaptation	AI detects a deviation between the model and real-world and update the model in recalculated optimal control parameters.	AI learns the optimal control strategy and detects a deviation directly from feedback data without relying on models., U-control proactively adapts inputs based on predictions.

environments.

3. Outer Loop design: Optimise the system's performance specifications by employing intelligent control methods (as depicted in Figure 6) and adjust the PID parameters

through fuzzy rules to adapt to system changes dynamically [34]. Additionally, optimise the parameters of the outer-loop controller using intelligent control techniques to achieve rapid system response and stable control. Furthermore,

it utilises reinforcement learning algorithms to optimise control strategies, enabling the system to adapt effectively to dynamic environments.

4. **Constraints:** To deal with constraints and safety, U-control algorithms must execute deterministically within the /inner loop's required time frame and avoid computationally intensive operations (e.g., high-dimensional matrix inversions) in MF implementations. For higher levels, ensure intelligent algorithms (e.g., RL, fuzzy inference) operate within real-time computational limits (e.g., sampling rates). Simplify optimisation problems (e.g., use lightweight NN or rule-based approximations).
5. **Validation and Testing:** To achieve the above objectives, extensive bench-testing of the TMF U-control framework is essential. This testing should be conducted across a wide range of examples, at least in a simulated environment, to validate the robustness, adaptability, and performance of the proposed control strategies. Such validation ensures that the system is ready for real-world applications and can reliably meet the desired performance specifications.

3.3.2 High-Level Enhancement Strategies

While U-control provides a simplified and direct approach to achieving system stability, its inherent design may occasionally limit the attainment of globally optimal performance. To address this limitation, integrating an AI-driven intelligent controller at the supervisory level to dynamically refine the U-control parameters. Specifically, swarm intelligence algorithms—such as PSO and ACO—can be leveraged to explore complex, nonlinear parameter spaces, identifying near-global optima for control variables, by balancing transient response and stability margin, swarm intelligence reduces the inherent risk of over-optimisation in pure model free U-shaped control implementation, such as excessive actuator wear and oscillation behaviour.

1. **Human- AI Control and U-control:** In the U-control framework, human experience and real-time decision-making mechanisms can be integrated to form a human-machine collaborative division of labour mode: operators are responsible for high-level strategy formulation and abnormal supervision, while the U-control system performs dynamic fine-tuning for low-level control. Using intelligent methods such as fuzzy logic and NN to parse human

instructions and convert them into parameter adjustment signals retains the judgment advantage of expert experience in complex scenarios and ensures control accuracy through automation. This collaboration not only enhances the decision-making reliability of the system in uncertain environments but also strengthens operational trust through the "human safety net" mechanism - when the system encounters critical risks, manual intervention can quickly correct them, avoiding the potential risk of loss of control caused by full automation

2. **Digital Twins and U-control:** Combine U-control with digital twins technology to create a virtual replica of the physical system. This setup allows real-time testing and refinement of control strategies in a simulated environment before applying them to the system. By mirroring system dynamics, the digital twins act as a safe testing ground, enabling adjustments and validations without risking real-world performance. This integration streamlines control design, reduces development costs, and ensures smoother transitions from simulation to practical implementation.
3. **Hybrid Control Architecture:** A practical solution is to blend MF U-control with traditional model-driven strategies, guided by adaptive decision-making logic. Under stable conditions—where system dynamics are well understood, and high-fidelity models exist—the controller prioritises model-based methods for precision. However, when facing unmodeled disturbances (e.g., sudden load shifts, or environmental noise), it autonomously switches to the MF U-control framework. This transition is managed through performance-driven criteria: AI algorithms continuously evaluate real-time metrics like error thresholds and stability margins, triggering the optimal control mode.

By dynamically leveraging the accuracy of model-based approaches and the flexibility of U-control, the HSs maintains robust performance across routine operations and edge cases. For instance, in industrial robotics, this duality ensures smooth transitions between repetitive high-precision tasks and unpredictable scenarios like collision recovery.

3.4 Optimization Strategies for Bottom-Layer U-Control

Based on existing underlying U-control methods, further optimisation of their design and performance can be achieved in the following directions in the future:

1. The robustness and adaptability of underlying U-control can be further improved, for example, by combining I-control strategies and introducing adaptive sliding mode control algorithms to enhance the ability to suppress unmodeled dynamics and external disturbances.
2. For control performance optimisation, intelligent optimisation methods such as GA and PSO can be used to dynamically adjust U-control parameters, thereby improving system response speed, overshoot, and steady-state accuracy, while enhancing dynamic decoupling capabilities and reducing coupling interference in multivariable systems.
3. It is recommended to integrate cutting-edge technologies to expand application scenarios, such as using digital twins technology to build a simulation platform for the virtual real interaction and to verify the effectiveness of control strategies in real-time; Or deploy lightweight U-control algorithm through edge computing to reduce communication delay of distributed system and improve real-time performance.
4. Attention should be paid to the scalability and complexity management of the system, such as developing a modular U-control framework that supports flexible configuration and rapid porting, enabling it to adapt to controlled objects of different sizes and complexities, while simplifying maintenance and upgrade processes.

4 Case studies: practical applications of U-I-control integration

The following gives two possible integration examples of how to realise the I-based U-control. Cars [36], robots [3], UAVs [21] and industry process control.

4.1 Example 1: Autonomous Systems Control

Control systems for autonomous systems with energy constraints [30].

4.1.1 Three-level Hybrid Control Architecture:

Given mixed data, one straightforward idea is to discretize all continuous variables, another idea is

to use the three-layer hybrid control architecture. The high layer (I-control) processes discrete and qualitative signals (e.g., voice commands, event triggers) and outputs high-layer decision signals (e.g., mode switching, trajectory adjustment). The middle layer converts discrete signals into continuous-compatible formats (e.g., zero-order hold or interpolation) and ensures that discrete signal updates align with the U-control sampling rate. It also employs intelligent methods (e.g., fuzzy logic) to quantify qualitative signals (e.g., "fast response") into continuous signals. The bottom layer (U-control) retains the original continuous or discrete design, with optional discretization. The decision to discretize depends on signal type and closed-loop performance.

II.High layer (I-control) design: One possible design approach involves using an LQR-based top layer (I-control) in conjunction with a U-control base layer, incorporating a time-varying Q/R design mechanism. While the bottom layer U-control retains the original dynamic inversion structure. This design is well-suited for the automatic control of autonomous systems [30] like electric vehicle control [37] and safe driving of autonomous vehicles [36].

1. For model-based U-control, the bottom model can be represented as:

$$\dot{x} = f(x, u, w) \quad (2)$$

where u is the control input, and $d(t)$ is the disturbance that comes from the outside environment

For system (2), propose the following optimisation problem subject to (2):

$$\min J(x, u, w) = \int_0^\infty (x(t)^T Q(t) x(t) + u(t)^T R(t) u(t)) dt \quad (3)$$

During peak hours, increase Q and decrease R to prioritize accuracy. During off-peak hours, decrease Q and increase R to prioritize energy saving.

2. For MF U-control implementations, Design composite energy function:

$$V_{MF} = x^T P x + \sigma^T \Lambda(t) \sigma \quad (4)$$

where P is the solution of the LQR Riccati equation, σ is the U-control sliding surface, Λ is the sliding mode gain matrix.

4.1.2 Incorporating constraints

1. Parameter Update Constraints: Limit Q/R variation rates:

$$\left\| \frac{dQ}{dt} \right\| = \gamma Q, \left\| \frac{dR}{dt} \right\| = \gamma R \quad (5)$$

2. Time-Scale Separation Condition:

$$\tau_{LQR} < \tau_{U-control} \quad (6)$$

where τ_{LQR} is the decision update period of LQR (e.g., 1–10 s) and $\tau_{U-control}$ is the dynamic inversion response time of U-control

3. Stability Condition Constraints

$$\dot{V} \leq -\lambda_{LQR} \|x\|^2 - \lambda_{U-control} \|\sigma\|^2 \quad (7)$$

where the decay rates λ_{LQR} and $\lambda_{U-control}$ must be coordinated

4. Hierarchical Cost Function Consistency:

$$\begin{aligned} J_{total} &= \int_0^\infty (x(t)^T Q(t)x(t) + u(t)^T R(t)u(t)) dt \\ &\approx J_{U-control}(e, u) \end{aligned} \quad (8)$$

To ensure U-control's output energy complies with real-time LQR weight $R(t)$, we have

$$\|u_{U-control}\|^2 \leq -\frac{R_{max}}{R(t)} \|x\|^2 \quad (9)$$

4.1.3 Intelligent Methods for UDI

1. For model-based U-control, the nonlinear system model is in general not exact, and the inversion of the inner loop is difficult to obtain, the inversion process is excessively intricate to be executed in its exact form. The NN can be induced to make an error compensation incorporated in the controller design.
2. For TMF U-control implementations, adaptive approaches like fuzzy logic, NN, or RL [35?] may serve as alternatives to MFSMC in the inner loop, thereby deriving the control law.

4.1.4 Evaluation & Experiments

We propose three metrics to evaluate the results in real production, collectively assessing a method's performance. Experiments should be conducted in Simulink/Matlab, evaluating both control

performance and energy efficiency under realistic industrial conditions. For example, step changes in energy prices to emulate real-time electricity markets, sudden load disturbances like a 20% torque overload in motor control, and nonlinear dynamics switching, for example, a UAV transitioning from hover to forward flight. Additionally, benchmark comparisons should be made against pure LQR control with fixed parameters and pure U-control without considering energy efficiency, to provide a more holistic understanding of the method's effectiveness and adaptability in various practical situations.

4.1.5 Extended Applications: From Energy Control to Safety-Critical Driving

Safe driving of autonomous vehicles [36] problem is a special type of example of autonomous systems like example 1, integrating U-control with HICS for safe autonomous driving: feasibility and methodology, like autonomous driving, path planning & decision-making and emergency manoeuvring.

The upper layer focuses on decision-making and RL optimisation, while the lower layer handles execution. U-control addresses the nonlinear vehicle dynamics, such as tyre friction and actuator saturation, ensuring tracking accuracy and safety.

1. Autonomous Driving takes lane deviation error, preceding vehicle distance, traffic flow state as input, desired speed and steering angle as output, RL learns optimal policies to balance fuel efficiency and safe following distance, while U-control ensures robust tracking performance by compensating for real-world nonlinearities. For Longitudinal Control: Throttle/brake via U-model inversion, for Lateral Control, the steering ensures the control accuracy via U-control sliding mode $\sigma = \dot{e} + \lambda e$ to reject road disturbances.
2. Path Planning and Decision-Making, RL handles complex traffic scenarios like unprotected left turns and pedestrian crossings, whereas U-control compensates for nonlinearities like understeering on low-friction roads, ensuring that the vehicle stays on course. Additionally, RL plans optimal evasive paths during critical situations, such as avoiding obstacles, while U-control guarantees stable tracking even when facing model uncertainties, like sudden braking on icy or slippery roads.

3. Emergency Manoeuvring, the strategy focuses on executing rapid and safe manoeuvres when confronted with unexpected situations, with RL handling the decision-making of the best evasive action, while U-control ensures that the vehicle's dynamics are accurately controlled, even under extreme conditions. One challenge is the co-training of RL and U-control, which can be addressed by using offline RL pre-training combined with online U-control fine-tuning to avoid instability. Another challenge is the conflict between multi-objective goals, such as safety and comfort, which can be resolved by embedding control barrier functions in U-control to constrain RL outputs.

4.2 Example 2: Industry Process Control

Using the example of "Hierarchical Intelligent Control of the Sintering Process" [38], we will now demonstrate the U-I control method. The sintering process is a crucial pre-treatment step in steel production, where low-grade iron ore is agglomerated into high-grade sinter through combustion. The key control parameters in this process are the burn-through point (BTP) and the vertical sintering speed (VSS). BTP is the most important heat state parameter, directly affecting the quality and quantity of the sinter, while VSS is a significant factor influencing BTP. The sintering process is highly complex, nonlinear, time-varying, and has significant time delays, making it difficult to measure BTP online directly. Traditional control methods often fail to meet the control requirements due to these challenges. Hierarchical intelligent control systems (HICS) and U-control are highly complementary in their core principles. The soft-sensing and fuzzy control capabilities of HICS can enhance the model adaptability of U-control, while the dynamic inversion and TMF robustness of U-control can address the limitations of HICS in terms of mechanistic model accuracy. The integration approaches can take the following two possible forms.

4.2.1 U-Control Substitution for HICS Lower-Layer

1. Lower-layer applied U-control to replace the DCS relies on PID, reformulate strand speed control as a U-model dynamic inversion problem $\dot{y} = f(y) + g(y)u$, where u comes from the upper-layer LQR/fuzzy control.
2. Use MFSMC to handle MF dynamics (e.g., variations in bed resistance). Use MFSMC to

handle model free dynamics (e.g., variations in bed resistance).

4.2.2 Hybrid Architecture (HICS + U-control)

1. Upper Layer (HICS): BTP soft sensing based on retains original algorithm. Dynamic adjustment of LQR weights $Q(t), R(t)$ (e.g., prioritize energy savings during high electricity prices).
2. Lower Layer: Model strand speed control as a U-model polynomial $y^{(n)} = \sum_{i=0}^n a_i(t)y^i$ and solve the inverse model in real-time using Newton-Raphson iteration.

There are many challenges to stabilities and Real-Time Requirements, like the compatibility between upper-layer LQR and lower-layer U-control Lyapunov functions. Deploy U-control on real-time controllers interfaced with DCS hardware.

5 Conclusion

This study presents the primary concept and configuration of a What-How intelligent control system, which is established with two layers of control, bottom control and coordination control. This WH-I-control provides a flexible and scalable open framework to integrate data-driven dynamic adaptation and knowledge-guided optimisation for problem-oriented, data-driven system operation. Accordingly, human expertise, scientific, engineering experience, and industrial results are effectively accumulated in the data and knowledge bases with proper classification, qualitative and quantitative assessment, and generalisation.

Data Availability Statement

Data will be made available on request.

Funding

This work was supported without any funding.

Conflicts of Interest

The authors declare no conflicts of interest.

Ethical Approval and Consent to Participate

Not applicable.

References

- [1] Zhu, Q., Zhang, W., Li, S., Chen, Q., Na, J., & Ding, H. (2025). U-control—a universal platform for

- control system design with inversion/cancellation of nonlinearity, dynamic and coupling through model-based to model-free procedures. *International Journal of Systems Science*, 56(3), 484-501. [Crossref]
- [2] Goodwin, T., Xu, J., Celik, N., & Chen, C. H. (2024). Real-time digital twin-based optimization with predictive simulation learning. *Journal of Simulation*, 18(1), 47-64. [Crossref]
- [3] Hussain, N. A. A., Ali, S. S. A., Ovinis, M., Arshad, M. R., & Al-Saggaf, U. M. (2019). Underactuated coupled nonlinear adaptive control synthesis using U-model for multivariable unmanned marine robotics. *IEEE Access*, 8, 1851-1865. [Crossref]
- [4] Bhattacharyya, S. P., Datta, A., & Keel, L. H. (2018). *Linear control theory: structure, robustness, and optimization*. CRC press. [Crossref]
- [5] Blum, C., & Roli, A. (2003). Metaheuristics in combinatorial optimization: Overview and conceptual comparison. *ACM computing surveys (CSUR)*, 35(3), 268-308. [Crossref]
- [6] Yang, X. S. (Ed.). (2015). *Recent advances in swarm intelligence and evolutionary computation* (p. 303). Switzerland: Springer International Publishing. [Crossref]
- [7] Kuhnle, A., Kaiser, J. P., Theiß, F., Stricker, N., & Lanza, G. (2021). Designing an adaptive production control system using reinforcement learning. *Journal of Intelligent Manufacturing*, 32, 855-876. [Crossref]
- [8] Dorigo, M., & Stützle, T. (2018). Ant colony optimization: overview and recent advances. *Handbook of metaheuristics*, 311-351. [Crossref]
- [9] Malhotra, R., Singh, N., & Singh, Y. (2011). Genetic algorithms: Concepts, design for optimization of process controllers. *Computer and information science*, 4(2), 39.
- [10] Das, S., & Suganthan, P. N. (2010). Differential evolution: A survey of the state-of-the-art. *IEEE transactions on evolutionary computation*, 15(1), 4-31. [Crossref]
- [11] Naeem, S., Ali, A., Anam, S., & Ahmed, M. M. (2023). An unsupervised machine learning algorithms: Comprehensive review. *International Journal of Computing and Digital Systems*. [Crossref]
- [12] Zhao, W., Queralta, J. P., & Westerlund, T. (2020, December). Sim-to-real transfer in deep reinforcement learning for robotics: a survey. In *2020 IEEE symposium series on computational intelligence (SSCI)* (pp. 737-744). IEEE. [Crossref]
- [13] Choi, W. H., & Kim, J. (2024). Unsupervised learning approach for anomaly detection in industrial control systems. *Applied System Innovation*, 7(2), 18. [Crossref]
- [14] Wang, R., Gao, L., Bai, C., & Sun, H. (2020). U-Model-Based Sliding Mode Controller Design for Quadrotor UAV Control Systems. *Mathematical Problems in Engineering*, 2020(1), 4343214. [Crossref]
- [15] Iqbal, R., Maniak, T., Doctor, F., & Karyotis, C. (2019). Fault detection and isolation in industrial processes using deep learning approaches. *IEEE Transactions on Industrial Informatics*, 15(5), 3077-3084. [Crossref]
- [16] Garaffa, L. C., Basso, M., Konzen, A. A., & de Freitas, E. P. (2021). Reinforcement learning for mobile robotics exploration: A survey. *IEEE Transactions on Neural Networks and Learning Systems*, 34(8), 3796-3810. [Crossref]
- [17] Gu, S., Holly, E., Lillicrap, T., & Levine, S. (2017, May). Deep reinforcement learning for robotic manipulation with asynchronous off-policy updates. In *2017 IEEE international conference on robotics and automation (ICRA)* (pp. 3389-3396). IEEE. [Crossref]
- [18] Xin, Q., Wu, G., Fang, W., Cao, J., & Ping, Y. (2021, October). Opportunities for reinforcement learning in industrial automation. In *2021 7th International Conference on Big Data and Information Analytics (BigDIA)* (pp. 496-504). IEEE. [Crossref]
- [19] Wen, T., Fang, Y., & Lu, B. (2022). Neural network-based adaptive sliding mode control for underactuated dual overhead cranes suffering from matched and unmatched disturbances. *Autonomous Intelligent Systems*, 2(1), 1. [Crossref]
- [20] Abdullah, F. M., Al-Ahmari, A. M., & Anwar, S. (2023). A hybrid fuzzy multi-criteria decision-making model for evaluating the influence of Industry 4.0 technologies on manufacturing strategies. *Machines*, 11(2), 310. [Crossref]
- [21] Refoufi, S., & Benmahammed, K. (2018). Control of a manipulator robot by neuro-fuzzy subsets form approach control optimized by the genetic algorithms. *ISA transactions*, 77, 133-145. [Crossref]
- [22] Chojacki, A., Ambroziak, A., & Borkowski, P. (2023). Fuzzy controllers instead of classical PID in HVAC equipment: Dusting off a well-known technology and Today's implementation for better energy efficiency and user comfort. *Energies*, 16(7), 2967. [Crossref]
- [23] Shetty, S. H., Shetty, S., Singh, C., & Rao, A. (2022). Supervised machine learning: algorithms and applications. *Fundamentals and methods of machine and deep learning: algorithms, tools and applications*, 1-16. [Crossref]
- [24] Baclawski, K., Chan, E. S., Gawlick, D., Ghoneimy, A., Gross, K., Liu, Z. H., & Zhang, X. (2017). Framework for ontology-driven decision making. *Applied Ontology*, 12(3-4), 245-273. [Crossref]
- [25] Grosan, C., Abraham, A., Jain, L. C., & Kacprzyk, J. (2011). *Intelligent systems* (Vol. 17, pp. 261-268). Berlin: Springer. [Crossref]
- [26] Yang, W., Wei, Y., Wei, H., Chen, Y., Huang, G., Li, X., ... & Kang, B. (2023). Survey on explainable AI: From approaches, limitations and applications aspects. *Human-Centric Intelligent Systems*, 3(3), 161-188. [Crossref]

- [27] Dridi, I., Hamza, A., & Ben Yahia, N. (2023). A new approach to controlling an active suspension system based on reinforcement learning. *Advances in Mechanical Engineering*, 15(6), 16878132231180480. [Crossref]
- [28] Lillicrap, T. P., Hunt, J. J., Pritzel, A., Heess, N., Erez, T., Tassa, Y., ... & Wierstra, D. (2015). Continuous control with deep reinforcement learning. *arXiv preprint arXiv:1509.02971*.
- [29] Zhu, Q. (2023). Model-free sliding mode enhanced proportional, integral, and derivative (SMPID) control. *Axioms*, 12(8), 721. [Crossref]
- [30] Vallon, C., Pustilnik, M., Pinto, A., & Borrelli, F. (2024). Learning hierarchical control systems for autonomous systems with energy constraints. *arXiv preprint arXiv:2403.14536*. [Crossref]
- [31] Farina, M., & Scattolini, R. (2019). Distributed MPC for large-scale systems. *Handbook of Model Predictive Control*, 239-258. [Crossref]
- [32] Yang, X., & Zhou, Y. (2024). Energy Management of Plug-In Hybrid Electric Vehicles for Autonomous Driving in a Following Environment Based on Fuzzy Adaptive PID Control. *IEEE Access*. [Crossref]
- [33] Chen, W. H. (2024). Goal-oriented control systems (gocs): From how to what. *IEEE/CAA Journal of Automatica Sinica*, 11(4), 816-819. [Crossref]
- [34] Liu, D., Xue, S., Zhao, B., Luo, B., & Wei, Q. (2020). Adaptive dynamic programming for control: A survey and recent advances. *IEEE Transactions on Systems, Man, and Cybernetics: Systems*, 51(1), 142-160. [Crossref]
- [35] Zhao, Y., Du, X., Xia, G., & Wu, L. (2015). A novel algorithm for wavelet neural networks with application to enhanced PID controller design. *Neurocomputing*, 158, 257-267. [Crossref]
- [36] Giernacki, W. (2022). Minimum energy control of quadrotor UAV: Synthesis and performance analysis of control system with neurobiologically inspired intelligent controller (BELBIC). *Energies*, 15(20), 7566. [Crossref]
- [37] Hou, Z., & Xiong, S. (2019). On model-free adaptive control and its stability analysis. *IEEE Transactions on Automatic Control*, 64(11), 4555-4569. [Crossref]
- [38] Wang, C. S., & Wu, M. (2011). Hierarchical intelligent control system and its application to the sintering process. *IEEE Transactions on Industrial Informatics*, 9(1), 190-197. [Crossref]
- [39] Gutiérrez-Escalona, J., Roncero-Clemente, C., Husev, O., Matiushkin, O., & Blaabjerg, F. (2024). Artificial Intelligence in the Hierarchical Control of ac, dc and Hybrid ac/dc Microgrids—A Review. *IEEE Access*. [Crossref]
- [40] He, F., Yang, R., Shi, L., & Huang, X. (2025). A decentralized framework for kernel PCA with projection consensus constraints. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. [Crossref]
- [41] Li, G., Li, Q., Yang, C., Su, Y., Yuan, Z., & Wu, X. (2023). The classification and new trends of shared control strategies in telerobotic systems: A survey. *IEEE Transactions on Haptics*, 16(2), 118-133. [Crossref]
- [42] Zhu, Q., Li, R., & Zhang, J. (2023). Model-free robust decoupling control of nonlinear nonaffine dynamic systems. *International Journal of Systems Science*, 54(13), 2590-2607. [Crossref]



Quanmin Zhu is Professor in control systems at the School of Engineering, University of the West of England, Bristol, UK. He obtained his MSc in Harbin Institute of Technology, China in 1983, PhD in Faculty of Engineering, University of Warwick, UK in 1990, and worked as a postdoctoral research associate at the Department of automatic control and systems engineering, University of Sheffield, UK between 1989-1994. His main research interest is in complex system modelling, identification, and control. He has published over 300 papers on these topics, edited various books with Springer, Elsevier, and the other publishers, and provided consultancy to various industries. Currently Professor Zhu is acting as Editor of Elsevier book series of Emerging Methodologies and Applications in Modelling, Identification and Control. (Email: quan.zhu@uwe.ac.uk)



Haihong Wang was born in 1974, Liaoning Province, China. She received her Ph.D. in 2007 from College of Information Science and Engineering, Ocean University of China. She took her current position as an associate professor at Qingdao University of Science and Technology in 2013. Her research interests include optimal control, control theory and its application, artificial intelligence in the control field. (Email: wanghaihong@qust.edu.cn)