



An Efficient Algorithm for Weather Forecasting Using Causal Graph Neural Network

Ahmad Ali^{1,2,*}, H. M. Yasir Naeem^{1,2}, Riaz Ali³, Mujtaba Asad⁴, Md Belal Bin Heyat⁵ and Tamam Alsarhan⁶

¹ College of Mechatronics and Control Engineering, Shenzhen University, Shenzhen 518060, China

² College of Computer Science and Software Engineering, Shenzhen University, Shenzhen 518060, China

³ Shenzhen Institute of Advanced Technology, Chinese Academy of Sciences, Shenzhen, China

⁴ Institute of Image Processing & Pattern Recognition, Department of Automation, Shanghai Jiao Tong University, Shanghai 200240, China

⁵ Department of Computer Science, Westlake University, Hangzhou 310024, China

⁶ King Abdullah II School of Information Technology, The University of Jordan, Amman, Jordan

Abstract

The rapid accumulation of large-scale, long-term meteorological data presents unprecedented opportunities for data-driven weather modeling and high-resolution atmospheric prediction. While various deep learning techniques-such as Long Short-Term Memory (LSTM), Recurrent Neural Networks (RNNs), and Graph Neural Networks (GNNs)-have been explored for weather forecasting, the complex spatial dependencies within historical meteorological data, particularly dynamic spatial correlations among distributed observation stations, remain insufficiently addressed. To tackle this challenge, we propose a Dynamic Spatio-Temporal Fusion Graph Network (DSTFGN), a novel framework that integrates multivariate time-series analysis with graph-based causal inference to capture

intricate and time-varying interdependencies among weather variables across meteorological observation networks. The DSTFGN module fuses real-time inputs (e.g., sensor data, live weather feeds, satellite observations) with historical records to model the propagation of atmospheric disturbances-such as storm systems, pressure fronts, or humidity anomalies-through the meteorological observation network. By effectively capturing dynamic spatial-temporal interactions among weather stations, our approach significantly enhances forecasting accuracy and supports adaptive meteorological monitoring strategies. Experimental evaluations on two real-world meteorological datasets demonstrate that DSTFGN consistently outperforms existing baseline models across short-term, medium-term, and long-term forecasting horizons, achieving improvements of up to 10.58% in temperature forecasting and 8.88% in humidity forecasting over the best competing baseline.



Submitted: 26 March 2025

Accepted: 09 July 2025

Published: 28 October 2025

Vol. 1, No. 4, 2025.

10.62762/TACS.2025.619794

*Corresponding author:

✉ Ahmad Ali

ahmadali@szu.edu.cn

Citation

Ali, A., Naeem, H. M. Y., Ali, R., Asad, M., Heyat, M. B. B., & Alsarhan, T. (2025). An Efficient Algorithm for Weather Forecasting Using Causal Graph Neural Network. *ICCK Transactions on Advanced Computing and Systems*, 1(4), 258–274.



© 2025 by the Authors. Published by Institute of Central Computation and Knowledge. This is an open access article under the CC BY license (<https://creativecommons.org/licenses/by/4.0/>).

Keywords: weather forecasting, causal graph learning, spatio-temporal graph neural network, attention mechanism, meteorological prediction.

1 Introduction

Accurate weather forecasting has emerged as a critical area of research with profound implications for human safety, agricultural productivity, energy management, and disaster preparedness. The rapid accumulation of large-scale meteorological sensor data and the growing complexity of atmospheric dynamics have intensified the demand for reliable, high-resolution weather predictions [1, 2]. Accurate weather forecasting—particularly at fine spatial and temporal scales—is essential, as it directly influences early warning systems, infrastructure resilience, and climate adaptation strategies. However, achieving reliable predictions remains a significant challenge due to the inherent spatio-temporal complexity of atmospheric systems and the dynamic, non-linear interactions among meteorological variables across observation stations.

Researchers have increasingly focused on time-series and spatial correlation analysis techniques to tackle the challenges of weather forecasting, particularly in capturing the spatio-temporal dependencies among distributed meteorological observation stations. Early approaches primarily relied on statistical time-series models to extract temporal patterns, such as the Autoregressive Integrated Moving Average (ARIMA) model, which has been widely applied to both short-term and long-term rainfall forecasting [3]. Subsequently, Convolutional Neural Networks (CNNs) were introduced to model spatial correlations in gridded meteorological data for global weather prediction [5], and graph-based spatio-temporal attention mechanisms have further improved weather prediction accuracy by adaptively capturing node-level spatial dependencies among meteorological stations [6]. However, these CNN-based methods are limited to Euclidean space representations and struggle to accurately model the irregular and non-Euclidean structure of transportation networks. To better represent the complex topology of road networks, Graph Neural Networks (GNNs) have gained traction as a more flexible and powerful framework for capturing intricate spatial relationships in meteorological data [7–10], with recent surveys confirming their broad applicability across forecasting, classification, and anomaly detection tasks in time-series domains [4]. GNNs enable more accurate

modeling of interactions between road segments, making them highly suitable for weather forecasting in urban transportation systems.

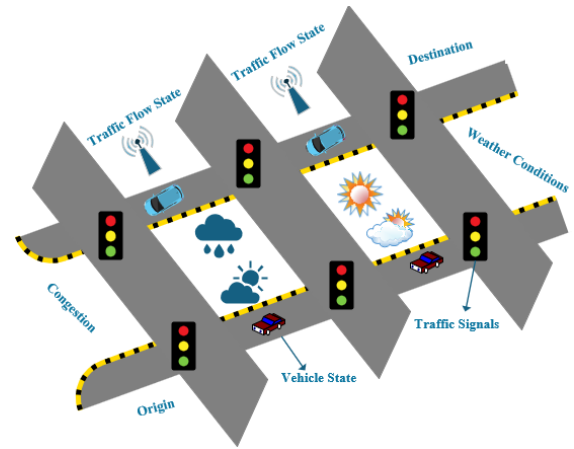


Figure 1. Weather propagation across a meteorological sensor network and its spatio-temporal influence patterns.

Although Graph Neural Network (GNN)-based approaches have shown promising predictive performance in weather forecasting, several key challenges remain. One major challenge is dynamic spatial dependence: meteorological systems are subject to sudden and inherent changes driven by factors such as moving pressure systems, frontal boundaries, sea surface temperature anomalies, and topographic effects. These changes can alter the spatial correlation structure among observation stations and subsequently affect atmospheric conditions at neighboring nodes with varying time delays, making static graph representations insufficient for capturing the true dynamics of weather propagation. For example, Figure 1 illustrates the propagation of weather phenomena (e.g., heavy rain, fog) across a meteorological sensor network, depicting a directed graph where nodes represent weather monitoring stations and edges represent causal influence pathways between stations, with arrows indicating the direction of atmospheric propagation. Adverse weather conditions, such as heavy rain at Station A and fog at Station C, propagate across the network, leading to correlated atmospheric disturbances at downstream stations with measurable time delays. Additionally, geographic constraints—such as terrain elevation and coastline proximity—further shape these dynamics by channeling atmospheric flows and amplifying local weather anomalies. Effectively modeling this complex causality requires an advanced framework capable of capturing dynamic spatio-temporal interactions, highlighting the need for a more adaptive and context-aware forecasting approach.

The need to more accurately capture the intricate and dynamic nature of weather within urban transportation networks has motivated the development of this approach. Traditional forecasting methods often fall short in modeling the complex interplay between spatial and temporal factors that influence regional weather patterns. Meteorological systems are highly susceptible to abrupt and unpredictable atmospheric events—such as sudden pressure drops, rapidly evolving storm systems, and cascading humidity anomalies—that introduce non-trivial spatio-temporal dependencies among observation stations. To address these challenges, we propose an integrated framework that combines gated dilated convolutions, spatio-temporal attention mechanisms, and a fusion graph learning module. The spatio-temporal attention mechanism selectively emphasizes the most critical temporal and spatial variations in meteorological signals, while the fusion graph learning module captures fine-grained causal interactions among weather observation nodes. Together, these components enable the model to represent and learn complex, dynamic relationships across the observation network. This approach provides a more robust and accurate framework for weather forecasting, which is essential for improving real-time decision-making in agriculture, energy management, and disaster early warning systems. The major contributions of our work are as follows:

- We propose DSTFGN, a novel model that combines multivariate time-series analysis with graph-based causal inference to improve weather forecasting. Unlike traditional methods, DSTFGN captures both dynamic spatial correlations and temporal causality using adaptive graph learning, Granger causality, and spatio-temporal attention. This allows the model to adapt to real-time changes and accurately predict future weather conditions.
- Existing methods like RNNs and LSTMs focus on temporal correlations but lack causal understanding. We propose a causal graph learning framework using Granger causality to capture directionality and latency in weather propagation. This enhances DSTFGN accuracy and interpretability over traditional correlation-based models.
- We evaluate DSTFGN on two real-world weather datasets, where it outperforms ten state-of-the-art baselines across MAE, MAPE, and RMSE. The

model excels at capturing long-term temporal dependencies and dynamic spatial correlations. It also maintains low computational cost, making it ideal for real-time forecasting.

The rest of the paper is organized as follows: In Section 2, we outline and model the problem statement. The GCN model and the proposed DSTFGN method are discussed in more depth in Section 3. Section 4 contains a discussion of extensive experiments and comparisons. A detailed literature is provided in Section 6. Finally, Section 7 concludes this work.

2 Problem Formulation

In this section, we formally present the weather forecasting problem and provide a mathematical explanation of the weather network concept.

- **Dynamic Spatial Dependencies:** Meteorological networks are influenced by a variety of dynamic atmospheric factors, such as moving pressure systems, frontal boundaries, and sudden changes in wind direction. These factors can alter the spatial correlation structure among observation stations, leading to complex and time-varying interactions between nodes. Traditional GNNs often rely on static adjacency matrices, which fail to capture these dynamic spatial dependencies, resulting in suboptimal predictions.
- **Temporal Causality:** Weather patterns exhibit strong temporal causality, where changes in one node can propagate to downstream nodes with a time delay. Existing methods, such as RNNs and Long Short-Term Memory (LSTM) networks, primarily focus on capturing temporal correlations rather than causal relationships. This can lead to incorrect dependencies, as correlations do not necessarily imply causation. For example, a sudden drop in temperature at one location may cause a delayed response in humidity levels at a downstream location, which is not adequately captured by correlation-based models.
- **Heterogeneity in Spatio-Temporal Data:** Weather data is inherently heterogeneous, with different nodes exhibiting varying patterns of temporal and spatial influence. Some nodes may be more influenced by their historical data, while others may be more affected by interactions with neighboring nodes. Existing methods often treat all nodes uniformly, failing to account for this heterogeneity, which can lead to inaccurate forecasts.

We represent the urban weather network as a directed graph $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathbf{A})$, where $\mathcal{V} = \{v_1, v_2, \dots, v_N\}$ denotes the set of meteorological observation station nodes distributed across the weather monitoring network, with N representing the total number of nodes. $\mathcal{E}$ represents the set of edges connecting these nodes. The adjacency matrix $\mathbf{A} \in \mathbb{R}^{N \times N}$ encodes the relationships or proximities between each pair of nodes.

Historical weather signal data can be represented as a weather map feature vector $\mathcal{Y} \in \mathbb{R}^{T \times N \times D}$, where D denotes the feature dimension (e.g., temperature, humidity, pressure). The historical graph signal at time t is expressed as $\mathcal{Y}_t \in \mathbb{R}^{N \times D}$.

The weather forecasting problem is framed as follows: based on the graph $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathbf{A})$ and the historical weather graph signals $\mathcal{Y}_{(t-T):t}$ over T time steps, the goal is to predict weather signals for the next P time steps by constructing a model $f(\cdot)$. Specifically, we have:

$$[\mathcal{Y}_{(t-T):t}, \mathcal{G}] f(\cdot) \rightarrow \hat{\mathcal{Z}}_{t,(t+P)}, \quad (1)$$

where $\mathcal{Y}_{(t-T):t} = (\mathcal{Y}_{t-T+1}, \mathcal{Y}_{t-T+2}, \dots, \mathcal{Y}_t) \in \mathbb{R}^{T \times N \times D}$ and $\hat{\mathcal{Z}}_{t,(t+P)} = (\hat{\mathcal{Z}}_{t+1}, \hat{\mathcal{Z}}_{t+2}, \dots, \hat{\mathcal{Z}}_{t+P}) \in \mathbb{R}^{P \times N \times D}$.

We define the weather forecasting task as follows: given a graph $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathbf{A})$ and historical weather signals $\mathcal{Y}_{(t-\Delta T):t}$ over ΔT time steps, predict future weather signals for the next ΔP time steps by learning the function $g(\cdot)$. This is mathematically represented as:

$$[\mathcal{Y}_{(t-\Delta T):t}, \mathcal{G}] g(\cdot) \rightarrow \hat{\mathcal{Z}}_{t,(t+\Delta P)}, \quad (2)$$

where $\mathcal{Y}_{(t-\Delta T):t} = (\mathcal{Y}_{t-\Delta T+1}, \mathcal{Y}_{t-\Delta T+2}, \dots, \mathcal{Y}_t) \in \mathbb{R}^{\Delta T \times N \times D}$ and $\hat{\mathcal{Z}}_{t,(t+\Delta P)} = (\hat{\mathcal{Z}}_{t+1}, \hat{\mathcal{Z}}_{t+2}, \dots, \hat{\mathcal{Z}}_{t+\Delta P}) \in \mathbb{R}^{\Delta P \times N \times D}$.

3 Model Framework

In this section, we provide a detailed description of the spatio-temporal causal fusion graph neural network, as illustrated in Figure 2.

3.1 Modeling Temporal Correlation Module

RNN-based methods have generally been used to capture temporal correlations in earlier weather forecasting research. However, these techniques often face challenges such as gradient explosion when modeling long-term temporal dependencies

and significant computational costs due to repetitive processing. In contrast, CNN-based approaches offer advantages such as gradient stability, parallel processing, and simpler model architectures. This research adopts an extended temporal convolution technique, to address these challenges. By increasing the depth of convolutional layers and gradually expanding the receptive field, this approach enhances the model's ability to capture long-range temporal correlations, which is crucial for accurate weather forecasting. This strategy reduces processing costs by enabling the temporal convolution to identify long-term dependencies in weather sequences with fewer layers. Moreover, non-recursive methods allow for parallel processing, further decreasing operational costs and temporal complexity. To improve the handling of sequential data, we also incorporate a gating mechanism to regulate the flow of information into the spatio-temporal convolution. The temporal gated convolutional network (TGCN) is defined as follows:

$$Z_l^T = \tanh(W_{a,l} * Z_{l-1}^{out} + b_1) \odot \sigma(W_{b,l} * Z_{l-1}^{out} + b_2) \quad (3)$$

$$Z_l^{out} = \text{GRU}(Z_l^T, Z_{l-1}^{out}) \quad (4)$$

$$Y = \sum_{l=1}^L Z_l^T \quad (5)$$

where $Z_l^T \in \mathbb{R}^{T \times N \times D}$ denotes the output of the l -th layer of the Gated Temporal Convolutional Network (GatedTCN), where T is the number of time steps, N is the number of nodes, and D is the feature dimension. $W_{a,l}$ and $W_{b,l}$ are the learnable parameters at layer l , while b_1 and b_2 are the bias terms. The symbols a and b represent filters and gates, respectively. The symbol $\odot$ denotes the Hadamard product, and $*$ represents the convolution operator. Finally, $\sigma(\cdot)$ is the sigmoid activation function.

3.2 Spatio-Temporal Fusion Graph Learning

The integrated Spatio-Temporal Fusion Graph Learning (STFGL) is designed to capture the complex spatial correlations and causal dependencies between nodes. The STFGL consists of three sub-modules: the causal graph learning, the adaptive graph learning, and the spatial gated fusion module. The outputs from the adaptive graph learning module and causal

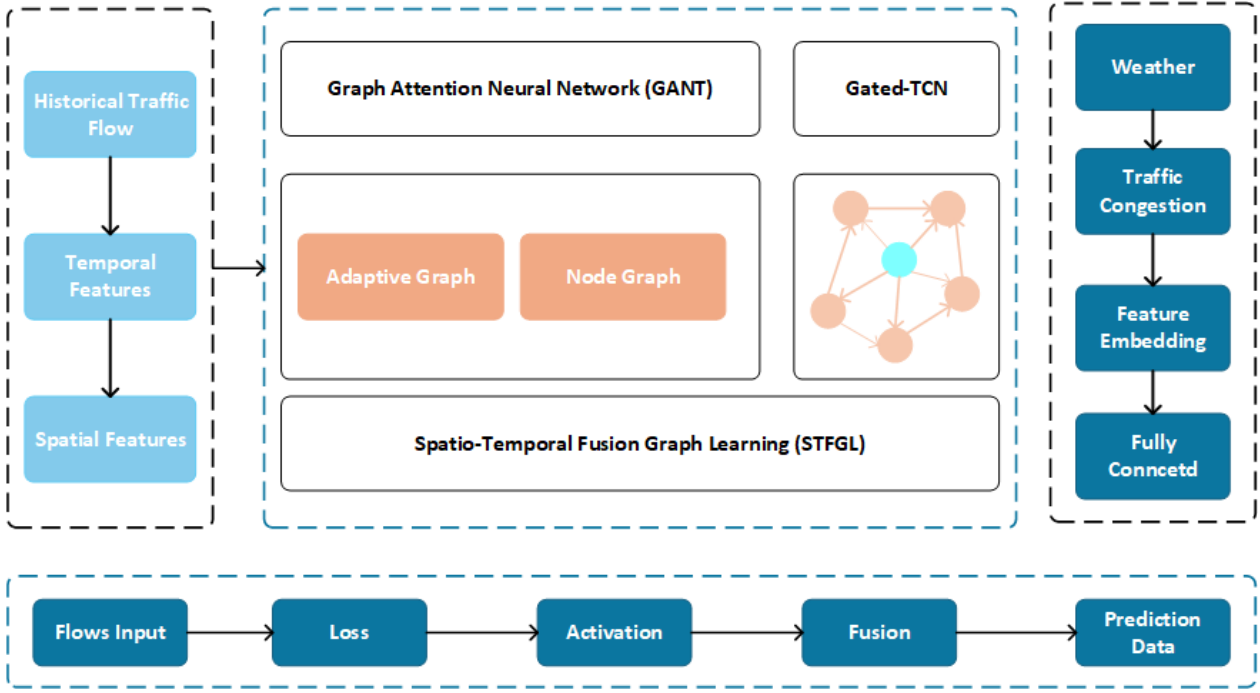


Figure 2. Framework of the proposed DSTFGN model.

graph learning at the l -th layer are represented as Z_l^{AG} and Z_l^{CG} , respectively. Following the spatial gating fusion process, the final output of the l -th layer from the STFGL is denoted as Z_l^{SG} .

In a meteorological observation network, weather conditions at each station node are influenced by atmospheric signals from neighboring stations, leading to causal interactions between weather patterns across different geographic locations. Specifically, changes in weather at upstream stations—such as temperature drops or pressure anomalies—can propagate to downstream stations with measurable time delays, potentially triggering cascading atmospheric events. To accurately capture and quantify these causal relationships in weather forecasting, we propose a novel causal graph learning framework based on **Granger Causality Analysis (GCA)**. In statistics, the Granger causality test [11] is used to detect causal relationships between climate variables, having been successfully applied to identify teleconnections and seasonal precipitation responses to sea surface temperature patterns in meteorological time series.

Specifically, we construct two regression models: the partial model Z_p and the full model Z_f , which predict the time series values y_i and y_j , respectively. The primary difference between the two models is that the full model includes the historical data from both time series y_i and y_j , whereas the partial model only incorporates the historical data of y_j to predict $y_j(t)$

($t = 1, 2, \dots, T$). The regression models are defined as follows:

$$Z_f = \alpha_0 + \sum_{i=1}^T \alpha_i \cdot y_i(t) + \epsilon_f(t) \quad (6)$$

$$Z_p = \gamma_0 + \sum_{j=1}^T \gamma_j \cdot y_j(t) + \epsilon_p(t) \quad (7)$$

where Z_f represent the output of the full regression model, Z_p denotes the partial regression model, y_i, y_j represent the weather data at nodes i and j , while T denote total number of time steps.

Next, by comparing the prediction errors of the two models ($\mathcal{E}_p, \mathcal{E}_f$), we evaluate the impact of the historical data of variable a_i on the prediction of variable a_j . According to the Granger causality hypothesis, if the lagged values of variable a_i help predict the future values of variable a_j , then a_i is considered the Granger cause of a_j . We employ the F-distribution to test the statistical significance of causal relationships between pairs of nodes as follows:

$$\mathcal{F} = \frac{(Q_p - Q_f)}{(\nu_f - \nu_p)} \cdot \frac{Q_f}{(T - \nu_f - 1)} \quad (8)$$

where the variables Q_p and Q_f represent the degrees of freedom for the regression parameters in the two models, which define the number of parameters in each model.

To reduce the time consumption of the Granger causality test while preserving the temporal characteristics of the raw weather data, this study employs K-means clustering for preprocessing. We use the raw weather data, after clustering, to perform the Granger causality test and construct the causal adjacency matrix A_G , which is represented as follows:

$$A_G = \begin{cases} 1, & \text{if } p < \text{sig} \\ 0, & \text{otherwise.} \end{cases} \quad (9)$$

where p denotes the p-value obtained from the Granger causality test, which is used to determine whether the null hypothesis in the hypothesis test can be rejected. Additionally, sig represents the significance threshold.

In this study, we employ the causal adjacency matrix A_G as a prior graph structure to guide the Graph Attention Neural Network (GANT) in effectively utilizing causal insights and identifying critical relationships between nodes. Additionally, we incorporate a multi-head attention mechanism to capture dependencies between nodes from different subspaces. This approach enhances the model expressive power by enabling parallel computation, which significantly reduces temporal complexity. The process is outlined as follows:

$$\alpha_{ij} = \frac{\exp(\text{LeakyReLU}(\mathbf{a}^T[\mathbf{h}_i, \mathbf{h}_j]))}{\sum_{k \in N_i} \exp(\text{LeakyReLU}(\mathbf{a}^T[\mathbf{h}_i, \mathbf{h}_k]))}, \quad (10)$$

$$\tilde{\mathbf{h}}_i = \sigma \left(\frac{1}{K} \sum_{k=1}^K \sum_{j \in N_i} \alpha_{ij}^k \mathbf{h}_j^k \right), \quad (11)$$

where $\mathbf{h}_i$ and $\mathbf{h}_j$ represent the feature vectors of nodes i and j , $\mathbf{a}$ is the learnable attention vector, N_i denotes the neighbors of node i , $\text{LeakyReLU}(\cdot)$ is the Leaky ReLU activation function, K is the number of attention heads, α_{ij}^k is the attention coefficient from the k -th attention head, $\mathbf{h}_j^k$ is the feature vector of node j from the k -th attention head, $\sigma(\cdot)$ is a non-linear activation function (such as ReLU or sigmoid).

The weather states of different meteorological station nodes exhibit significant dynamic interconnections in the spatial dimension, which are crucial for understanding the evolution of atmospheric conditions and making accurate predictions. However, traditional graph neural network methods typically rely on a predefined adjacency matrix based on

geographic distance computation. While this matrix can represent the proximity relationships between stations, it often overlooks the complex and dynamically evolving atmospheric dependencies present in the node observations. We propose a node-adaptive learning mechanism designed to thoroughly investigate potential associations among weather stations at a fine-grained level. Specifically, instead of relying on a fixed graph structure, this mechanism dynamically adjusts and optimizes the connection weights between stations based on their individual meteorological measurements (e.g., temperature, humidity, pressure, wind speed, etc.) and their time-varying interactions. Through this process, we generate an adaptive adjacency matrix $\tilde{A}_{adm}$, which more accurately reflects the real-time and dynamic spatial dependencies between nodes.

$$A_{adm} = \text{softmax}(\text{ReLU}(\mathbf{Z}_1 \cdot \mathbf{Z}_2^T)) \quad (12)$$

where $\mathbf{Z}_1 \in \mathbb{R}^{N \times d}$ represents the embedding matrix for the source nodes, while $\mathbf{Z}_2$ corresponds to the embedding matrix for the target nodes. The spatial dependency weights between these nodes are obtained by computing the product of $\mathbf{Z}_1$ and $\mathbf{Z}_2$. The activation function used is ReLU, and softmax is applied for normalization.

We employ the GCN method to perform feature aggregation on adaptive graphs. The graph convolution process can be accurately approximated in the spectral domain using the expansion of the first-degree Chebyshev polynomial [8], and this approximation can also be applied to GCNs in high-dimensional meteorological forecasting settings. Therefore, our graph convolutional network can be represented as follows:

$$\mathbf{H}^{l+1} = (\mathbf{I}_N + \tilde{\mathbf{A}}_{adm}) \mathbf{H}^l \Theta \quad (13)$$

where $\mathbf{H}^{l+1}$ represent feature matrix, $\mathbf{I} - N$ denotes the identity matrix of size N , while A_{adm} represent the adjacency matrix.

To select important spatial features more effectively and enhance the model expressiveness, we employ a spatially gated fusion mechanism to integrate two input values, $\mathbf{H}_{AG}^l$ and $\mathbf{H}_{CG}^l$, which are the outputs of the AGL and CGL modules in the l -th layer, respectively. The spatially gated fusion mechanism

is represented as follows:

$$\mathbf{H}_S^l = \sigma(\mathbf{G}^l) \odot \mathbf{H}_{AG}^l + (1 - \sigma(\mathbf{G}^l)) \odot \mathbf{H}_{CG}^l \quad (14)$$

$$\mathbf{H}_S^{l+1} = \text{LayerNorm} \left(\sum_{k=1}^K \mathbf{W}_k (\mathbf{H}_{AG}^l \odot \alpha_k + (1 - \alpha_k) \odot \mathbf{H}_{CG}^l) \right) + \mathbf{B}_S \quad (15)$$

where $\mathbf{H}_S^{l+1}$ represent the updated feature matrix at next layer, $\mathbf{H}_{AG}^l$ denotes output feature matrix from the adaptive graph learning, K represent the number of attention heads, while $\mathbf{H}_{CG}^l$ represent the output feature matrix from the convolutional graph learning.

3.3 Attention-Based Spatio-Temporal Module

In weather forecasting, we observe significant variations in how different meteorological station nodes are affected by atmospheric processes across both the temporal and spatial domains. Specifically, some stations may be more influenced by their own historical weather patterns—due to local topographic effects—while others may be more dominated by interactions with neighboring stations reflecting large-scale atmospheric circulation. To more accurately capture the unique temporal and spatial change patterns at each station node, we designed an Attention-Based Spatio-Temporal (ABST) module. As shown in Figure 3, the overall structure of the ABST fully considers the individualized characteristics of each station node, enabling the model to capture spatio-temporal adaptive trends with high precision at the node level. This allows for more accurate forecasting of meteorological variables across the observation network. Additionally, we employ the same graph node embedding method in both HGLM and ABST to ensure consistency in modeling the weather-related interactions across nodes.

To obtain the graph node query vector $\mathbf{Y} = \mathbf{W}_Y \mathbf{Z}_G$, we first apply a linear transformation to the graph node embeddings through full connectivity. The weight matrix $\mathbf{W}_Y \in \mathbb{R}^{d \times D}$, and the query vector $\mathbf{Q} \in \mathbb{R}^{N \times D}$. Next, the output of the gated temporal convolution network (TCN) $\mathbf{H}_T^l$ is transformed using the formula $\mathbf{K}_T^l = \mathbf{H}_T^l \mathbf{W}_{k_t}$, where $\mathbf{W}_{k_t} \in \mathbb{R}^{D \times D}$ is the weight matrix that projects the output $\mathbf{H}_T^l$ from the gated TCN into a D -dimensional space, obtaining the node's key in the time dimension. Similarly, the spatial dimension key values $\mathbf{W}_{k_s} \in \mathbb{R}^{D \times D}$ are obtained by performing a linear transformation on $\mathbf{K}_S^l = \mathbf{W}_{k_s} \mathbf{H}_S^l$, where $\mathbf{H}_S^l$

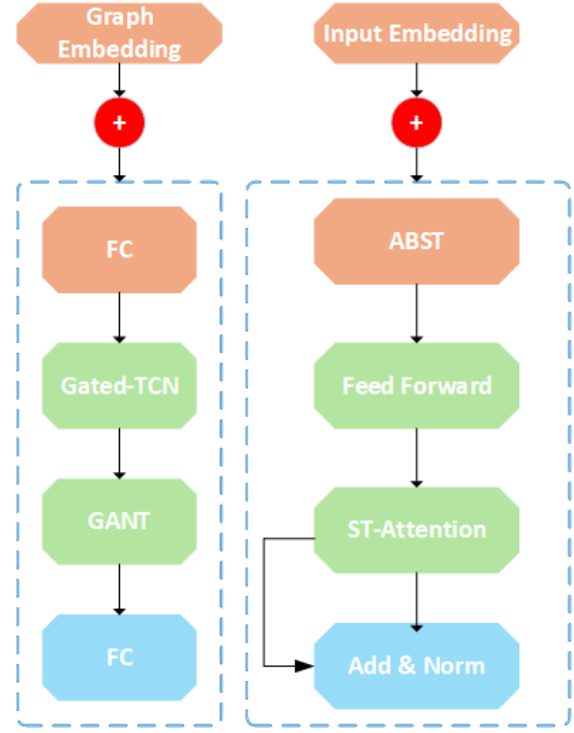


Figure 3. Spatio-temporal attention module.

is the output of the HGLM. We then compute their attention scores as follows:

$$\mathbf{X}_T^l = \frac{\exp(\mathbf{X}_T^l)}{\sum_{r \in \{T, S\}} \exp(\mathbf{X}_r^l)} \quad (16)$$

$$\mathbf{X}_S^l = \frac{\exp(\mathbf{X}_S^l)}{\sum_{r \in \{T, S\}} \exp(\mathbf{X}_r^l)} \quad (17)$$

$$\mathbf{H}^l = \mathbf{A}_S^l \cdot \mathbf{H}_S^l + \mathbf{A}_T^l \cdot \mathbf{H}_T^l \quad (18)$$

where $\mathbf{X}_T^l \in \mathbb{R}^{T \times N \times 1}$ and $\mathbf{X}_S^l \in \mathbb{R}^{T \times N \times 1}$ represent the attention scores of nodes in the spatio-temporal dimensions, respectively. Both the output of the l -th layer model and the output of ABST are denoted as $\mathbf{H}^l \in \mathbb{R}^{T \times N \times d}$, where d is the dimensionality of the feature space.

3.4 Output Layer

To directly connect the output of each layer module to the output layer, we employ skip connections. The stacking of model layers expands the temporal receptive field of the DSTFGN. Higher-layer blocks capture long-term temporal weather information, while lower-layer blocks focus on temporally adjacent aspects. Skip connections are utilized to manage spatial dependencies at various time scales. The outputs of each layer in our model, denoted as $\mathbf{H}_{\text{out}} \in$

$\mathbb{R}^{T \times N \times D}$, are combined through summation after applying the skip connections. Additionally, we apply dimension-specific linear transformations to the output sequence using two fully connected layers as the output layers. The output layer is structured as follows:

$$\mathbf{Z} = \text{ReLU}(\mathbf{X}_{\text{out}}W_a + b_a) \cdot W_b + b_b \quad (19)$$

where the variables $W_1 \in \mathbb{R}^{(T \times D) \times C}$ and $W_2 \in \mathbb{R}^{C \times (M \times F)}$ represent the weight matrices. b_1 and b_2 are the bias terms. The output of the entire model is $\mathbf{Z}$.

We use the mean absolute error (MAE) as the training objective to minimize the prediction loss. This metric evaluates the difference between predicted and actual values, and is optimized via back-propagation using the following equation:

$$\text{loss} = \frac{1}{N} \sum_{i=1}^N |Y_i - \hat{Y}_i| \quad (20)$$

where the term Y_i represents the ground truth, while $\hat{Y}_i$ denotes the value predicted by our model.

3.5 Training Process of the DSTFGN model

The training procedure for DSTFGN is described in Algorithm 1. Back-propagation is used to randomly initialize and optimize the trainable parameters of the DSTFGN model. We apply a stochastic gradient descent method to minimize the model loss function through back-propagation. Furthermore, the dropout technique is incorporated to enhance the efficiency and overall performance of the proposed approach.

4 Experiment

We evaluated the performance of our DSTFGN model using real-world weather network data obtained from Kaggle. This dataset includes weather data from 30 regions across the United States and Canada, covering various parameters such as temperature, humidity, and atmospheric pressure, with a sampling frequency of one hour. As a result, there are 24 data samples per day for each region. To standardize the input data, we applied Z-score normalization. In our experiments, we used 48 hours of historical data to predict the next 24 hours, meaning we leveraged the past 48 time steps to forecast the next 24 time steps. Specifically, we used humidity and temperature as the primary features to assess the model performance. The training set consisted of data from July to August 2017, while the

Algorithm 1: Training the DSTFGN Model

Input: Training data $\mathbf{X}$, labels $\mathbf{Y}$, learning rate η , epochs E , batches B , dropout rate p

Output: Optimized parameters θ

Initialize θ randomly;

for $epoch = 1$ **to** E **do**

for $batch = 1$ **to** B **do**

Forward pass:

$\hat{\mathbf{Y}} = \text{ReLU}(\mathbf{H}_{\text{out}}W_1 + b_1)W_2 + b_2$;

Apply dropout with rate p ;

Loss: $\text{loss} = \frac{1}{N} \sum_{i=1}^N |\mathbf{Y}_i - \hat{\mathbf{Y}}_i|$;

Back-propagation: Compute gradients ∇_{θ} of the loss;

Update: $\theta \leftarrow \theta - \eta \nabla_{\theta} \text{loss}$;

end

end

return Optimized θ

test set was derived from data from September 2017. The details of the datasets are presented in Table 1. Table 2 provides the system specifications used in our experiments.

Table 1. Dataset details for DSTFGN evaluation.

Information	Details
Source	Kaggle
Regions	30 (US and Canada)
Parameters	Temperature, Humidity, Pressure
Sampling	1 hour (24 samples/day)
Normalization	Z-score
Training	July-Aug 2017
Testing	Sept 2017
Features	Humidity, Temperature
Prediction	48 hours history, 24 hours forecast

We use three widely recognized evaluation metrics root mean square error (RMSE), mean absolute error (MAE), and mean absolute percentage error (MAPE) to assess the model performance. The formulas for these metrics are provided below:

$$\text{MAPE} = \frac{1}{T} \sum_{t=1}^T \left| \frac{y_t - \hat{y}_t}{y_t} \right| \quad (21)$$

$$\text{MAE} = \frac{1}{T} \sum_{t=1}^T |y_t - \hat{y}_t| \quad (22)$$

$$\text{RMSE} = \sqrt{\frac{1}{T} \sum_{t=1}^T (y_t - \hat{y}_t)^2} \quad (23)$$

where T represents the observed sample index, and we have set $T = 12$ for our experiment.

Table 2. System specifications.

Component	Specification
CPU	8x Intel Xeon E5-2680 v4 @ 3.80GHz
CUDA	12.0
cuDNN	8.0
RAM	512 GB
GPU	4x NVIDIA Tesla P100

4.1 Baselines Comparison

To conduct a comparative analysis of the proposed model, we incorporated the following state-of-the-art baseline methods into the evaluation.

- **FC-LSTM [12]:** A sequence-to-sequence model based on hybrid LSTM global and local encoders for meteorological factors forecasting, which leverages encoder-decoder architecture to capture both short-term and long-term dependencies in weather time series including temperature and relative humidity.
- **RNN-MT [13]:** This model employs recurrent neural networks with multivariate inputs to capture temporal dependencies in meteorological time series, serving as a strong sequential baseline for temperature and weather variable prediction.
- **Transformer [14]:** Due to its impressive sequence modeling ability, the Transformer can also be applied to time series forecasting tasks. By utilizing self-attention mechanisms and positional encoding, the Transformer effectively captures long-range dependencies in time series, resulting in outstanding performance in time series prediction.
- **ST-GDN [15]:** Spatio-temporal graph deep neural network that models spatial correlations among meteorological stations as graph edges and captures temporal evolution of wind speed through deep neural layers, demonstrating that graph-structured spatial dependencies significantly improve short-term wind speed and weather variable prediction accuracy.
- **DMFGNet:** The objective of the proposed DMFGNet model is to capture dynamic spatio-temporal relationships between different regions.
- **FG-Weather [16]:** This model employs fine-grained deep learning with attention mechanisms to capture dynamic temporal and spatial variations in meteorological variables across different weather stations, achieving effective multi-step weather variable prediction.
- **STCNet [17]:** This model employs hybrid spatio-temporal convolutions for post-processing of local numerical weather predictions, capturing both spatial distribution characteristics and temporal evolution of atmospheric states to improve forecast accuracy.
- **Adaptive-DL [18]:** This model employs adaptive deep learning architectures with dynamic spatial-temporal awareness to replace static graph structures in conventional meteorological forecasting, capturing evolving atmospheric dependencies across observation stations.
- **STGSA [19]:** This model employs spatial-temporal graph attention networks with a novel adjacency matrix to capture both local and long-range meteorological dependencies for precise weather forecasting.
- **ConvLSTM [20]:** This model employs convolutional LSTM networks to jointly capture spatio-temporal patterns in precipitation and meteorological variable sequences, serving as a strong convolutional recurrent baseline for short-term weather forecasting tasks.
- **DSTFGN:** This study proposes a model that combines multivariate time-series analysis and graph-based causal graph inference to reveal complex spatio-temporal interdependencies among weather patterns across distributed meteorological stations.

4.2 Hyper-parameters Settings

The *PyCharm* packages (version 3.1.0) are implemented using the *Keras* library. Moreover, all convolutions, fully connected layers are initialized using the Xavier initialization. We also used batch normalization and selected 64 as the mini-batch size. There is a fixed learning rate (LR) of 0.001. To lessen the issue of overfitting, the dropout rate is set at 0.25. To enhance the optimization of the proposed method, we employ the renowned Adam optimization technique to minimize the Euclidean loss. In addition, 70% of these datasets are divided into training sets, 10% into validation sets, and the remaining 20%

are used for test sets. We also select the optimal model parameters based on their performance on the validation set and subsequently apply them to the test set to obtain the final prediction results. The model parameters were selected based on validation set performance to ensure optimal generalization, with early stopping applied to prevent overfitting during training.

4.3 Performance Comparison

Table 3 presents a comparison of the performance of our DSTFGN model against several baseline models in forecasting temperature and humidity data for the next 24 hours using 48 hours of historical data. The experimental results demonstrate that the DSTFGN model outperforms the baseline models across the temperature and humidity datasets, consistently achieving lower MAE, MAPE, and RMSE values, as indicated by the Improvement column (relative to the best baseline ConvLSTM). For temperature forecasting, these represent improvements of 8.18% (MAE), 10.58% (MAPE), and 5.31% (RMSE). For the humidity dataset, the DSTFGN model similarly shows superior performance, with improvements of 0.19% (MAE), 5.22% (MAPE), and 8.88% (RMSE). These results highlight the DSTFGN model's significant advantage in capturing the spatial-temporal dependencies within weather time series data.

Additionally, the experimental results show that baseline models like Transformer and FC-LSTM, which only consider temporal connections without taking advantage of a spatio-temporal network spatial dependencies, have worse predictive accuracy on the temperature and humidity datasets. Table 3 illustrates that baseline models that take spatial dependencies into account, such as ST-GDN and STCNet, perform better than FC-LSTM and Transformer models, which have higher values for MAE, MAPE, and RMSE. In terms of experimental performance, models with spatial awareness outperform models that merely capture temporal dependencies because they can capture the spatio-temporal linkages within the data. Furthermore, FC-LSTM has drawbacks, including the incapacity to model spatial correlations among meteorological stations, which limits its precision in scenarios where atmospheric spatial dependencies—such as temperature fronts and pressure gradients—are essential for accurate forecasting. When working with long-term series data, its performance may be impacted by its sensitivity to input sequence length. Additionally, when

processing large datasets, FC-LSTM models often have a high computational complexity. Conversely, the Transformer model has its own set of difficulties. The self-attention mechanism quadratic scaling with sequence length causes it to struggle with excessive memory consumption, despite its superior ability to capture long-range temporal relationships. When working with huge datasets or long-term series, this reduces its effectiveness. Furthermore, Transformer models application in tasks requiring both spatial and temporal knowledge is limited since, like FC-LSTM, they are not naturally able to record spatial relationships. Finally, transformers are less appropriate for issues with sparse or limited data since they frequently need big datasets for efficient training.

Figure 4 visualizes the performance of eight models across three standard metrics (MAE, MAPE, and RMSE) for temperature forecasting. Each group of bars represents a model, and each bar shows the corresponding error or accuracy metric. It is evident that DSTFGN consistently achieves the lowest errors across all metrics, demonstrating its superiority in capturing both spatio-temporal patterns. This clear visualization helps in comparing model robustness and selecting the most effective one for deployment in real-time weather forecasting systems.

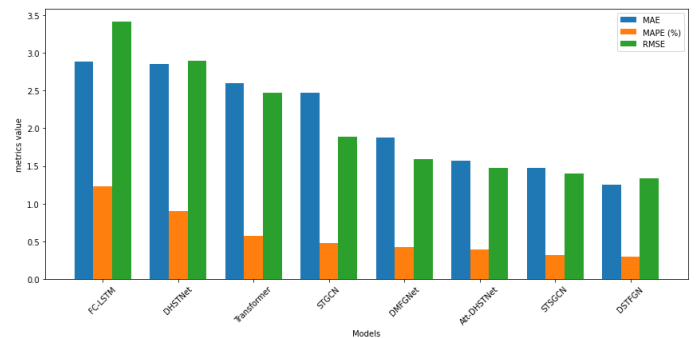


Figure 4. Comparison of different models.

The results demonstrate that although the Transformer and FC-LSTM models are excellent at capturing temporal dependencies, their predictive capabilities are constrained when spatial connections are not taken into account. However, models that combine temporal and spatial information, such as STGCN and STSGCN, are more equipped to identify intricate patterns in the data, which improves the accuracy of practical forecasting. This emphasizes how important it is to take into account the geographical dependencies of the monitoring station when forecasting time series. The observed performance discrepancy underscores

Table 3. Performance comparison of different models on the dataset (Improvement indicates % improvement of DSTFGN over the best baseline AAtt-DHSTNet).

Dataset	Metric	FC-LSTM	RNN-MT	Transformer	ST-GDN	DMFGNet	FG-Weather	STCNet	ConvLSTM	Improvement (%)
Temperature	MAE	2.882	2.653	2.201	2.090	1.879	1.564	1.473	1.235	8.18
	MAPE (%)	1.231	0.897	0.568	0.473	0.424	0.394	0.332	0.293	10.58
	RMSE	3.604	2.894	2.456	1.892	1.587	1.475	1.398	1.338	5.31
Humidity	MAE	11.298	10.219	10.165	9.904	9.542	9.186	8.673	7.921	0.19
	MAPE (%)	23.899	26.981	15.867	11.508	20.987	13.764	12.660	15.234	5.22
	RMSE	14.247	11.349	11.955	10.321	9.998	9.887	9.657	9.432	8.88

the potential of spatio-temporal networks to increase forecasting accuracy and the need to include spatial dependencies when creating weather forecasting models. Furthermore, FC-LSTM has drawbacks, such as its inability to account for spatial links in data, which might impair performance in tasks that need both spatio-temporal knowledge. Furthermore, FC-LSTM is sensitive to input sequence length, making it less effective for handling long-term relationships in big datasets. The Transformer model is effective at capturing long-range temporal dependencies, but it consumes a lot of memory due to the self-attention mechanism, which scales quadratically with sequence length. This can be especially challenging for large-scale datasets. Furthermore, like FC-LSTM, the Transformer does not capture spatial relationships by default, limiting its efficacy in tasks requiring both spatial and temporal awareness. Lastly, Transformer models typically need large datasets to perform well, making them less suitable for applications with limited or sparse data.

While STCNet employs hybrid spatio-temporal convolutions to capture spatial-temporal connections concurrently, it only considers local spatial-temporal dependencies and ignores long-term temporal dependencies. In contrast, our DSTFGN model takes into account both short-term and long-term temporal dependencies. Furthermore, our model shows an enhanced construction of both the static spatial adjacency matrix and the fusion graph adjacency matrix. As a result, the experimental results suggest that our DSTFGN model is strong and effective at representing spatio-temporal interdependence.

4.4 Ablation Study

To better demonstrate the usefulness of each component in our DSTFGN model, we conducted a comparative analysis with different variation models using a series of experimental assessments. The settings for each variant are described in Table 4.

- Case 1: This variant does not use the maximum information coefficient (MIC) to construct the

static spatial adjacency matrix. Instead, it solely relies on Euclidean distance to build the adjacency matrix.



- Case 2: This variant does not use the Transformer-based self-attention mechanism to capture short-term temporal dependencies (STD).
- Case 3: This form creates a spatial-temporal function graph without using the dynamic time warping (DTW) technique. Specifically, the spatial-temporal fusion graph is unique. The structure is based on both the temporal self-connection matrix and the static spatial adjacency matrix.
- Case 4: This variant does not use spatial-temporal graph fusion (STGF) to capture spatial-temporal dependencies simultaneously.
- Case 5: This approach avoids using graph attention networks to capture spatial dependencies (SD) between individual nodes.
- Case 6: Our DSTFGN model includes all the aforementioned modules.

According to the experimental results provided in Table 4, each module helps to improve the effectiveness of our approach. This is further confirmed by the visual representations in Figures 5 and 6, which show a graphical study of the model performance across various configurations. Figure 5 depicts the ablation study findings for the temperature dataset, highlighting the effect of each component on the model predicted accuracy. Figure 6 is a thorough graphical representation of the ablation study results for the humidity dataset.

When comparing different cases, particularly between Case 2 and Case 5, it is observed that in the temperature dataset, Case 2 outperforms Case 5 despite not accounting for long-term temporal dependencies, while Case 5 neglects spatial dependencies. This suggests that, for temperature forecasting, the importance of spatial dependencies for accurate

Table 4. Ablation experiment on different configurations of modules.

Name	MIC	STD	DTW	STGF	SD	Temperature			Humidity		
						MAE	MAPE (%)	RMSE	MAE	MAPE (%)	RMSE
case1	✗	✓	✓	✓	✓	1.492	0.487	1.794	10.198	14.998	10.986
case2	✓	✗	✓	✓	✓	1.693	0.487	1.986	9.982	17.189	11.197
case3	✓	✓	✗	✓	✓	1.582	0.435	0.998	7.957	14.975	9.983
case4	✓	✓	✓	✗	✓	1.701	0.542	1.992	8.967	17.992	10.893
case5	✓	✓	✓	✓	✗	1.896	0.567	1.984	11.091	15.987	11.991
case6	✓	✓	✓	✓	✓	0.923	1.061	1.476	7.982	13.994	8.897

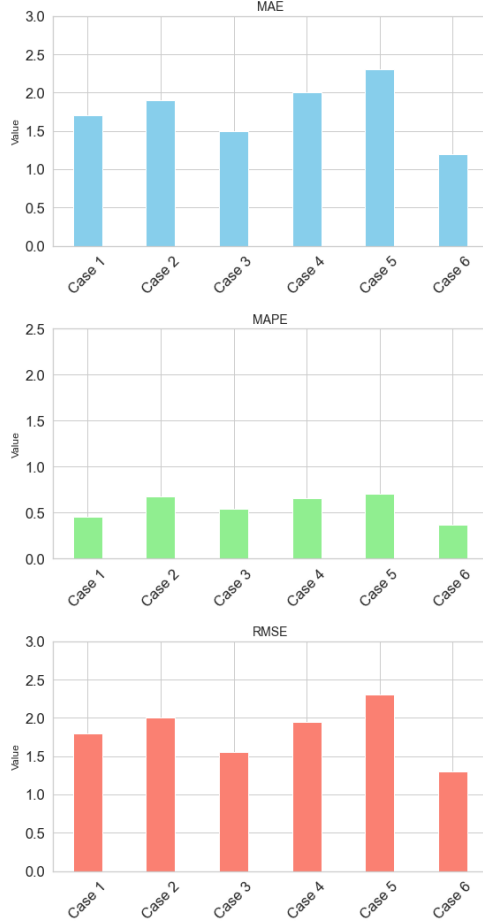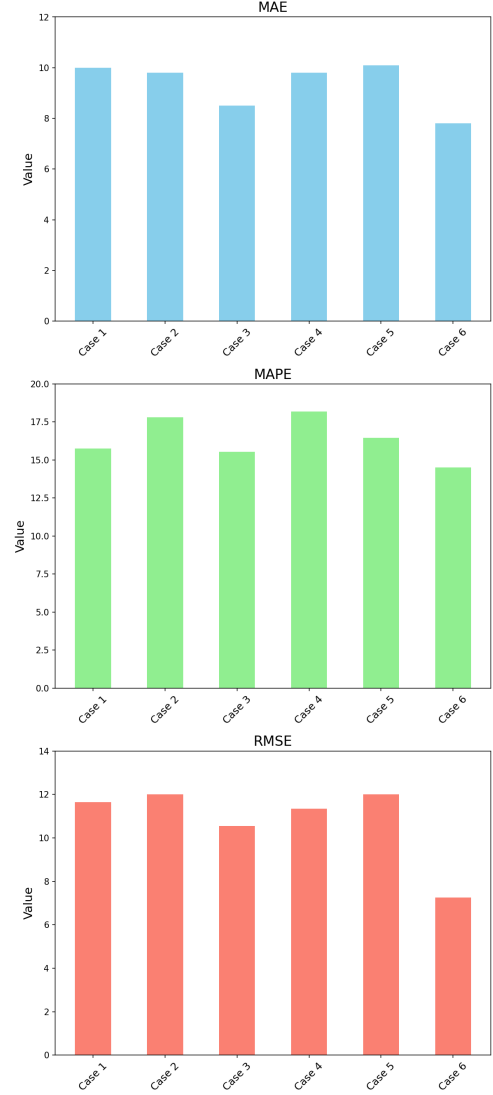**Figure 5.** Results of ablation experiment on the temperature dataset.**Figure 6.** Results of ablation experiment on the humidity dataset.

predictions outweighs that of long-term temporal dependencies. When comparing multiple situations, particularly Case 2 and 5, it is clear that, while Case 2 does not account for long-term temporal dependencies, it outperforms Case 5, which does not include geographical connections, on the temperature dataset. This shows that local dependencies are more important for accurate temperature forecasting than long-term temporal dependencies.

Case 3 significantly outperforms Case 4 in all parameters, with lower MAE, MAPE, and RMSE values. Using spatio-temporal fusion graphs can

help the model capture spatio-temporal relationships and improve prediction performance. Based on the results above, the following conclusions can be drawn: When considering the construction of the spatial adjacency matrix using MIC, the Transformer-based self-attention mechanism, the creation of the spatial-temporal fusion graph with the DTW algorithm, and the use of graph attention

networks, our DSTFGN model delivers the best performance in terms of prediction accuracy, achieving the lowest MAE, MAPE, and RMSE values. This demonstrates the effectiveness of incorporating these modules to capture spatio-temporal dependencies and enhance prediction performance. In contrast, models that rely solely on Euclidean distance, ignore long-term temporal dependencies, do not use the DTW algorithm, or overlook spatial dependencies perform poorly. Therefore, our DSTFGN model proves to be a promising and effective choice for weather forecasting tasks.

5 Discussion

5.1 Application Scenarios

The DSTFGN model, with its innovative approach to weather forecasting, holds significant potential for application across various industries. Its ability to capture complex spatio-temporal relationships makes it especially valuable in the agricultural sector, where accurate weather forecasts are essential for crop planting, growth, and harvesting. Farmers can leverage this information to make informed decisions about irrigation management and harvest scheduling. Additionally, precise temperature and humidity forecasts are crucial for energy demand forecasting, as they enable energy companies to optimize energy distribution and manage supply in the heating, cooling, and power sectors.

5.2 Limitations

Despite its great potential, the DSTFGN model has certain limitations. The performance of the model heavily depends on the quality of the meteorological data it receives. If the data contains numerous outliers or missing values, its predictive capabilities can be significantly compromised. In regions with sparse distribution of monitoring stations, the model may struggle to accurately capture spatial correlations of weather features and may fail to reflect local weather patterns with precision. Additionally, due to the complexity of its self-attention and graph attention network components, the model may require significant computational resources, which could be a constraint in resource-limited environments.

6 Related Work

We have divided this section into two sections: (i) spatio-temporal prediction approaches, (ii) Causal discovery.

6.1 Spatio-temporal models for weather forecasting

Weather forecasting involves analyzing atmospheric data, such as temperature, wind speed, and humidity [34]. Due to the significant temporal and regional fluctuations in atmospheric conditions, weather forecasting has always been a critical task, and recent studies have demonstrated that integrating deep learning with ensemble modeling substantially improves forecast robustness across diverse meteorological conditions [35]. Traditional forecasting methods rely on numerical weather prediction (NWP), which uses complex equations to model the atmospheric environment. NWP requires large amounts of data and substantial computational resources, and its ability to predict rare events is limited [36]. Furthermore, NWP has shown suboptimal performance in predicting short-term weather conditions, motivating data-driven approaches such as deep graph convolutional networks that directly learn spatio-temporal dependencies from multi-station meteorological observations [37]. Today, weather forecasting is primarily driven by computational methods, reducing the labor-intensive nature of earlier approaches [38]. In recent years, artificial intelligence-based data-driven models have been widely used in weather forecasting [39].

Recently, the task of urban and regional weather forecasting has garnered significant attention [21, 22, 40], with shared deep representation learning demonstrating strong capability for multi-element meteorological variable prediction across diverse weather conditions. Early studies used convolutional neural networks (CNN) and recurrent neural networks (RNN) to independently analyze the spatial and temporal dependencies of road networks. Later works have sought to integrate these methods to capture the overall dynamics of weather flow. For instance, [5] employed deep convolutional neural networks on cubed-sphere grids to extract spatial meteorological features for improved global weather prediction. Similarly, [23] applied deep learning techniques to forecast meteorological variables from historical station observations. However, these approaches mainly focus on local spatio-temporal features and may not fully capture the complex spatio-temporal dependencies inherent in transportation network structures. [1] provided a comprehensive survey of deep learning-based weather prediction methods, systematically reviewing CNN, RNN, and GNN architectures for meteorological

variable forecasting across diverse spatial and temporal scales.

Recently, Spatio-Temporal Graph Neural Networks (STGNNs) have shown exceptional effectiveness in capturing intricate spatio-temporal correlations, significantly advancing research in weather forecasting. Keisler [24] introduced graph neural networks for global weather forecasting using message passing to capture atmospheric spatial correlations, demonstrating that GNNs can effectively model the irregular spatial structure of meteorological observation networks. However, these methods are designed for predefined static adjacency matrices and fail to capture complex, dynamic spatio-temporal dependencies. To address the limitation of static graph structures in weather forecasting, [25] proposed FourCastNet, a global data-driven model using adaptive Fourier neural operators to dynamically represent evolving atmospheric dependencies at high spatial resolution. Similarly, [26] proposed Pangu-Weather, employing 3D neural networks with hierarchical temporal aggregation to dynamically extract atmospheric information across multiple scales, achieving highly accurate medium-range global weather predictions. [27] proposed multistream graph attention networks for wind speed forecasting, incorporating learnable adjacency matrices and attention mechanisms per meteorological variable to better exploit complex spatio-temporal characteristics of weather station data. While existing studies have yielded promising results, they do not simultaneously address the influences of temporal causal relationships and spatial dynamics in the propagation of weather between road nodes.

6.2 Causal discovery

The subject of causal discovery has received great interest, with pioneering contributions from multiple disciplines. This includes statistical approaches based on apriori knowledge and data-driven correlation-based modeling. Granger causality testing [11] is a well-established method for examining causal relationships between variables through time series forecasting. In [28] provided a non-linear Granger causality framework applied to climate time series, demonstrating that causal analysis of meteorological variables—such as temperature, humidity, and vegetation indices—can reveal directional dependencies that substantially improve understanding of atmospheric dynamics and weather propagation. In weather forecasting, [29] introduced

a comprehensive causal inference framework for climate time series, demonstrating that identifying directional causal relationships among atmospheric variables—such as temperature, pressure, and humidity—substantially improves the interpretability and accuracy of meteorological prediction models. Another noteworthy approach is DYNOTEARS [30], which performs structure learning directly from time-series data by combining dynamic Bayesian network constraints with continuous optimization, enabling efficient causal graph construction from sequential meteorological observations. PCMC [31] extends this approach to large, nonlinear time-series datasets by incorporating nonlinear conditional independence tests. More recently, TCDF [32] combined attention mechanisms with temporal convolutional neural networks for data-driven causal analysis. Causal analysis has been widely studied across various fields [33]. However, few studies have integrated causal analysis results into models to enhance their performance. There is still a need to develop effective methodologies for utilizing and analyzing the results of causal discovery.

7 Conclusions and Future Work

In this paper, we introduce a Spatio-Temporal Dynamic Fusion Graph Network (DSTFGN) model, which leverages causal analysis to address urban weather forecasting challenges. To tackle the dynamic spatial dependencies and the temporal causal effects present in weather scenarios, DSTFGN integrates Granger causality theory with deep learning techniques. This allows the model to effectively capture spatial correlations and causal relationships between road nodes using node attribute features. Specifically, DSTFGN learns the causal graph structure through Granger causality testing with historical node lags, while concurrently learning the adaptive graph structure based on node embeddings. Additionally, the model addresses the heterogeneity of road nodes through a spatial-temporal attention module. Experimental results show that our model performs exceptionally well on real-world datasets, demonstrating its effectiveness in predicting complex weather. In comparison to existing spatio-temporal graph models utilizing graph neural networks, our approach not only reduces the reliance on predefined adjacency matrices but also explores dynamic characteristics embedded in node data via dynamic causal analysis, resulting in more accurate predictions.

Our future research could focus on improving

the model adaptability to real-time data, allowing it to dynamically respond to emerging weather patterns. This would be particularly beneficial for generating more accurate short-term forecasts. Additionally, exploring the application of the model in other spatial-temporal forecasting domains, such as public health, could be valuable. In this context, spatial-temporal predictions could help forecast the spread and velocity of infectious diseases, thus aiding in the development of disease prevention and control strategies. By addressing current limitations and expanding into new application areas, the DSTFGN model could evolve further to meet the changing demands of various industries and contribute to a broader range of fields.

Data Availability Statement

Data will be made available on request.

Funding

This work was supported in part by the National Natural Science Foundation of China under Grant 62373255; in part by the Natural Science Foundation of Guangdong Province under Grant 2024A1515011204; in part by the Shenzhen Natural Science Fund through the Stable Support Plan Program under Grant 20220809175803001; in part by the Open Fund of National Engineering Laboratory for Big Data System Computing Technology under Grant SZU-BDSC-OF2024-15.

Conflicts of Interest

The authors declare no conflicts of interest.

Ethical Approval and Consent to Participate

Not applicable.

References

- [1] Ren, X., Li, X., Ren, K., Song, J., Xu, Z., Deng, K., & Wang, X. (2021). Deep learning-based weather prediction: a survey. *Big Data Research*, 23, 100178. [\[CrossRef\]](#)
- [2] Hewage, P., Behera, A., Trovati, M., Pereira, E., Ghahremani, M., Palmieri, F., & Liu, Y. (2020). Temporal convolutional neural (TCN) network for an effective weather forecasting using time-series data from the local weather station. *Soft Computing*, 24(21), 16453-16482. [\[CrossRef\]](#)
- [3] Khan, M. M. H., Mustafa, M. R. U., Hossain, M. S., Shams, S., & Julius, A. D. (2023). Short-term and long-term rainfall forecasting using arima model. *International Journal of Environmental Science and Development*, 14(5), 292-298. [\[CrossRef\]](#)
- [4] Jin, M., Koh, H. Y., Wen, Q., Zambon, D., Alippi, C., Webb, G. I., ... & Pan, S. (2024). A survey on graph neural networks for time series: Forecasting, classification, imputation, and anomaly detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*. [\[CrossRef\]](#)
- [5] Weyn, J. A., Durran, D. R., & Caruana, R. (2020). Improving data-driven global weather prediction using deep convolutional neural networks on a cubed sphere. *Journal of Advances in Modeling Earth Systems*, 12(9), e2020MS002109. [\[CrossRef\]](#)
- [6] Lira, H., Martí, L., & Sanchez-Pi, N. (2022). A graph neural network with spatio-temporal attention for multi-sources time series data: An application to frost forecast. *Sensors*, 22(4), 1486. [\[CrossRef\]](#)
- [7] Lam, R., Sanchez-Gonzalez, A., Willson, M., Wirnsberger, P., Fortunato, M., Alet, F., ... & Battaglia, P. (2023). Learning skillful medium-range global weather forecasting. *Science*, 382(6677), 1416-1421. [\[CrossRef\]](#)
- [8] Ma, M., Xie, P., Teng, F., Wang, B., Ji, S., Zhang, J., & Li, T. (2023). HiSTGNN: Hierarchical spatio-temporal graph neural network for weather forecasting. *Information Sciences*, 648, 119580. [\[CrossRef\]](#)
- [9] Zhang, F. H., & Shao, Z. G. (2023). ST-GRF: Spatiotemporal graph neural networks for rainfall forecasting. *Digital Signal Processing*, 136, 103989. [\[CrossRef\]](#)
- [10] Gao, Z., Li, Z., Zhang, H., Yu, J., & Xu, L. (2023). Dynamic spatiotemporal interactive graph neural network for multivariate time series forecasting. *Knowledge-Based Systems*, 280, 110995. [\[CrossRef\]](#)
- [11] Silva, F. N., Vega-Oliveros, D. A., Yan, X., Flammini, A., Menczer, F., Radicchi, F., ... & Fortunato, S. (2021). Detecting climate teleconnections with Granger causality. *Geophysical Research Letters*, 48(18), e2021GL094707. [\[CrossRef\]](#)
- [12] Sun, G., Zhao, Y., & Qi, X. (2025). Sequence to sequence architecture based on hybrid LSTM global and local encoders approach for meteorological factors forecasting. *Scientific reports*, 15(1), 22753. [\[CrossRef\]](#)
- [13] Nketiah, E. A., Chenlong, L., Yingchuan, J., & Aram, S. A. (2023). Recurrent neural network modeling of multivariate time series and its application in temperature forecasting. *Plos one*, 18(5), e0285713. [\[CrossRef\]](#)
- [14] Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., ... & Polosukhin, I. (2017). Attention is all you need. *Advances in neural information processing systems*, 30.
- [15] Khodayar, M., & Wang, J. (2018). Spatio-temporal graph deep neural network for short-term wind speed forecasting. *IEEE Transactions on Sustainable Energy*,

- 10(2), 670-681. [CrossRef]
- [16] Hewage, P., Trovati, M., Pereira, E., & Behera, A. (2021). Deep learning-based effective fine-grained weather forecasting model. *Pattern Analysis and Applications*, 24(1), 343-366. [CrossRef]
- [17] Xiang, L., Xiang, J., Guan, J., Zhang, L., Cao, Z., & Xia, J. (2022). Spatiotemporal forecasting model based on hybrid convolution for local weather prediction post-processing. *Frontiers in Earth Science*, 10, 978942. [CrossRef]
- [18] Abdulla, N., Demirci, M., & Ozdemir, S. (2022). Design and evaluation of adaptive deep learning models for weather forecasting. *Engineering Applications of Artificial Intelligence*, 116, 105440. [CrossRef]
- [19] Guo, A., Liu, Y., Shao, S., Jia, S., Shi, X., & Feng, Z. (2024, November). Spatial-Temporal Graph Attention Networks Based on Novel Adjacency Matrix for Weather Forecasting. In *EAI International Conference on Collaborative Computing: Networking, Applications and Worksharing* (pp. 24-41). Cham: Springer Nature Switzerland. [CrossRef]
- [20] Shi, X., Chen, Z., Wang, H., Yeung, D. Y., Wong, W. K., & Woo, W. C. (2015). Convolutional LSTM network: A machine learning approach for precipitation nowcasting. *Advances in neural information processing systems*, 28.
- [21] Espenholt, L., Agrawal, S., Sønderby, C., Kumar, M., Heek, J., Bromberg, C., ... & Kalchbrenner, N. (2022). Deep learning for twelve hour precipitation forecasts. *Nature communications*, 13(1), 5145. [CrossRef]
- [22] Sønderby, C. K., Espenholt, L., Heek, J., Dehghani, M., Oliver, A., Salimans, T., ... & Kalchbrenner, N. (2020). Metnet: A neural weather model for precipitation forecasting. *arXiv preprint arXiv:2003.12140*. [CrossRef]
- [23] Salman, A. G., Kanigoro, B., & Heryadi, Y. (2015, October). Weather forecasting using deep learning techniques. In *2015 international conference on advanced computer science and information systems (ICACSIS)* (pp. 281-285). IEEE. [CrossRef]
- [24] Keisler, R. (2022). Forecasting global weather with graph neural networks. *arXiv preprint arXiv:2202.07575*. [CrossRef]
- [25] Pathak, J., Subramanian, S., Harrington, P., Raja, S., Chattopadhyay, A., Mardani, M., ... & Anandkumar, A. (2022). Fourcastnet: A global data-driven high-resolution weather model using adaptive fourier neural operators. *arXiv preprint arXiv:2202.11214*. [CrossRef]
- [26] Bi, K., Xie, L., Zhang, H., Chen, X., Gu, X., & Tian, Q. (2023). Accurate medium-range global weather forecasting with 3D neural networks. *Nature*, 619(7970), 533-538. [CrossRef]
- [27] Aykas, D., & Mehrkanon, S. (2021, December). Multistream graph attention networks for wind speed forecasting. In *2021 IEEE Symposium Series on Computational Intelligence (SSCI)* (pp. 1-8). IEEE. [CrossRef]
- [28] Papagiannopoulou, C., Miralles, D. G., Decubber, S., Demuzere, M., Verhoest, N. E., Dorigo, W. A., & Waegeman, W. (2017). A non-linear Granger-causality framework to investigate climate-vegetation dynamics. *Geoscientific Model Development*, 10(5), 1945-1960. [CrossRef]
- [29] Runge, J., Gerhardus, A., Varando, G., Eyring, V., & Camps-Valls, G. (2023). Causal inference for time series. *Nature Reviews Earth & Environment*, 4(7), 487-505. [CrossRef]
- [30] Pamfil, R., Sriwattanaworachai, N., Desai, S., Pilgerstorfer, P., Georgatzis, K., Beaumont, P., & Aragam, B. (2020, June). Dynotears: Structure learning from time-series data. In *International Conference on Artificial Intelligence and Statistics* (pp. 1595-1605). Pmlr.
- [31] Runge, J., Nowack, P., Kretschmer, M., Flaxman, S., & Sejdinovic, D. (2019). Detecting and quantifying causal associations in large nonlinear time series datasets. *Science advances*, 5(11), eaau4996. [CrossRef]
- [32] Nauta, M., Bucur, D., & Seifert, C. (2019). Causal discovery with attention-based convolutional neural networks. *Machine Learning and Knowledge Extraction*, 1(1), 19. [CrossRef]
- [33] Guo, R., Cheng, L., Li, J., Hahn, P. R., & Liu, H. (2020). A survey of learning causality with data: Problems and methods. *ACM Computing Surveys (CSUR)*, 53(4), 1-37. [CrossRef]
- [34] Fathi, M., Haghi Kashani, M., Jameii, S. M., & Mahdipour, E. (2022). Big data analytics in weather forecasting: A systematic review. *Archives of Computational Methods in Engineering*, 29(2), 1247-1275. [CrossRef]
- [35] Al Sukhni, H., Sakr, F., Alsmadi, M. K., Abd-Elghany, M., Gomaa, I. A., & Abdallah, S. (2025). Data-Driven Weather Prediction: Integrating Deep Learning and Ensemble Models for Robust Weather Forecasting. *Journal of Cybersecurity & Information Management*, 15(2). [CrossRef]
- [36] Brotzge, J. A., Berchoff, D., Carlis, D. L., Carr, F. H., Carr, R. H., Gerth, J. J., ... & Wang, X. (2023). Challenges and opportunities in numerical weather prediction. *Bulletin of the American Meteorological Society*, 104(3), E698-E705. [CrossRef]
- [37] García-Duarte, L., Cifuentes, J., & Marulanda, G. (2023). Short-term spatio-temporal forecasting of air temperatures using deep graph convolutional neural networks. *Stochastic Environmental Research and Risk Assessment*, 37(5), 1649-1667. [CrossRef]
- [38] Haupt, S. E., Cowie, J., Linden, S., McCandless, T., Kosovic, B., & Alessandrini, S. (2018, October). Machine learning for applied weather prediction. In *2018 IEEE 14th international conference on e-science*

(*e-Science*) (pp. 276-277). IEEE. [CrossRef]

- [39] Schultz, M. G., Betancourt, C., Gong, B., Kleinert, F., Langguth, M., Leufen, L. H., ... & Stadler, S. (2021). Can deep learning beat numerical weather prediction?. *Philosophical Transactions of the Royal Society A*, 379(2194), 20200097. [CrossRef]
- [40] Mehrkanoon, S. (2019). Deep shared representation learning for weather elements forecasting. *Knowledge-Based Systems*, 179, 120-128. [CrossRef]



Ahmad Ali received the master's and Ph.D. degrees from Shanghai Jiao Tong University, China, where he developed a solid foundation in computer science and engineering. Currently, he is a Postdoctoral Researcher with the College of Mechatronics and Control Engineering, Shenzhen University, China. In addition to his reviewing activities, he has been involved in several cutting-edge research projects. His work has led to numerous

publications in top-tier journals and conferences, showcasing his expertise and contributions to the field. He is passionate about leveraging technology to solve real-world problems, particularly in urban environments where efficient data processing and intelligent decision-making are crucial. His research interests include deep learning, big data analytics, data mining, urban computing, cloud computing, and fog computing. He has reviewed over a thousand research articles for prestigious academic journals, such as Information Sciences, Information Fusion, Neural Networks, IEEE Internet of Things Journal, Neural Computing and Applications, Multimedia Tools and Application, Wireless Networks, and IEEE Access. (Email: ahmadali@szu.edu.cn)



Hafiz Muhammad Yasir Naeem received the B.S. degree in Electrical Engineering from Bahria University Islamabad, Pakistan in 2013, M.S. degree in control systems from University of Engineering and Technology (UET), Taxila, Pakistan, in 2016 and Ph.D. degree from the Capital University of Science and Technology, Islamabad, Pakistan in 2023. His research interests include energy-efficient optimization strategies for EVs, Model Predictive Control

and optimal control. Currently, He is a postdoctoral fellow at the College of Mechatronics and Control Engineering, and the College of Computer Science and Software Engineering at Shenzhen University, Shenzhen, China. (Email: yasirnaem945@szu.edu.cn)



Riaz Ali is a distinguished CAS-TWAS PhD President's Fellow in Computer Applied Technology (Data Mining) with a focus on Meteorology. He has authored over 12 publications in renowned journals and conferences, including AGU Earth and Space Science, Atmospheric Research, Sustainability, and others. His research primarily centers on the quantitative forecasting of rainfall and storm surges associated with both landfalling

and offshore tropical cyclones along the Guangdong and Hong

Kong coasts. His broader academic interests include the spatio-temporal analysis of typhoon hazards, the application of artificial intelligence in weather forecasting, and natural hazard and risk assessment. (Email: riazbabuzai@sjtu.edu.cn)

Mujtaba Asad completed his PhD from Shanghai Jiao Tong university, China. Currently he is Postdoctoral Researcher at Shanghai Jiao Tong university, China. His research interest deal with programming languages, artificial neural networks, image processing, computer engineering etc. Dr. Asad has published a couple of research articles in well reputable journals including Advanced Engineering Informatics, Applied Intelligence etc. (Email: asadmujtaba@sjtu.edu.cn)



Md. Belal Bin Heyat received his B.Tech in Electronics and Instrumentation (EI) and M.Tech in Electronics Circuit and System (ECS) from Integral University, Lucknow, India, in 2014 and 2016. He completed his Ph.D. in Electronic Science and Technology from the University of Electronic Science and Technology of China (UESTC), Chengdu, China. During his Ph.D., he won nine awards and served as a Research Associate,

Vice-Chairman of the UESTC Country League, and Country Representative for India. He worked as a Postdoctoral Fellow at the IoT Research Center, College of Computer Science and Software Engineering, Shenzhen University, China, from 2021 to 2023. Currently, he is a Postdoctoral Fellow at the CenBRAIN Neurotech Center of Excellence, Westlake University, China. He is also a visiting postdoctoral researcher at the Center for Visual Information Technology (CVET), IIIT Hyderabad, India, and a faculty member in the Department of Science and Engineering at Novel Global Community Educational Foundation, NSW, Australia. Dr. Heyat's research focuses on detecting diseases such as sleep, neurological, and psycho-neurological disorders, as well as cardiovascular conditions. He specializes in signal processing and medical machine learning. He is a Guest Editor for journals like Life, Journal of Integrative Neuroscience, and Applied Sciences. He also reviews research for publishers such as Oxford University Press, IEEE, Elsevier, Hindawi, Wiley, Springer, MDPI, and Bentham Science. Dr. Heyat has published more than 70 articles (h-index: 25) in respected international journals and conferences. His work aims to improve healthcare using AI, advanced signal processing techniques, and traditional system of medicine. (Email: belalheyat@gmail.com)



Tamam Alsarhan received the Ph.D. degree from Shanghai Jiao Tong University, specializing in computer vision, and deep learning. During her academic career, she has contributed significantly to the computer vision area. She was a Visiting Researcher at Khalifa University. She is currently an Assistant Professor with The University of Jordan. Her research interests include computer vision, human action recognition,

machine learning, and pattern recognition. In addition to her research, she is dedicated to teaching and mentoring students, aiming to inspire the next generation of scientists and researchers. (Email: t_alsarhan@ju.edu.jo)